




LL-1355-13BHT

The LL-1355-13BHT filter has been designed to operate with two VICOR Harmonic Attenuator Modules (HAM).

This filter was specifically designed to allow the Vicor HAM and associated power converters to meet Mil-Std-461C or Mil-Std-461D, E or F

This version of the filter is configured for those applications where a chassis mount for the filter is preferred.

Order P/N: LL-1355-13BHT


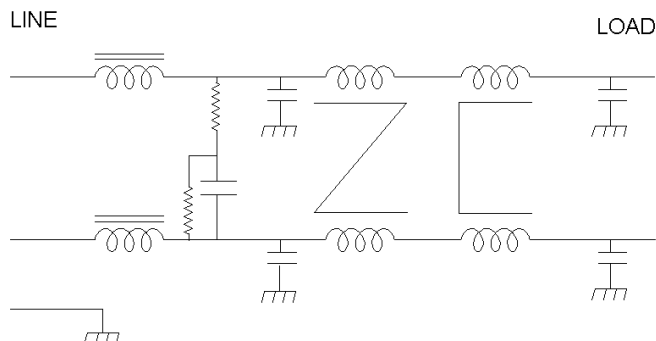


Operating Voltage = _____ 85 to 250 V
 Operating Current = _____ 13 Amp
 Operating Frequency = _____ 50/400 Hz
 Operating Temperature, High = _____ 70°C
 Operating Temperature, Low = _____ -40°C

Diel. Withstanding (line - case) = _____ 1500 Vac
 Diel. Withstanding (line - line) = _____ 1500 Vdc

Leakage Current = _____ 2.5 ma @ 220 V, 60 Hz
 Max Residual Voltage after 1 sec = _____ 34 Volts

Calculated MTBF = _____ 2,142,107 Hrs @ 30°C GB

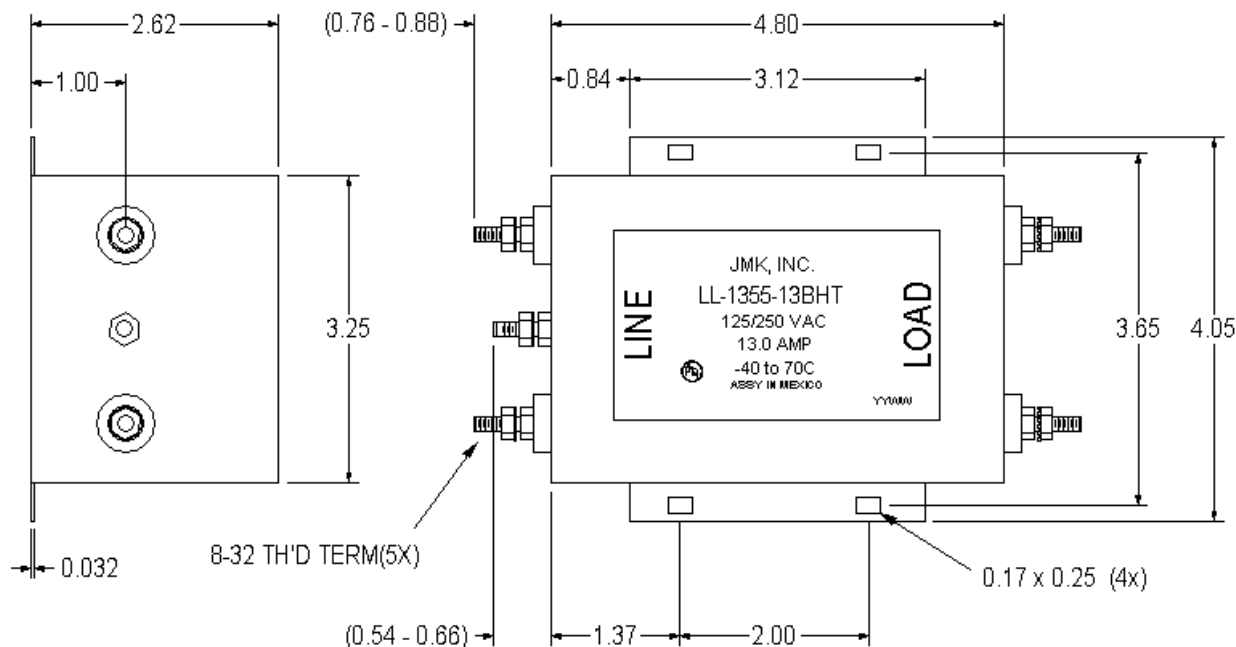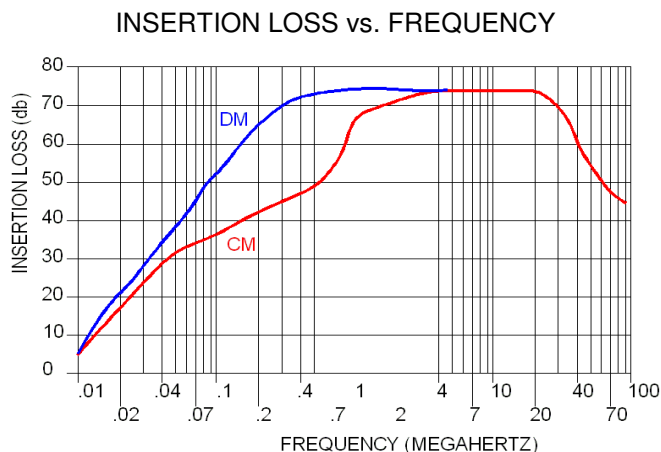

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884