


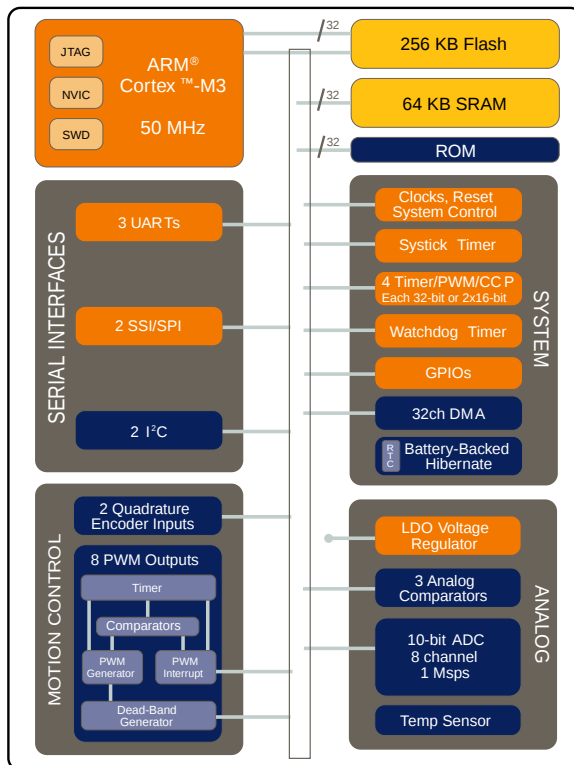

LM3S1000 Series Block Diagram. This block diagram shows the superset of features for the LM3S1000 series of microcontrollers.

Features

32-Bit RISC Performance

- 50-MHz operation with 32-bit ARM® Cortex™-M3 architecture
- Thumb®-compatible Thumb-2-only instruction set, with hardware-division and single-cycle-multiplication
- Integrated Nested Vectored Interrupt Controller (NVIC) provides deterministic interrupt handling
- 34 interrupt channels with eight priority levels
- Memory protection unit (MPU) provides a privileged mode for protected operating system functionality
- Unaligned data access enables data to be efficiently packed into memory
- Atomic bit manipulation (bit-banding) delivers maximum memory utilization and streamlined peripheral control

On-Chip Memory

- 64 KB single-cycle flash with two forms of flash protection on a 2-KB block basis
- 16 KB single-cycle SRAM

Flexible Timer Capability

- Four general-purpose timers, each configurable as one 32-bit or two 16-bit timers
- Real-Time Clock (RTC) capability
- 24-bit system (SysTick) timer
- 32-bit watchdog timer

Serial Interfaces

- Two synchronous serial interfaces (SSI) with master and slave modes for SPI, MICROWIRE, or TI synchronous serial
- Two I²C interfaces (master and slave)
- Three fully programmable 16C550-type UARTs with IrDA support

UART

- Three fully programmable 16C550-type UARTs with IrDA support
- Separate 16x8 transmit (TX) and 16x12 receive (RX) FIFOs to reduce CPU interrupt service loading
- Programmable baud-rate generator allowing speeds up to up to 3.125 Mbps

Analog-to-Digital Converter (ADC)

- Single- and differential-input configurations
- Eight 10-bit channels (inputs) when used as single-ended inputs
- Sample rate of one million samples/second
- On-chip temperature sensor

Analog Comparators

- Three independent integrated analog comparators
- Configurable for output to: drive an output pin, generate an interrupt, or initiate an ADC sample sequence
- Compare external pin input to external pin input or to internal programmable voltage reference

Inter-Integrated Circuit (I²C) Interface

- Two I²C modules
- Master and slave receive and transmit operation with transmission speed up to 100 Kbps in Standard mode and 400 Kbps in Fast mode
- Interrupt generation
- Master with arbitration and clock synchronization, multimaster support, and 7-bit addressing mode

GPIOs

- 9-46 GPIOs, depending on configuration
- 5-V-tolerant input/outputs
- Programmable interrupt generation
- Fast toggle capable of a change every two clock cycles
- Can initiate an ADC sample sequence

Power

- On-chip Low Drop-Out (LDO) voltage regulator, with programmable output user-adjustable from 2.25 V to 2.75 V
- Battery-backed hibernation module with real-time clock and 256-bytes of non-volatile memory
- 3.3-V supply brown-out detection
- Low-power options on controller: Sleep and Deep-sleep modes
- Low-power options for peripherals: software controls shutdown of individual peripherals
- User-enabled LDO unregulated voltage detection and automatic reset
- On-chip temperature sensor

LM3S1138 Microcontroller


STELLARIS®
microcontrollers

Package and Temperature

- 100-pin RoHS-compliant LQFP package
 - Industrial-range (-40°C to +85°C)
 - Extended-range (-40°C to +105°C)
- 108-ball RoHS-compliant BGA package
 - Industrial-range (-40°C to +85°C)

Target Applications

- Motion control
- Factory automation
- Fire and security
- HVAC and building control
- Test and measurement equipment
- Remote monitoring
- Electronic point-of-sale (POS) machines
- Network appliances and switches
- Gaming equipment

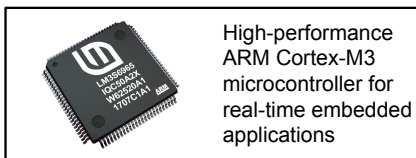

Ordering Information

Orderable Part Number	Description
LM3S1138-IBZ50-A2	Stellaris® LM3S1138 Microcontroller Industrial Temperature 108-ball BGA
LM3S1138-IBZ50-A2T	Stellaris® LM3S1138 Microcontroller Industrial Temperature 108-ball BGA Tape-and-reel
LM3S1138-EQC50-A2	Stellaris® LM3S1138 Microcontroller Extended Temperature 100-pin LQFP
LM3S1138-EQC50-A2T	Stellaris® LM3S1138 Microcontroller Extended Temperature 100-pin LQFP Tape-and-reel
LM3S1138-IQC50-A2	Stellaris® LM3S1138 Microcontroller Industrial Temperature 100-pin LQFP
LM3S1138-IQC50-A2T	Stellaris® LM3S1138 Microcontroller Industrial Temperature 100-pin LQFP Tape-and-reel

Evaluation Kit

The Stellaris® LM3S1968 Evaluation Kit provides the hardware and software tools to speed development using the LM3S1968 microcontroller's peripherals and Hibernation module. Ask your distributor for part number EKK-LM3S1968 (ARM RealView® MDK tools), EKI-LM3S1968 (IAR Embedded Workbench® tools), EKC-LM3S1968 (CodeSourcery Sourcery G++ tools), or EKT-LM3S1968 (Code Red Technologies Red Suite tools). See the website for the latest tools available.



Texas Instruments, Inc. • 108 Wild Basin, Suite 350 • Austin, TX 78746
Main: +1-512-279-8800 • Fax: +1-512-279-8879 • <http://www.luminarymicro.com>

Copyright © 2008-2009 Texas Instruments, Inc. All rights reserved. Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.

PB-LM3S1138-02

