

# LM431SA, LM431SB, LM431SC

## Programmable Shunt Regulator

### Description

The LM431SA / LM431SB / LM431SC are three-terminal the output adjustable regulators with thermal stability over operating temperature range. The output voltage can be set any value between  $V_{REF}$  (approximately 2.5 V) and 36 V with two external resistors. These devices have a typical dynamic output impedance of 0.2  $\Omega$ . Active output circuit provides a sharp turn-on characteristic, making these devices excellent replacement for zener diodes in many applications.

### Features

- Programmable Output Voltage to 36 V
- Low Dynamic Output Impedance: 0.2  $\Omega$  (Typical)
- Sink Current Capability: 1.0 to 100 mA
- Equivalent Full-Range Temperature Coefficient of 50 ppm/ $^{\circ}$ C (Typical)
- Temperature Compensated for Operation Over Full Rated Operating Temperature Range
- Low Output Noise Voltage
- Fast Turn-on Response
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### ORDERING INFORMATION

| Product Number | Output Voltage Tolerance | Operating Temperature | Top Mark <sup>(1)</sup> | Package     | Shipping <sup>†</sup> |
|----------------|--------------------------|-----------------------|-------------------------|-------------|-----------------------|
| LM431SACMFX    | 2%                       | −25 to +85°C          | 43A □                   | SOT-23FL 3L | Tape and Reel         |
| LM431SACM3X    |                          |                       | 43L ⊙                   | SOT-23 3L   |                       |
| LM431SACM32X   |                          |                       | 43G ⊙                   | SOT-23 3L   |                       |
| LM431SBCMLX    | 43B                      |                       | SOT-89 3L               |             |                       |
| LM431SBCMFX    | 43B □                    |                       | SOT-23FL 3L             |             |                       |
| LM431SBCM3X    | 43M ⊙                    |                       | SOT-23 3L               |             |                       |
| LM431SBCM32X   | 43H ⊙                    |                       | SOT-23 3L               |             |                       |
| LM431SCCMLX    | 0.5%                     |                       | 43C                     | SOT-89 3L   |                       |
| LM431SCCMFX    |                          |                       | 43C □                   | SOT-23FL 3L |                       |
| LM431SCCM3X    |                          |                       | 43N ⊙                   | SOT-23 3L   |                       |
| LM431SCCM32X   |                          |                       | 43J ⊙                   | SOT-23 3L   |                       |
|                |                          |                       |                         |             |                       |
| LM431SAIMFX    | 2%                       | −40 to +85°C          | 43AI                    | SOT-23FL 3L |                       |
| LM431SBIMFX    | 1%                       |                       | 43BI                    | SOT-23FL 3L |                       |
| LM431SCIMFX    | 0.5%                     |                       | 43CI                    | SOT-23FL 3L |                       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

1. SOT-23 and SOT-23FL have basically four-character marking except LM431SAIMFX. (3 letters for device code + 1 letter for date code) SOT-23FL date code is composed of 1 digit numeric or alphabetic week code adding bar-type year code.



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



1  
SOT-89  
CASE 528AH

1. Ref
2. Anode
3. Cathode



3  
SOT-23FL  
CASE 419BD

1. Cathode
2. Ref
3. Anode



3  
SOT-23  
CASE 318BM

- |            |            |
|------------|------------|
| M32        | M3         |
| 1. Ref     | 1. Cathode |
| 2. Cathode | 2. Ref     |
| 3. Anode   | 3. Anode   |

# LM431SA, LM431SB, LM431SC

## Block Diagram

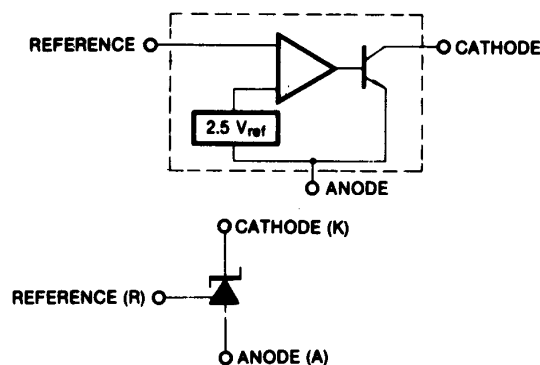


Figure 1. Block Diagram

## ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted)

| Symbol           | Parameter                              |                                 | Value           | Unit |
|------------------|----------------------------------------|---------------------------------|-----------------|------|
| V <sub>KA</sub>  | Cathode Voltage                        |                                 | 37              | V    |
| I <sub>KA</sub>  | Cathode current Range (Continuous)     |                                 | –100 to +150    | mA   |
| I <sub>REF</sub> | Reference Input Current Range          |                                 | –0.05 to +10.00 | mA   |
| R <sub>θJA</sub> | Thermal Resistance Junction–Air (2, 3) | ML Suffix Package (SOT–89)      | 220             | °C/W |
|                  |                                        | MF Suffix Package (SOT–23FL)    | 350             |      |
|                  |                                        | M32, M3 Suffix Package (SOT–23) | 400             |      |
| P <sub>D</sub>   | Power Dissipation (4, 5)               | ML Suffix Package (SOT–89)      | 560             | mW   |
|                  |                                        | MF Suffix Package (SOT–23FL)    | 350             |      |
|                  |                                        | M32, M3 Suffix Package (SOT–23) | 310             |      |
| T <sub>J</sub>   | Junction Temperature                   |                                 | 150             | °C   |
| T <sub>OPR</sub> | Operating Temperature Range            | All products except LM431SAIMFX | –25 to +85      | °C   |
|                  |                                        | LM431SAIMFX, SBIMFX, SCIMFX     | –40 to +85      |      |
| T <sub>STG</sub> | Storage Temperature Range              |                                 | –65 to +150     | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. Thermal resistance test board

Size: 1.6 mm x 76.2 mm x 114.3 mm (1S0P) JEDEC Standard: JESD51–3, JESD51–7.

3. Assume no ambient airflow.

4. T<sub>JMAX</sub> = 150°C; ratings apply to ambient temperature at 25°C.

5. Power dissipation calculation: P<sub>D</sub> = (T<sub>J</sub> – T<sub>A</sub>) / R<sub>θJA</sub>.

## RECOMMENDED OPERATING CONDITIONS

| Symbol          | Parameter       | Min.             | Max. | Unit |
|-----------------|-----------------|------------------|------|------|
| V <sub>KA</sub> | Cathode Voltage | V <sub>REF</sub> | 36   | V    |
| I <sub>KA</sub> | Cathode Current | 1                | 100  | mA   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# LM431SA, LM431SB, LM431SC

## ELECTRICAL CHARACTERISTICS (Note 6, Values are at $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Symbol       | Parameter                                                                   | Conditions                                       |                    | LM431SA |       |       | LM431SB |       |       | LM431SC |       |       | Unit |
|--------------|-----------------------------------------------------------------------------|--------------------------------------------------|--------------------|---------|-------|-------|---------|-------|-------|---------|-------|-------|------|
|              |                                                                             |                                                  |                    | Min.    | Typ.  | Max.  | Min.    | Typ.  | Max.  | Min.    | Typ.  | Max.  |      |
| VREF         | Reference Input Voltage                                                     | VKA = VREF, IKA = 10 mA                          |                    | 2.450   | 2.500 | 2.550 | 2.470   | 2.495 | 2.520 | 2.482   | 2.495 | 2.508 | V    |
| ΔVREF / ΔT   | Deviation of Reference Input Voltage Over- Temperature                      | VKA = VREF, IKA = 10 mA<br>TMIN ≤ TA ≤ TMAX      | SOT-89<br>SOT-23FL |         | 4.5   | 17.0  |         | 4.5   | 17.0  |         | 4.5   | 17.0  | mV   |
|              |                                                                             |                                                  | SOT-23             |         | 6.6   | 24    |         | 6.6   | 24    |         | 6.6   | 24    | mV   |
| ΔVREF / ΔVKA | Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage | IKA=10 mA                                        | ΔVKA = 10 V-VREF   |         | -1.0  | -2.7  |         | -1.0  | -2.7  |         | -1.0  | -2.7  | mV/V |
|              |                                                                             |                                                  | ΔVKA = 36 V - 10 V |         | -0.5  | -2.0  |         | -0.5  | -2.0  |         | -0.5  | -2.0  |      |
| IREF         | Reference Input Current                                                     | IKA = 10 mA, R1 = 10 KΩ, R2 = ∞                  |                    |         | 1.5   | 4.0   |         | 1.5   | 4.0   |         | 1.5   | 4.0   | μA   |
| ΔIREF / ΔT   | Deviation of Reference Input Current Over Full Temperature Range            | IKA = 10 mA, R1 = 10 KΩ, R2 = ∞, TA = Full Range | SOT-89<br>SOT-23FL |         | 0.4   | 1.2   |         | 0.4   | 1.2   |         | 0.4   | 1.2   | μA   |
|              |                                                                             |                                                  | SOT-23             |         | 0.8   | 2.0   |         | 0.8   | 2.0   |         | 0.8   | 2.0   | μA   |
| IKA(MIN)     | Minimum Cathode Current for Regulation                                      | VKA = VREF                                       |                    |         | 0.45  | 1.00  |         | 0.45  | 1.00  |         | 0.45  | 1.00  | mA   |
| IKA(OFF)     | Off -Stage Cathode Current                                                  | VKA = 36 V, VREF = 0                             |                    |         | 0.05  | 1.00  |         | 0.05  | 1.00  |         | 0.05  | 1.00  | μA   |
| ZKA          | Dynamic Impedance                                                           | VKA = VREF, IKA = 1 to 100 mA, f ≥ 1.0 kHz       |                    |         | 0.15  | 0.50  |         | 0.15  | 0.50  |         | 0.15  | 0.50  | Ω    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

6. LM431SAI, LM431SBI, LM431SCI: -  $T_{A(min)} = -40^\circ\text{C}$ ,  $T_{A(max)} = +85^\circ\text{C}$

All other pins: -  $T_{A(min)} = -25^\circ\text{C}$ ,  $T_{A(max)} = +85^\circ\text{C}$

# LM431SA, LM431SB, LM431SC

## ELECTRICAL CHARACTERISTICS (Continued) (Notes 7 and 8, Values are at $T_A = 25^\circ\text{C}$ unless otherwise noted)


| Symbol                           | Parameter                                                               | Conditions                                                                                             | LM431SAI |       |       | LM431SBI |       |       | LM431SCI |       |       | Unit          |
|----------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------|-------|-------|----------|-------|-------|----------|-------|-------|---------------|
|                                  |                                                                         |                                                                                                        | Min.     | Typ.  | Max.  | Min.     | Typ.  | Max.  | Min.     | Typ.  | Max.  |               |
| $V_{REF}$                        | Reference Input Voltage                                                 | $V_{KA} = V_{REF}$ , $I_{KA} = 10\text{ mA}$                                                           | 2.450    | 2.500 | 2.550 | 2.470    | 2.495 | 2.520 | 2.482    | 2.495 | 2.508 | V             |
| $V_{REF(dev)}$                   | Deviation of Reference Input Voltage Over-Temperature                   | $V_{KA} = V_{REF}$ , $I_{KA} = 10\text{ mA}$ , $T_{MIN} \leq T_A \leq T_{MAX}$                         |          | 5     | 20    |          | 5     | 20    |          | 5     | 20    | mV            |
| $\Delta V_{REF} / \Delta V_{KA}$ | Ratio of Change in Reference Input Voltage to Change in Cathode Voltage | $I_{KA} = 10\text{ mA}$ , $\Delta V_{KA} = 10\text{ V} - V_{REF}$                                      |          | -1.0  | -2.7  |          | -1.0  | -2.7  |          | -1.0  | -2.7  | mV/V          |
|                                  |                                                                         | $\Delta V_{KA} = 36\text{ V} - 10\text{ V}$                                                            |          | -0.5  | -2.0  |          | -0.5  | -2.0  |          | -0.5  | -2.0  |               |
| $I_{REF}$                        | Reference Input Current                                                 | $I_{KA} = 10\text{ mA}$ , $R_1 = 10\text{ K}\Omega$ , $R_2 = \infty$                                   |          | 1.5   | 4.0   |          | 1.5   | 4.0   |          | 1.5   | 4.0   | $\mu\text{A}$ |
| $I_{REF(dev)}$                   | Deviation of Reference Input Current Over Full Temperature Range        | $I_{KA} = 10\text{ mA}$ , $R_1 = 10\text{ K}\Omega$ , $R_2 = \infty$ , $T_{MIN} \leq T_A \leq T_{MAX}$ |          | 0.8   | 2.0   |          | 0.8   | 2.0   |          | 0.8   | 2.0   | $\mu\text{A}$ |
| $I_{KA(MIN)}$                    | Minimum Cathode Current for Regulation                                  | $V_{KA} = V_{REF}$                                                                                     |          | 0.45  | 1.00  |          | 0.45  | 1.00  |          | 0.45  | 1.00  | mA            |
| $I_{KA(OFF)}$                    | Off-Stage Cathode Current                                               | $V_{KA} = 36\text{ V}$ , $V_{REF} = 0$                                                                 |          | 0.05  | 1.00  |          | 0.05  | 1.00  |          | 0.05  | 1.00  | $\mu\text{A}$ |
| ZKA                              | Dynamic Impedance                                                       | $V_{KA} = V_{REF}$ , $I_{KA} = 1\text{ to }100\text{ mA}$ , $f \geq 1.0\text{ kHz}$                    |          | 0.15  | 0.50  |          | 0.15  | 0.50  |          | 0.15  | 0.50  | $\Omega$      |

7. LM431SAI, LM431SBI, LM431SCI:  $-T_{A(min)} = -40^\circ\text{C}$ ,  $T_{A(max)} = +85^\circ\text{C}$

All other pins:  $-T_{A(min)} = -25^\circ\text{C}$ ,  $T_{A(max)} = +85^\circ\text{C}$

8. The deviation parameters  $V_{REF(dev)}$  and  $I_{REF(dev)}$  are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage,  $\alpha V_{REF}$ , is defined as:

$$|\alpha V_{REF}| \left( \frac{\text{ppm}}{^\circ\text{C}} \right) = \frac{\left( \frac{V_{REF(dev)}}{V_{REF(at\ 25^\circ\text{C})}} \right) \cdot 10^6}{T_{MAX} - T_{MIN}}$$

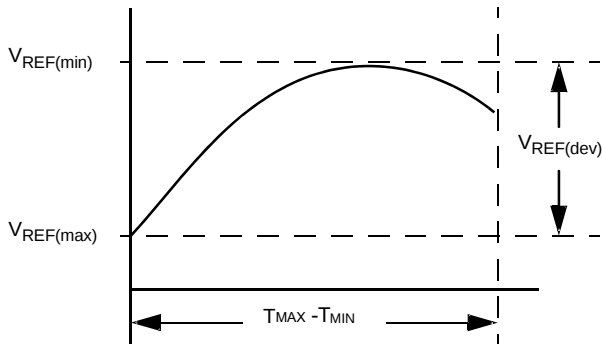

where  $T_{MAX} - T_{MIN}$  is the rated operating free-air temperature range of the device.

$\alpha V_{REF}$  can be positive or negative, depending on whether minimum  $V_{REF}$  or maximum  $V_{REF}$ , respectively, occurs at the lower temperature.

Example:

$V_{REF(dev)} = 4.5\text{ mV}$ ,  $V_{REF} = 2500\text{ mV}$  at  $25^\circ\text{C}$ ,

$T_{MAX} - T_{MIN} = 125^\circ\text{C}$  for LM431SAI.

$$|\alpha V_{REF}| = \frac{\left( \frac{4.5\text{ mV}}{2500\text{ mV}} \right) \cdot 10^6}{125^\circ\text{C}} = 14.4\text{ ppm}/^\circ\text{C}$$

Because minimum  $V_{REF}$  occurs at the lower temperature, the coefficient is positive.

# LM431SA, LM431SB, LM431SC

## TEST CIRCUITS




Figure 2. Test Circuit for  $V_{KA} = V_{REF}$

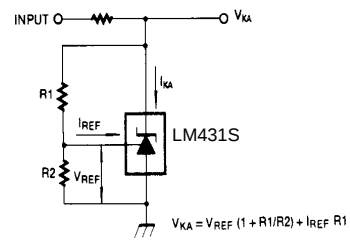


Figure 3. Test Circuit for  $V_{KA} \geq V_{REF}$




Figure 4. Test Circuit for  $I_{KA(OFF)}$

TYPICAL APPLICATIONS




Figure 5. Shunt Regulator

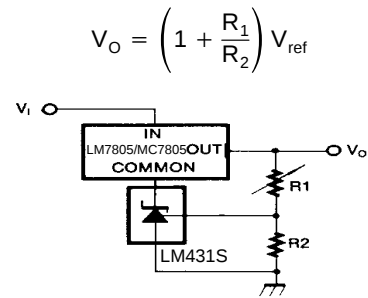


Figure 6. Output Control for Three-Terminal Fixed Regulator




Figure 7. High Current Shunt Regulator




Figure 8. Current Limit or Current Source




Figure 9. Constant-Current Sink

TYPICAL PERFORMANCE CHARACTERISTICS

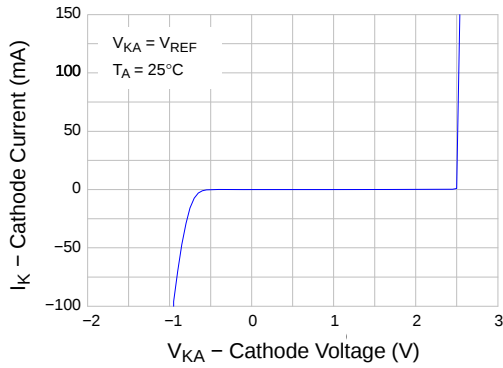


Figure 10. Cathode Current vs. Cathode Voltage

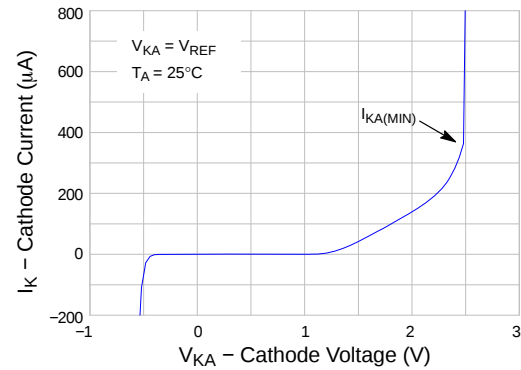


Figure 11. Cathode Current vs. Cathode Voltage

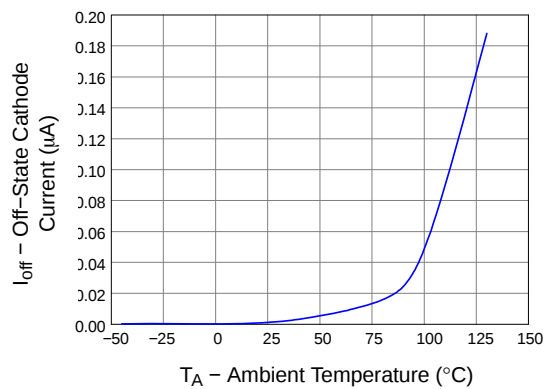


Figure 12. OFF-State Cathode Current vs. Ambient Temperature

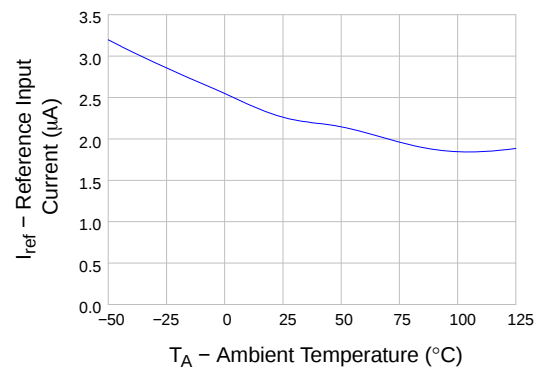


Figure 13. Reference Input Current vs. Ambient Temperature

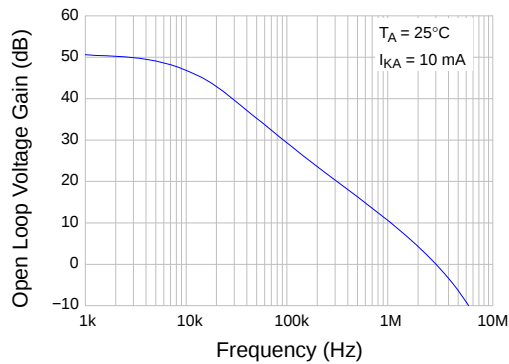


Figure 14. Frequency vs. Small Signal Voltage Amplification



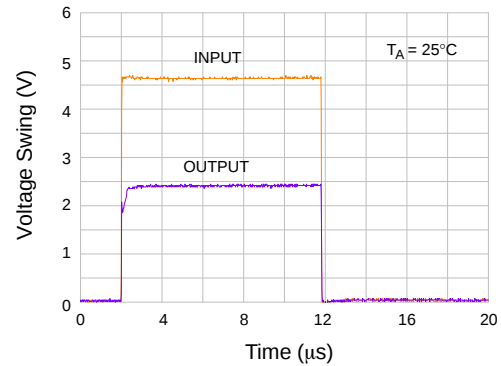


Figure 15. Pulse Response


# LM431SA, LM431SB, LM431SC

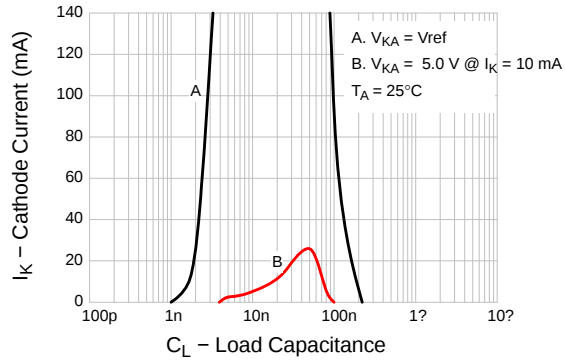


**Figure 16. Stability Boundary Conditions**

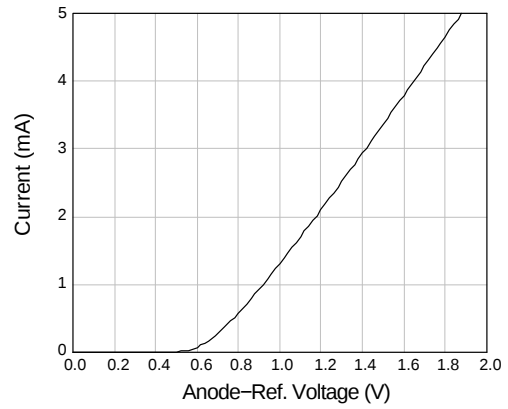

**Figure 17. Anode-Reference Diode Curve**

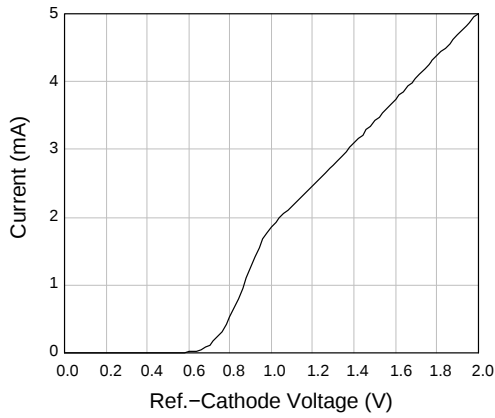

**Figure 18. Reference-Cathode Diode Curve**



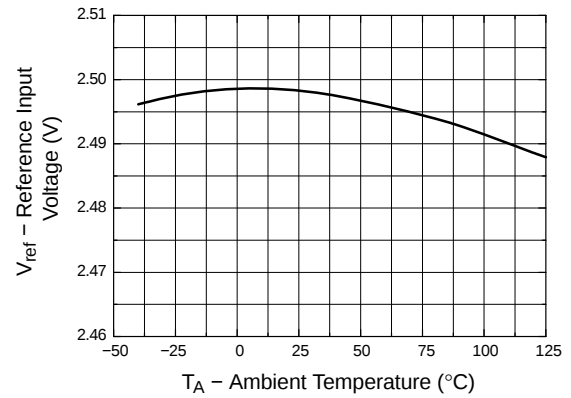


**Figure 19. Reference Input Voltage vs. Ambient Temperature**

# LM431SA, LM431SB, LM431SC

## PACKAGE DIMENSIONS

SOT-23  
CASE 318BM  
ISSUE O

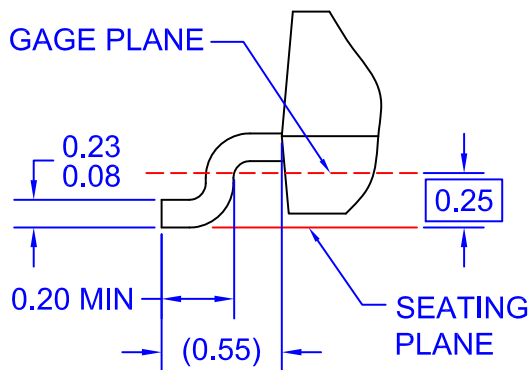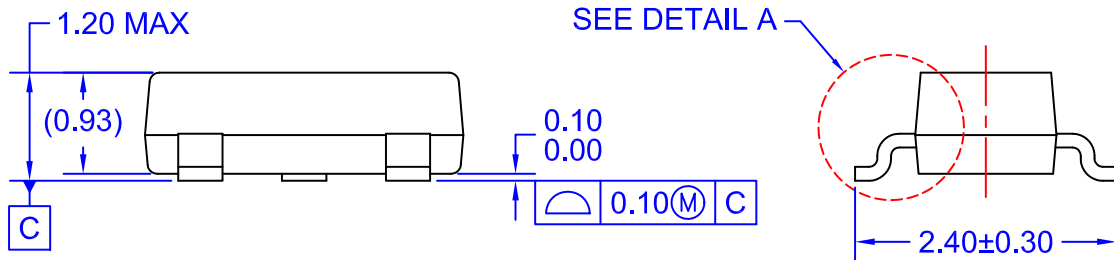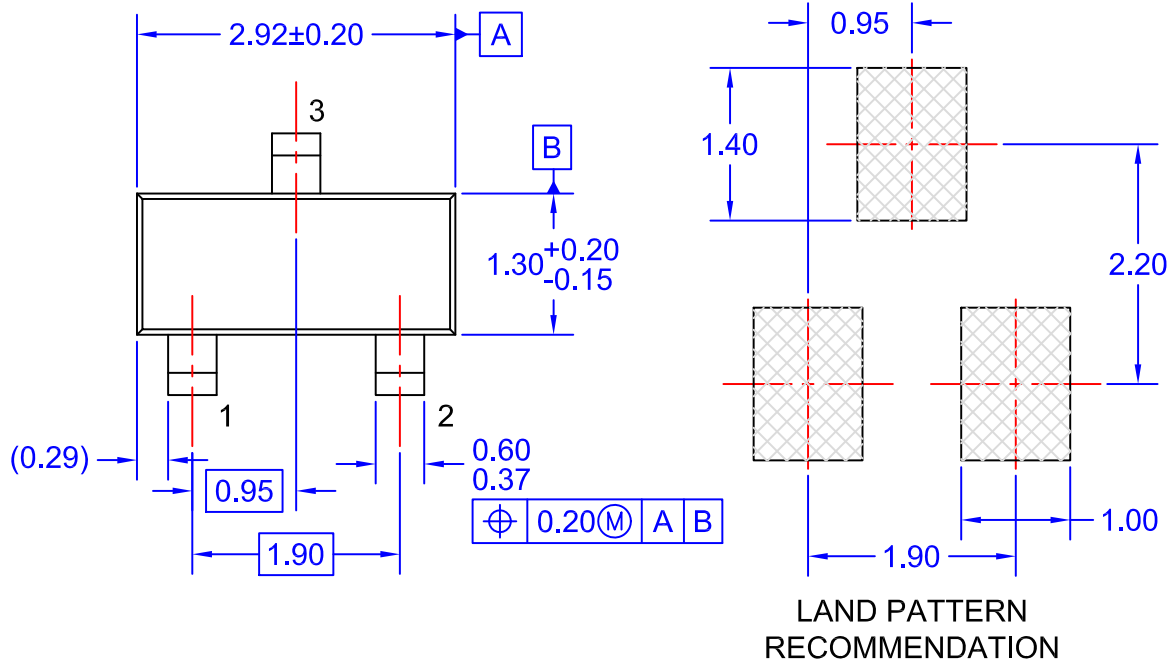

DETAIL A  
SCALE: 2X

NOTES: UNLESS OTHERWISE SPECIFIED


- A) REFERENCE JEDEC REGISTRATION TO-236, VARIATION AB, ISSUE H.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE INCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.
- D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M - 2009.



# LM431SA, LM431SB, LM431SC

## PACKAGE DIMENSIONS

SOT-89 3 LEAD  
CASE 528AH  
ISSUE O

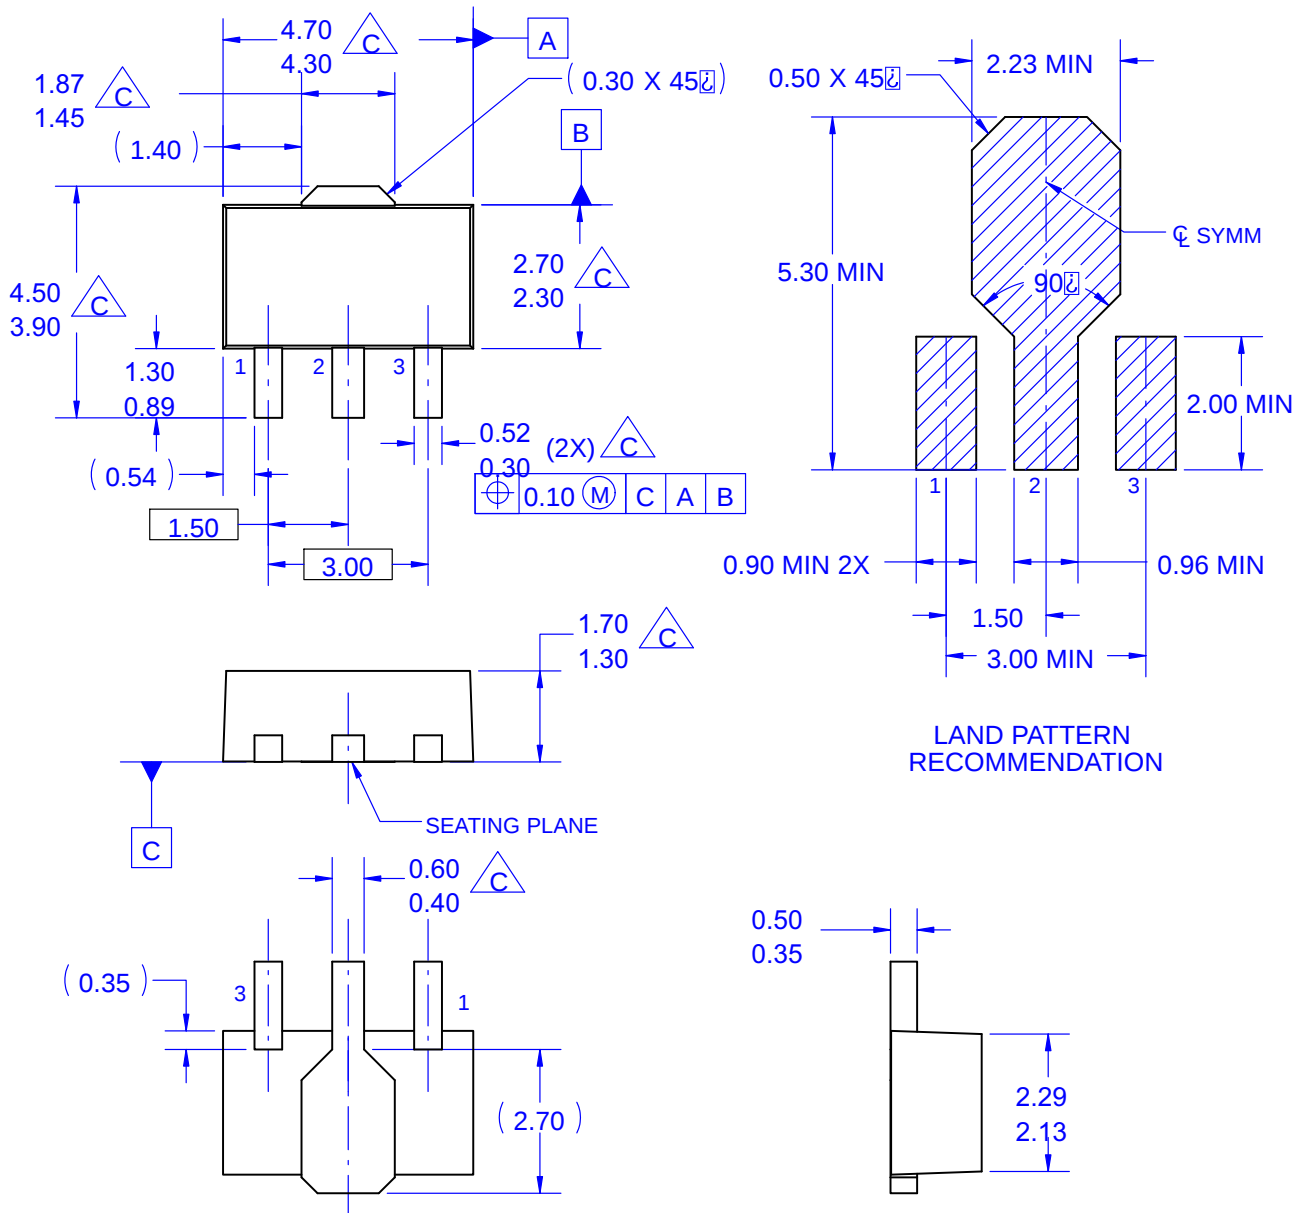

NOTES: UNLESS OTHERWISE SPECIFIED.

A. REFERENCE TO JEDEC TO-243 VARIATION AA.

B. ALL DIMENSIONS ARE IN MILLIMETERS.

C. DOES NOT COMPLY JEDEC STANDARD VALUE.

D. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSION.

E. DIMENSION AND TOLERANCE AS PER ASME Y14.5-1994.

# LM431SA, LM431SB, LM431SC

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative