National Semiconductor

June 3, 2010

# LMH6629

# Ultra-Low Noise, High Speed Operational Amplifier

## General Description

The LMH6629 is a high speed, ultra low-noise amplifier designed for applications requiring wide bandwidth with high gain and low noise such as in communication, test and measurement, optical and ultrasound systems.

The LMH6629 operates on 2.7 to 5.5V supply with an input common mode range that extends below ground and outputs that swing to within 0.8V of the rails for ease of use in single supply applications. The LMH6629 has user-selectable internal compensation for minimum gains of 4 or 10 controlled by pulling the COMP pin low or high, thereby avoiding the need for external compensation capacitors required in competitive devices.

The low-input noise (0.69nV/√Hz and 2.6 pA/√Hz), low distortion (HD2/ HD3 = −90 dBc/ −94 dBc) and ultra-low DC errors (780 µV $V_{OS}$ Max @ 25°C, ±0.45 µV/°C drift) allow precision operation in both AC- and DC-coupled applications.

The LMH6629 is fabricated in National Semiconductor's proprietary SiGe process and is available in a 3mm x 3mm, 8 pin LLP package.

## Features

Specified for $V_S$ = 5V, $R_L$ = 100Ω, $A_V$ = 10V/V

| | |
|---|---|
| ■ −3dB bandwidth | 900MHz |
| ■ Input voltage noise | 0.69 nV/√Hz |
| ■ Input offset voltage max. @ 25°C | ±780 µV |
| ■ Slew rate | 1600 V/ µs |
| ■ HD2 @ f = 1MHz, 2$V_{PP}$ | −90 dBc |
| ■ HD3 @ f = 1MHz, 2$V_{PP}$ | −94 dBc |
| ■ Supply voltage range | 2.7V to 5.5V |
| ■ Typical supply current | 15.5 mA |
| ■ Selectable min. gain | ≥4 or ≥10 |
| ■ Package | LLP-8 |

## Applications

- Instrumentation Amplifiers
- Ultrasound Pre-amps
- Wide-band Active Filters
- Opto-electronics
- Medical imaging systems
- Base-station Amplifiers
- Trans-impedance amplifier

## Typical Application Circuit

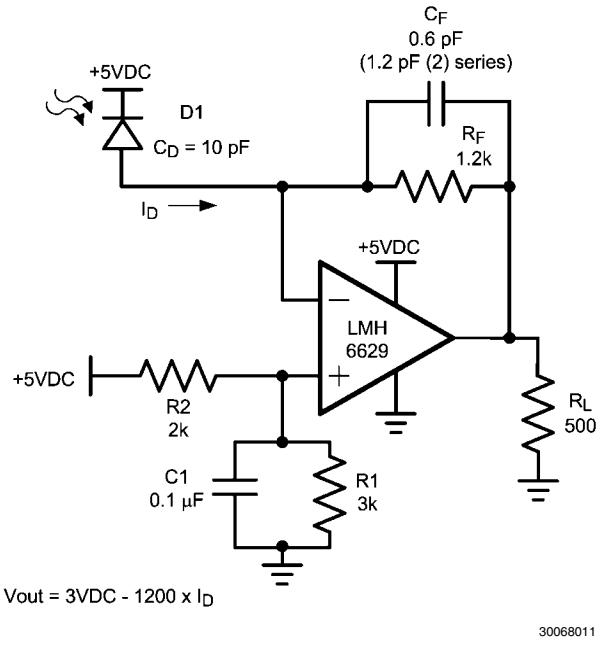


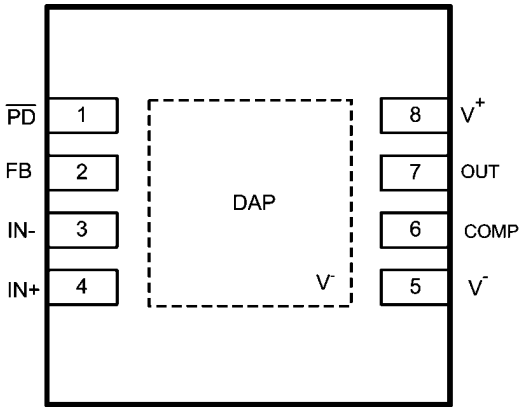

**FIGURE 1. Transimpedance Amplifier**

© 2010 National Semiconductor Corporation 

## Ordering Information

| Package | Part Number | Package Marking | Transport Media | NSC Drawing |
|---|---|---|---|---|
| LLP-8 | LMH6629SD | L6629 | 1k Units Tape and Reel | SDA08A |
| | LMH6629SDE | | 250 Units Tape and Reel | |
| | LMH6629SDX | | 4.5k Units Tape and Reel | |

## Connection Diagram




**8-Pin LLP SDA088AD (Top View)**

## Absolute Maximum Ratings (*Note 1*)

**If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.**

| | |
|---|---|
| ESD Tolerance (*Note 4*) | |
| Human Body Model | 2kV |
| Machine Model | 200V |
| Charge-Device Model | 750V |
| Positive Supply Voltage | −0.5 to 6.0V |
| Differential Input Voltage | 3V |
| Analog Input Voltage Range | −0.5 to $V_S$ |
| Digital Input Voltage | −0.5 to $V_S$ |
| Junction Temperature | +150°C |
| Storage Temperature Range | −65°C to +150°C |
| Soldering Information | |
| See Product Folder at www.national.com and http://www.national.com/ms/MS/MS-SOLDERING.pdf | |

## Operating Ratings (*Note 1*)

| | |
|---|---|
| Supply Voltage (V+ - V− | 2.7V to 5.5V |
| Operating Temperature Range | −40°C to +125°C |
| Package | ($\theta_{JA}$) |
| LLP-8 | 71°C/W |

## 5V Electrical Characteristics

The following specifications apply for single supply with $V_S$ = 5V, $R_L$ = 100Ω terminated to 2.5V, gain = 10V/V, $V_O$ = $2V_{PP}$, $V_{CM}$ = $V_S$/2, COMP Pin = HI, unless otherwise noted. **Boldface** limits apply at the temperature extremes. (*Note 2*).

| Symbol | Parameter | Conditions | Min (*Note 6*) | Typ (*Note 6*) | Max (*Note 6*) | Units |
|---|---|---|---|---|---|---|
| **DYNAMIC PERFORMANCE** | | | | | | |
| SSBW | Small signal −3dB bandwidth | $V_O$ = 200 $mV_{PP}$ | | 900 | | MHz |
| | | COMP Pin = LO, $A_V$= 4, $V_O$ = 200 $mV_{PP}$ | | 800 | | |
| LSBW | Large signal −3dB bandwidth | $V_O$ = $2V_{PP}$ | | 380 | | MHz |
| | | COMP Pin = LO, $A_V$= 4, $V_O$ = $2V_{PP}$ | | 190 | | |
| | 0.1 dB bandwidth | $A_V$= 10, $V_O$ = 200 $mV_{PP}$ | | 330 | | MHz |
| | | COMP Pin = LO, $A_V$= 4, $V_O$ = 200 $mV_{PP}$ | | 95 | | |
| SR | Slew rate | $A_V$= 10, 2V step | | 1600 | | V/µs |
| | | $A_V$= 4, 2V step, COMP Pin = LO | | 530 | | |
| $t_r/t_f$ | Rise/fall time | $A_V$= 10, 2V step, 10% to 90% | | 0.9 | | ns |
| | | $A_V$= 4, 2V step, 10% to 90%, COMP Pin = LO, (Slew Rate Limited) | | 2.8 | | |
| $T_s$ | Settling time | $A_V$= 10, 1V step, ±0.1% | | 42 | | |
| | Overload Recovery | $V_{IN}$ = $1V_{PP}$ | | 2 | | |
| **NOISE AND DISTORTION** | | | | | | |
| HD2 | 2nd order distortion | fc = 1MHz, $V_O$ = $2V_{PP}$ | | −90 | | dBc |
| | | COMP Pin = LO, $A_V$= 4, fc = 1 MHz, $V_O$ = $2V_{PP}$ | | −88 | | |
| | | fc = 10 MHz, $V_O$ = $2V_{PP}$ | | −70 | | |
| | | COMP Pin = LO, fc = 10 MHz, $A_V$= 4V, $V_O$ = $2V_{PP}$ | | −65 | | |
| HD3 | 3rd order distortion | fc = 1MHz, $V_O$ = $2V_{PP}$ | | −94 | | dBc |
| | | COMP Pin = LO, $A_V$= 4, fc = 1MHz, $V_O$ = $2V_{PP}$ | | −87 | | |
| | | fc = 10 MHz, $V_O$ = $2V_{PP}$ | | −82 | | |
| | | COMP Pin = LO, fc = 10 MHz, $V_O$ = $2V_{PP}$ | | −75 | | |
| OIP3 | Two-tone 3rd order intercept point | fc = 25 MHz, $V_O$ = 2 $V_{PP}$ composite | | 31 | | dBm |
| | | fc = 75 MHz, $V_O$ = $2V_{PP}$ composite | | 27 | | |
| $e_n$ | Noise Voltage | Input referred f > 1MHz | | 0.69 | | nV/√Hz |
| $i_n$ | Noise current | | | 2.6 | | pA/√Hz |

| Symbol | Parameter | Conditions | Min (*Note 6*) | Typ (*Note 6*) | Max (*Note 6*) | Units |
|---|---|---|---|---|---|---|
| NF | Noise Figure | $R_S = R_T = 50\Omega$ | | 8.0 | | dB |
| **ANALOG I/O** | | | | | | |
| CMVR | Input voltage range | CMRR > 70 dB | −0.30 | | 3.8 | V |
| $V_O$ | Output voltage range | $R_L = 100\Omega$ to $V_S/2$ | 0.89<br>**0.95** | 0.82 to 4.19 | 4.0<br>**3.9** | V |
| | | No Load | 0.76<br>**0.85** | 0.72 to 4.28 | 4.1<br>**4.0** | |
| $I_{OUT}$ | Linear output current | $V_O$ = 2.5V (*Note 3*) | | 250 | | mA |
| $V_{OS}$ | Input offset voltage | | | ±150 | ±780<br>**±800** | µV |
| $TcV_{OS}$ | Input offset voltage temperature drift | (*Note 7*) | | ±0.45 | | µV/°C |
| $I_{BI}$ | Input bias current | (*Note 6*) | | −15 | −23<br>**−37** | µA |
| $I_{OS}$ | Input offset current | | | ±0.1 | ±1.8<br>**±3.0** | µA |
| $T_CI_{OS}$ | Input offset voltage temperature drift | (*Note 7*) | | ±2.8 | | nA/°C |
| $C_{CM}$ | Input capacitance | Common Mode | | 1.7 | | pF |
| $R_{CM}$ | Input resistance | Common Mode | | 450 | | kΩ |
| **MISCELLANEOUS PARAMETERS** | | | | | | |
| CMRR | Common mode rejection ratio | $V_{CM}$ from 0V to 3.7V | 82<br>**70** | 87 | | dB |
| PSRR | Power supply rejection ratio | | 81<br>**78** | 83 | | |
| $A_{VOL}$ | Open loop gain | | 74<br>**72** | 78 | | |
| **DIGITAL INPUTS/TIMING** | | | | | | |
| $V_{IL}$ | Logic low-voltage threshold | $\overline{PD}$ and COMP pins | | | 0.8 | V |
| $V_{IH}$ | Logic high-voltage threshold | $\overline{PD}$ and COMP pins | 2.5 | | | |
| $I_{IL}$ | Logic low-bias current | $\overline{PD}$ and COMP pins = 0.8V (*Note 6*) | −23<br>**−19** | −28 | −34<br>**−38** | µA |
| $I_{IH}$ | Logic high-bias current | $\overline{PD}$ and COMP pins = 2.5V (*Note 6*) | −16<br>**−14** | −22 | −27<br>**−29** | |
| $T_{en}$ | Enable time | | | 75 | | ns |
| $T_{dis}$ | Disable time | | | 80 | | |
| **POWER REQUIREMENTS** | | | | | | |
| $I_S$ | Supply Current | No Load, Normal Operation ($\overline{PD}$ Pin = HI or open) | | 15.5 | 16.7<br>**18.2** | mA |
| | | No Load, Shutdown ($\overline{PD}$ Pin =LO) | | 1.1 | 1.85<br>**2.0** | |

## 3.3V Electrical Characteristics

The following specifications apply for single supply with $V_S$ = 3.3V, $R_L$ = 100Ω terminated to 1.65V, gain = 10V/V, $V_O$ = $1V_{PP}$, $V_{CM}$ = $V_S$/2, COMP Pin = HI, unless otherwise noted. **Boldface** limits apply at the temperature extremes. (*Note 2*)

| Symbol | Parameter | Conditions | Min (*Note 5*) | Typ (*Note 5*) | Max (*Note 5*) | Units |
|---|---|---|---|---|---|---|
| **DYNAMIC PERFORMANCE** | | | | | | |
| SSBW | Small signal –3dB bandwidth | $V_O$ = 200 $mV_{PP}$ | | 820 | | MHz |
| | | COMP Pin = LO, $A_V$= 4, $V_O$ = 200 $mV_{PP}$ | | 730 | | |
| LSBW | Large signal –3dB bandwidth | $V_O$ = $1V_{PP}$ | | 540 | | MHz |
| | | COMP Pin = LO, $A_V$= 4, $V_O$ = $1V_{PP}$ | | 320 | | |
| | 0.1 dB bandwidth | $A_V$= 10, $V_O$ = 200 $mV_{PP}$ | | 330 | | MHz |
| | | COMP Pin = LO, $A_V$= 4, $V_O$ = 200 $mV_{PP}$ | | 85 | | |
| SR | Slew rate | $A_V$= 10, 1.3V step | | 1100 | | V/µs |
| | | COMP Pin = LO, $A_V$= 4, 1.3V step | | 500 | | |
| $t_r/t_f$ | Rise/fall time | $A_V$= 10, 1V step, 10% to 90% | | 0.7 | | ns |
| | | COMP Pin = LO, $A_V$= 4, 1V step, 10% to 90% (Slew Rate Limited) | | 1.3 | | |
| $T_s$ | Settling time | $A_V$= 10, 1V step, ±0.1% | | 70 | | |
| | Overload Recovery | $V_{IN}$ = $1V_{PP}$ | | 2 | | |
| **NOISE AND DISTORTION** | | | | | | |
| HD2 | 2nd order distortion | fc = 1MHz, $V_O$ = $1V_{PP}$ | | –82 | | dBc |
| | | COMP Pin = LO, $A_V$= 4, fc = 1MHz, $V_O$ = $1V_{PP}$ | | -88 | | |
| | | fc = 10 MHz, $V_O$ = $1V_{PP}$ | | -67 | | |
| | | COMP Pin = LO, fc = 10 MHz, $A_V$= 4V, $V_O$ = $1V_{PP}$ | | -74 | | |
| HD3 | 3rd order distortion | fc = 1MHz, $V_O$ = $1V_{PP}$ | | -94 | | dBc |
| | | COMP Pin = LO, $A_V$= 4, fc = 1MHz, $V_O$ = $1V_{PP}$ | | -112 | | |
| | | fc = 10 MHz, $V_O$ = $1V_{PP}$ | | -79 | | |
| | | COMP pin = LO, fc = 10 MHz, $V_O$ = $1V_{PP}$ | | –96 | | |
| OIP3 | Two-tone 3rd Order Intercept Point | fc = 25 MHz, $V_O$ = $1V_{PP}$ composite | | 30 | | dBm |
| | | fc = 75 MHz, $V_O$ = $1V_{PP}$ composite | | 26 | | |
| $e_n$ | Noise voltage | Input referred, f > 1MHz | | 0.69 | | nV/√HZ |
| $i_n$ | Noise current | | | 2.6 | | pA/√HZ |
| NF | Noise figure | $R_S$ = $R_T$ = 50Ω | | 8.0 | | dB |
| **ANALOG I/O** | | | | | | |
| CMVR | Input voltage range | CMRR > 70 dB | –0.30 | | 2.1 | V |
| $V_O$ | Output voltage range | $R_L$ = 100Ω to $V_S$/2 | 0.90<br>**0.95** | 0.79 to 2.50 | 2.4<br>**2.3** | V |
| | | No load | 0.76<br>**0.80** | 0.70 to 2.60 | 2.5<br>**2.4** | |
| $I_{OUT}$ | Linear output current | $V_O$ = 1.65V (*Note 3*) | | 230 | | mA |
| $V_{OS}$ | Input Offset Voltage | | | ±150 | ±680<br>**±700** | µV |
| $TcV_{OS}$ | Input offset voltage temperature drift | (*Note 7*) | | ±1 | | µV/°C |

| Symbol | Parameter | Conditions | Min (Note 5) | Typ (Note 5) | Max (Note 5) | Units |
|---|---|---|---|---|---|---|
| $I_{BI}$ | Input Bias Current | (Note 6) | | −15 | −23<br>**−35** | µA |
| $I_{OS}$ | Input Offset Current | | | ±0.13 | ±1.8<br>**±3.0** | µA |
| $T_C I_{OS}$ | Input offset voltage temperature drift | (Note 7) | | ±3.2 | | nA/°C |
| $C_{CM}$ | Input Capacitance | Common Mode | | 1.7 | | pF |
| $R_{CM}$ | Input Resistance | Common Mode | | 1 | | MΩ |
| **MISCELLANEOUS PARAMETERS** | | | | | | |
| CMRR | Common Mode Rejection Ratio | $V_{CM}$ from 0V to 2.0V | 84<br>**81** | 87 | | dB |
| PSRR | Power supply rejection ratio | | 82<br>**79** | 84 | | |
| $A_{VOL}$ | Open Loop Gain | | 78<br>**73** | 79 | | |
| **DIGITAL INPUTS/TIMING** | | | | | | |
| $V_{IL}$ | Logic low-voltage threshold | $\overline{PD}$ and COMP pins | | | 0.8 | V |
| $V_{IH}$ | Logic high-voltage threshold | | 2.0 | | | |
| $I_{IL}$ | Logic low-bias current | $\overline{PD}$ and COMP pins = 0.8V (Note 6) | -17<br>**−14** | −23 | −28<br>**−32** | µA |
| $I_{IH}$ | Logic high-bias current | $\overline{PD}$ and COMP pins = 2.0V (Note 6) | −16<br>**−13** | −22 | −27<br>**−31** | |
| $T_{en}$ | Enable time | | | 75 | | ns |
| $T_{dis}$ | Disable time | | | 80 | | |
| **POWER REQUIREMENTS** | | | | | | |
| $I_S$ | Supply Current | No Load, Normal Operation ($\overline{PD}$ Pin = HI or open) | | 13.7 | 14.9<br>**16.0** | mA |
| | | No Load, Shutdown ($\overline{PD}$ Pin = LO) | | 0.89 | 1.4<br>**1.5** | |

**Note 1:** Absolute maximum ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

**Note 2:** Electrical table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that $T_J = T_A$. No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where $T_J > T_A$.

**Note 3:** The maximum continuous output current ($I_{OUT}$) is determined by device power dissipation limitations. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C

**Note 4:** Human Body Model, applicable std. JESD22-A114C. Machine Model, applicable std. JESD22-A115-A. Field Induced Charge Device Model, applicable std. JESD22-C101-C.

**Note 5:** Typical numbers are the most likely parametric norm. Bold numbers refer to over-temperature limits.

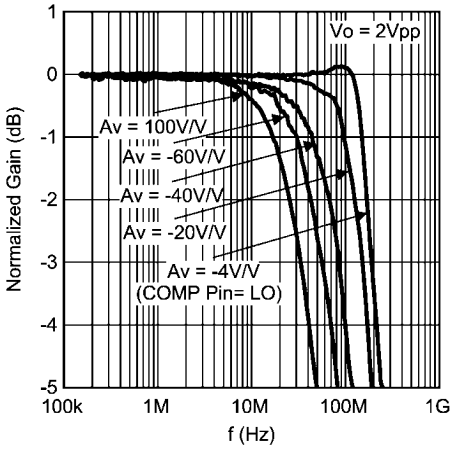
**Note 6:** Negative input current implies current flowing out of the device.

**Note 7:** Drift determined by dividing the change in parameter at temperature extremes by the total temperature change.

## Typical Performance Characteristics

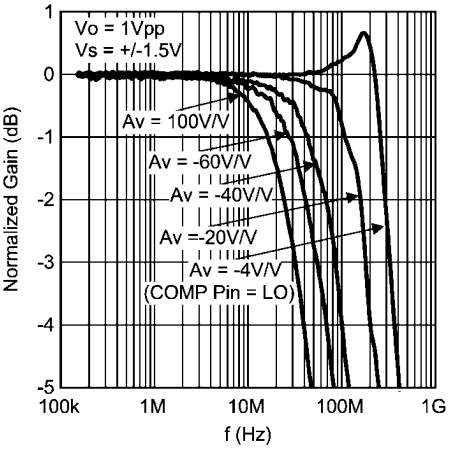
Unless otherwise specified, $V_S$ = ±2.5V, $R_f$ = 240Ω, $R_L$ = 100Ω, $V_{OUT}$ = $2V_{PP}$, COMP pin = HI, $A_V$ = +10 V/V.

**Inverting Frequency Response**



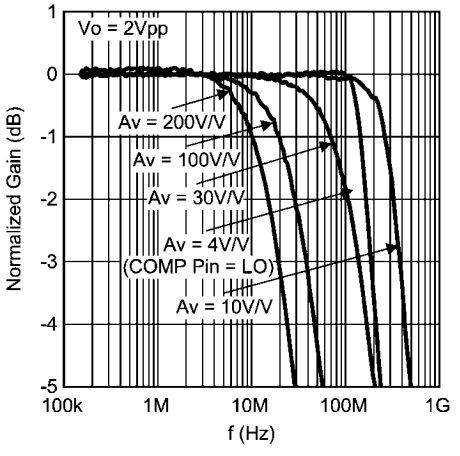

30068003

**Inverting Frequency Response**



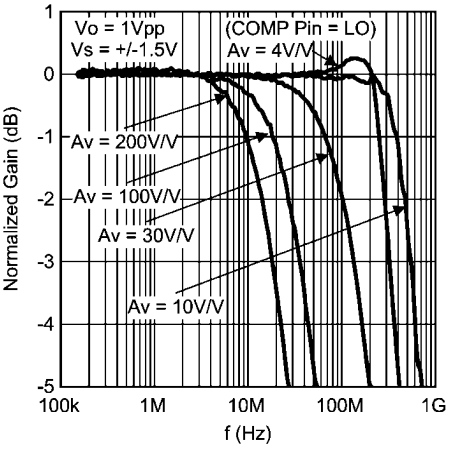

30068004

**Non-Inverting Frequency Response**



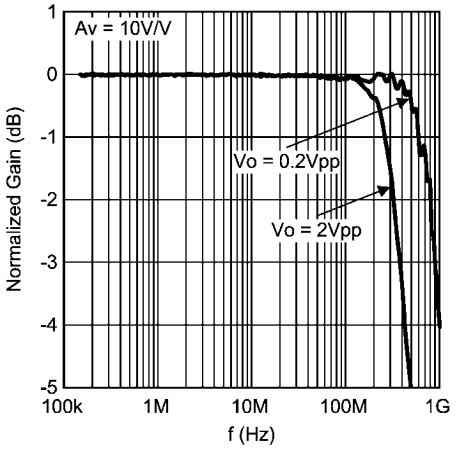

30068005

**Non-Inverting Frequency Response**



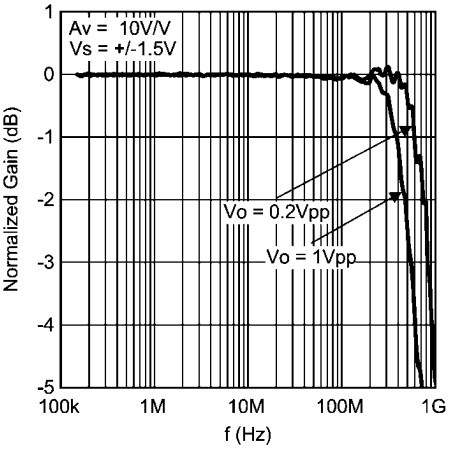

30068006

**Non-Inverting Frequency Response with Varying $V_O$**



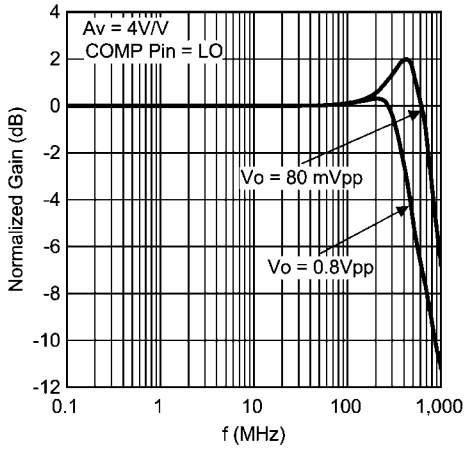

30068007

**Non-Inverting Frequency Response with Varying $V_O$**



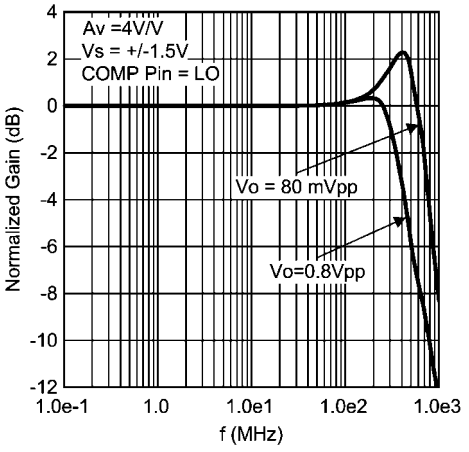

30068008

**Non-Inverting Frequency Response with Varying $V_O$**



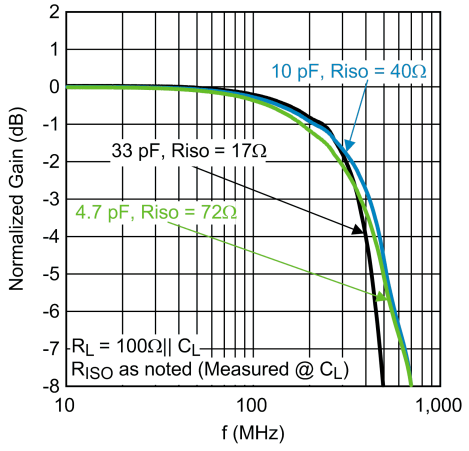

30068013

**Non-Inverting Frequency Response with Varying $V_O$**



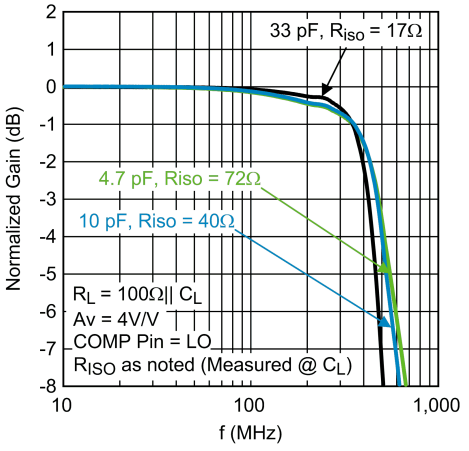

30068014

**Frequency Response with Cap. Loading**



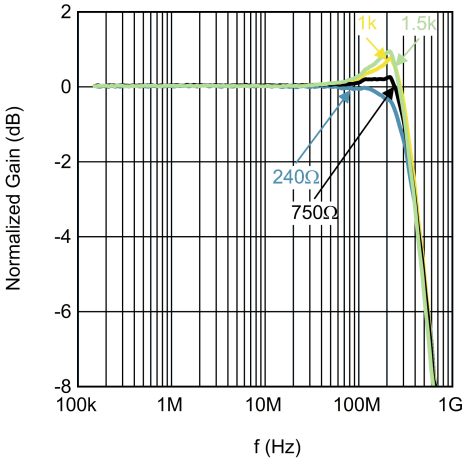

30068015

**Frequency Response Cap. Loading**



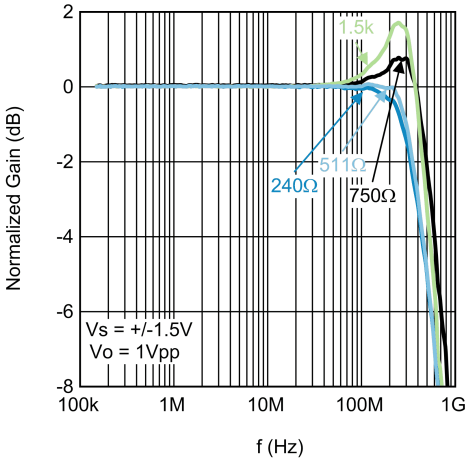

30068016

**Frequency Response vs. $R_f$**



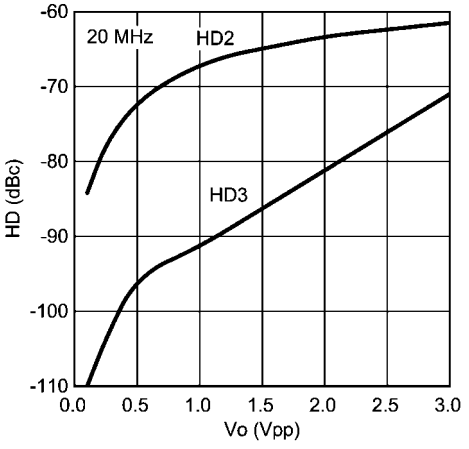

30068017

**Frequency Response vs. $R_f$**



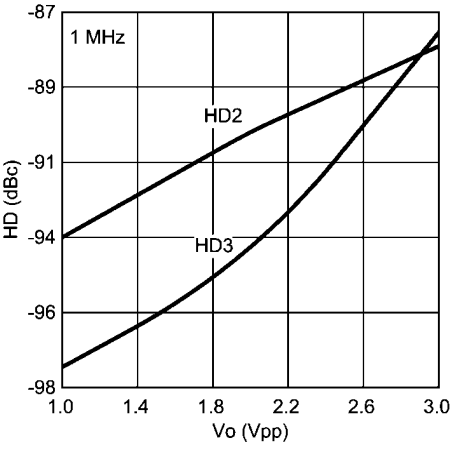

30068038

**Distortion vs. Swing**



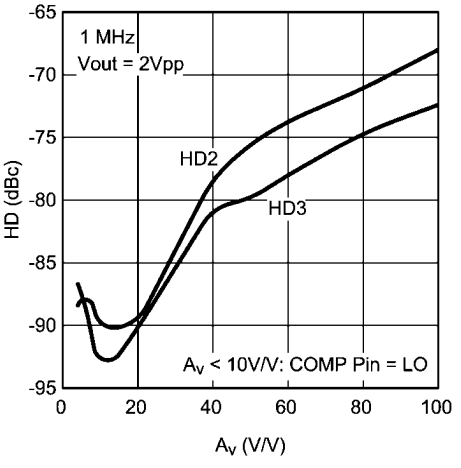

30068043

**Distortion vs. Swing**



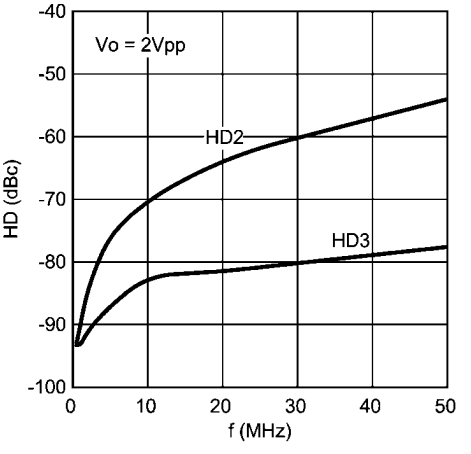

30068077

**Distortion vs. Gain**



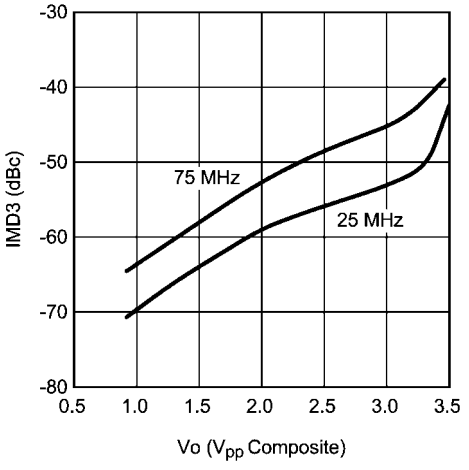

30068078

**Distortion vs. Frequency**



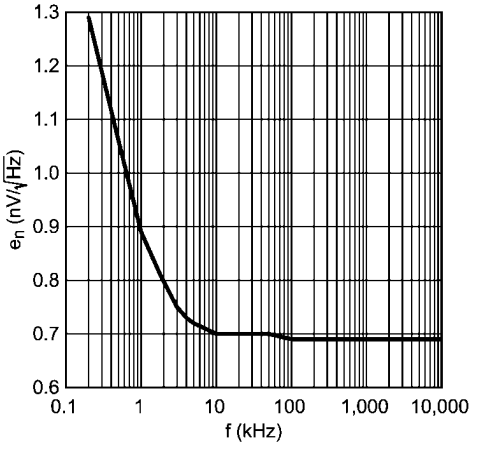

30068044

**3rd Order Intermodulation Distortion vs. Output Voltage**



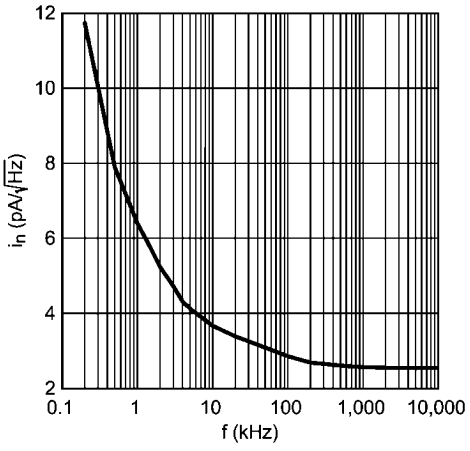

30068096

**Input Noise Voltage vs. Frequency**



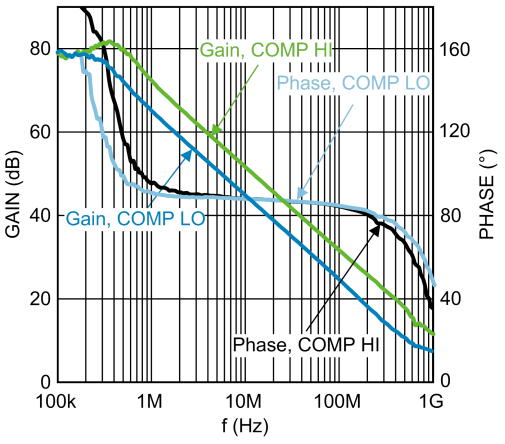

30068062

**Input Noise Current vs. Frequency**



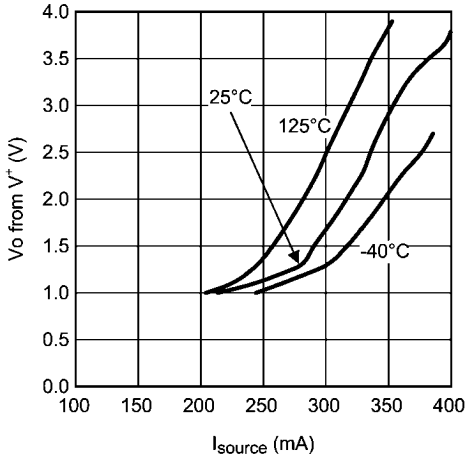

30068063

**Open Loop Gain/Phase Response**



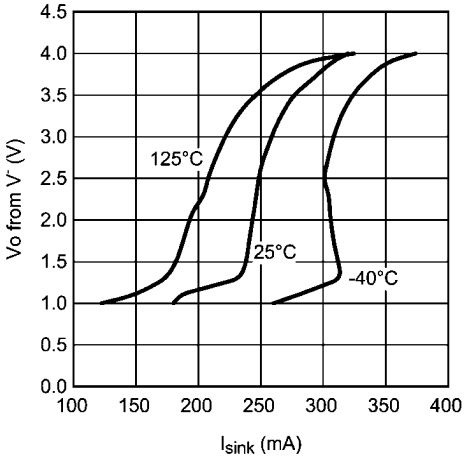

30068060

**Output Source Current**



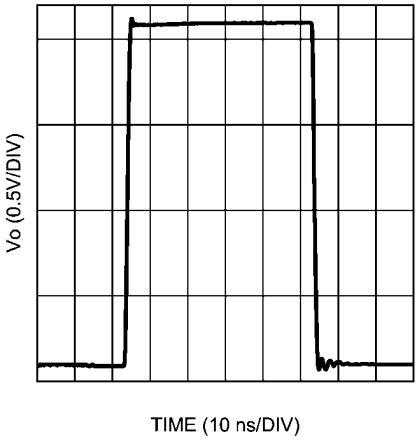

30068057

**Output Sink Current**



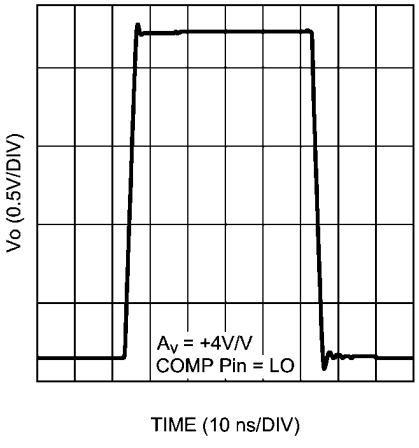

30068058

**Large Signal Step Response**



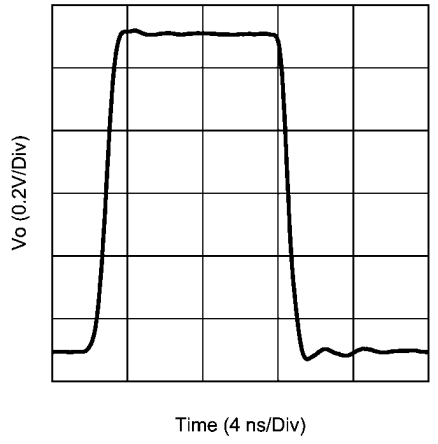

30068073

**Large Signal Step Response**



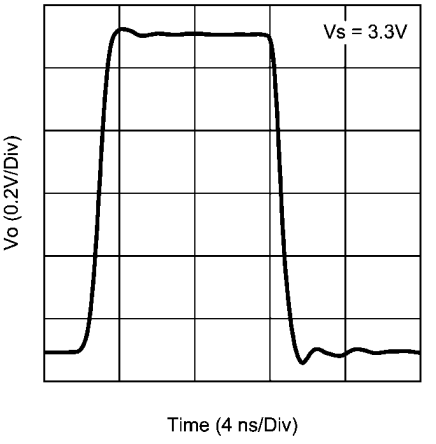

30068074

**Large Signal Step Response**



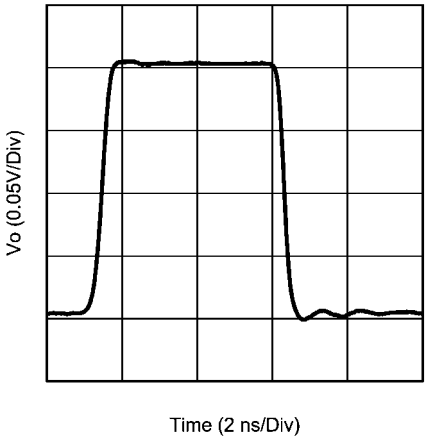

30068064

**Large Signal Step Response**



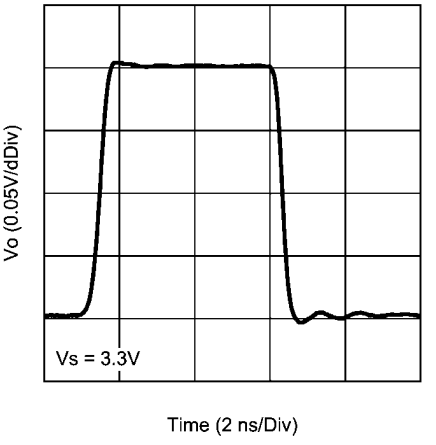

30068046

**Small Signal Step Response**



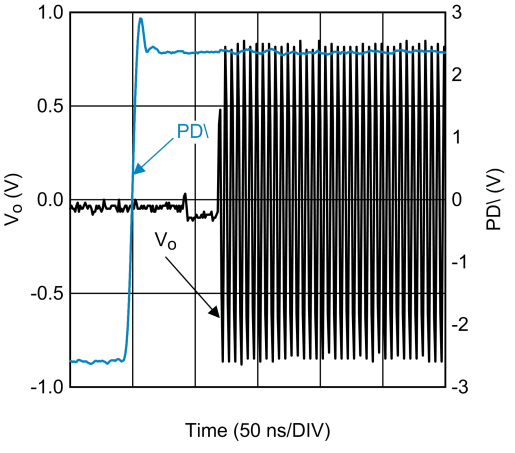

30068075

**Small Signal Step Response**



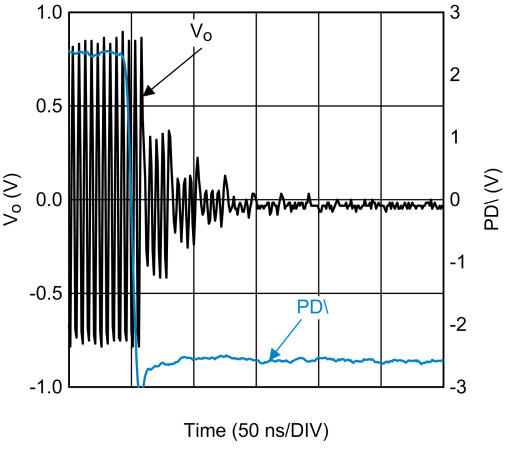

30068076

**Turn-On Waveform**



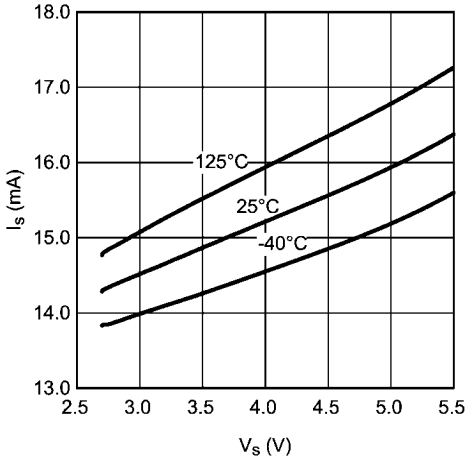

30068025

**Turn-Off Waveform**



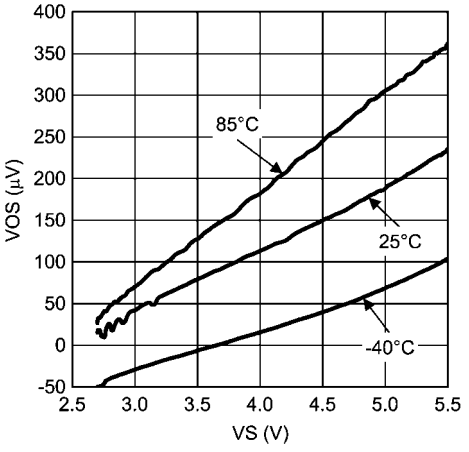

30068024

**Supply Current vs. Supply Voltage**



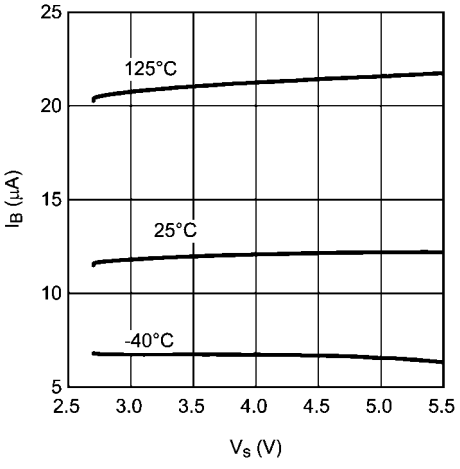

30068090

**Offset Voltage vs. Supply Voltage (Typical Unit)**



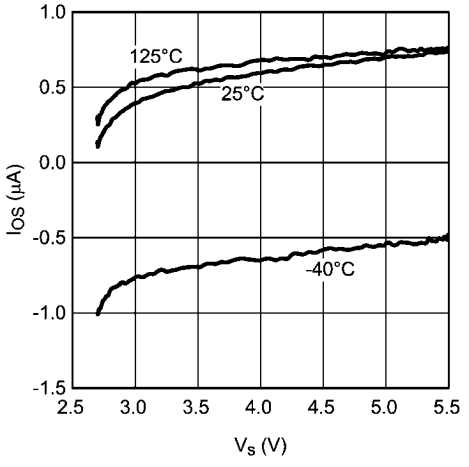

30068067

**Input Bias Current vs. Supply Voltage (Typical Unit)**




30068091

**Input Offset Current vs. Supply Voltage (Typical Unit)**




30068053

# Application Section

## INTRODUCTION

The LMH6629 is a very wide gain bandwidth, ultra low-noise voltage feedback operational amplifier. The excellent noise and bandwidth enables applications such as medical diagnostic ultrasound, magnetic tape & disk storage and fiberoptics to achieve maximum high frequency signal-to-noise ratios. The following discussion will enable the proper selection of external components to achieve optimum system performance.

The LMH6629 has some additional features to allow maximum performance. As shown in *Figure 2* there are provisions for low power shut down and two internal compensation settings, which are further discussed below. Also provided is a feedback (FB) pin which allows the placement of the feedback resistor directly adjacent to the inverting input (IN-) pin. This pin simplifies board layout and minimizes the possibility of unwanted interaction between the feedback path and other circuit elements.

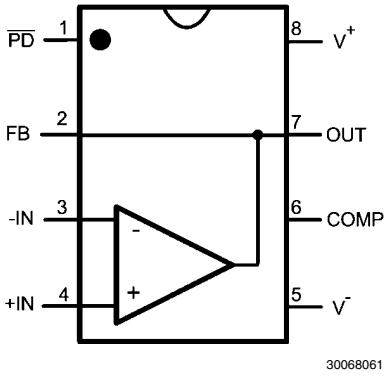



**FIGURE 2. 8-Pin LLP Pinout Diagram**

The LLP-8 package requires the bottom-side Die Attach Paddle (DAP) to be soldered to the circuit board for proper thermal dissipation and to get the thermal resistance number specified. The DAP is tied to the V- potential within the LMH6629 package. Thus, the circuit board copper area devoted to DAP heatsinking connection should be at the V- potential as well. Please refer to the package drawing for the recommended land pattern and recommended DAP connection dimensions.

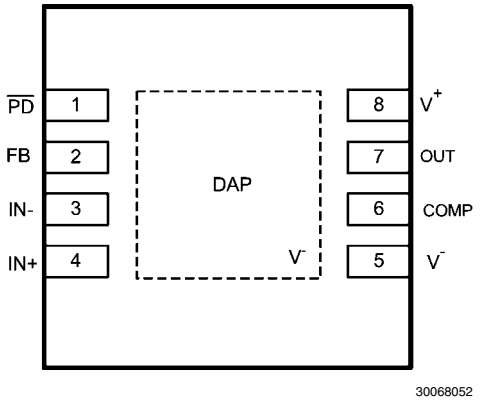



**FIGURE 3. 8-Pin LLP SDA088AD (Top View)**

## CONTROL PINS

The LMH6629 has two digital control pins; $\overline{PD}$ and COMP pins. The $\overline{PD}$ pin, used for powerdown, floats high (on) when not driven. When the $\overline{PD}$ pin is pulled low, the amplifier is disabled and the amplifier output stage goes into a high impedance state so the feedback and gain set resistors determine the output impedance of the circuit. The other control pin, the COMP pin, allows control of the internal compensation and defaults to the lower gain mode or logic 0.

## COMPENSATION

Nearly all high-speed operational amplifiers are now internally compensated. To use external compensation capacitors would compromise stability and performance due to bond wire and board parasitic reactances. The LMH6629 gives a degree of flexibility that was lost with on chip compensation. There are two compensation settings that can be controlled by the COMP pin. The default setting is set through an internal pull down resistor and places the COMP pin at the logic 0 state. In this configuration the on chip compensation is set to the maximum and bandwidth is reduced to enable stability at gains as low as 4V/V.

When this pin is driven to the logic 1 state the internal compensation is decreased to allow higher bandwidth at higher gains. In this state the minimum stable gain is 10V/V. Due to the reduced compensation slew rate and large signal bandwidth are significantly enhanced for the higher gains.

## BIAS CURRENT CANCELLATION

The LMH6629 offers exceptional offset voltage accuracy. In order to preserve the low offset voltage errors, care must be taken to avoid voltage errors due to input bias currents. This is important in both inverting and non inverting applications.

The non-inverting circuit is used here as an example. To cancel the bias current errors of the non-inverting configuration, the parallel combination of the gain setting ($R_g$) and feedback ($R_f$) resistors should equal the equivalent source resistance ($R_{seq}$) as defined in *Figure 4*. Combining this constraint with the non-inverting gain equation also seen in *Figure 4* allows both $R_f$ and $R_g$ to be determined explicitly from the following equations:

$$R_f = A_V R_{seq} \text{ and } R_g = R_f/(A_V-1)$$

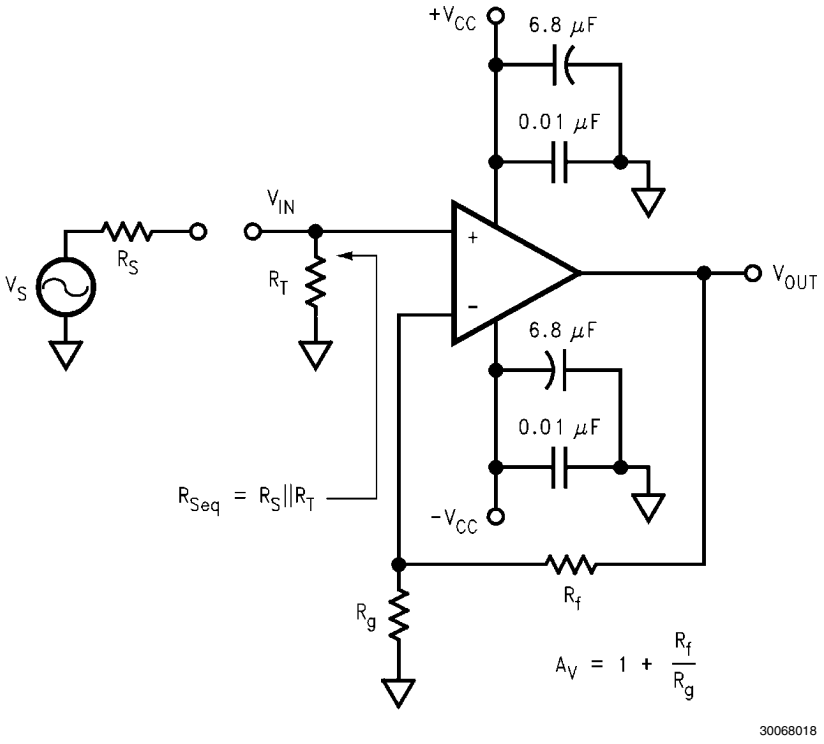



**FIGURE 4. Non-Inverting Amplifier Configuration**

When driven from a 0Ω source, such as the output of an op amp, the non-inverting input of the LMH6629 should be isolated with at least a 25Ω series resistor.

As seen in *Figure 5*, bias current cancellation is accomplished for the inverting configuration by placing a resistor ($R_b$) on the non-inverting input equal in value to the resistance seen by the inverting input ($R_f$ || ($R_g$+$R_s$)). $R_b$ should to be no less than 25Ω for optimum LMH6629 performance. A shunt capacitor (not shown) can minimize the additional noise of $R_b$.

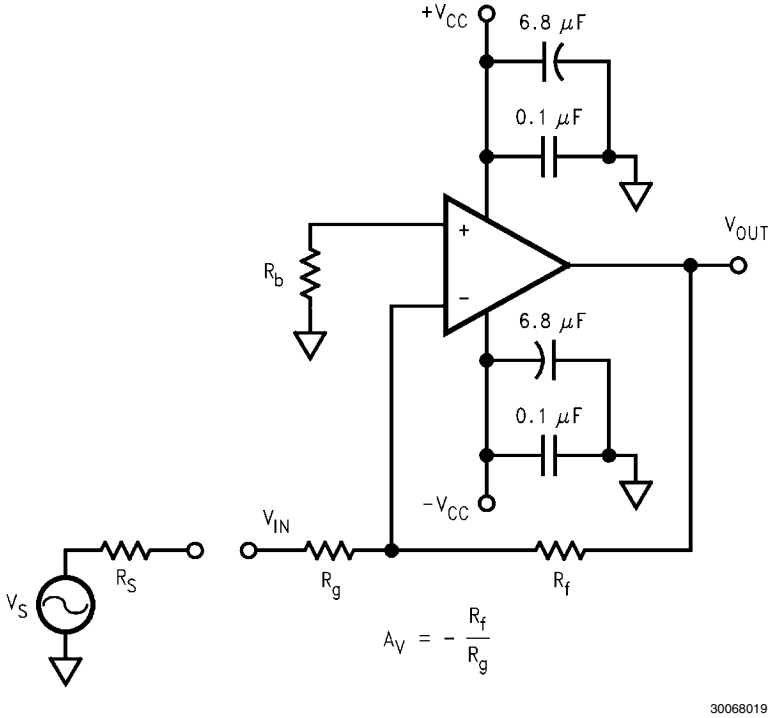



**FIGURE 5. Inverting Amplifier Configuration**

## TOTAL INPUT NOISE vs. SOURCE RESISTANCE

To determine maximum signal-to-noise ratios from the LMH6629, an understanding of the interaction between the amplifier's intrinsic noise sources and the noise arising from its external resistors is necessary. *Figure 6* describes the noise model for the non-inverting amplifier configuration showing all noise sources. In addition to the intrinsic input voltage noise ($e_n$) and current noise ($i_n = i_n^+ = i_n^-$) source, there is also thermal voltage noise ($e_t = \sqrt{(4KTR)}$) associated with each of the external resistors.

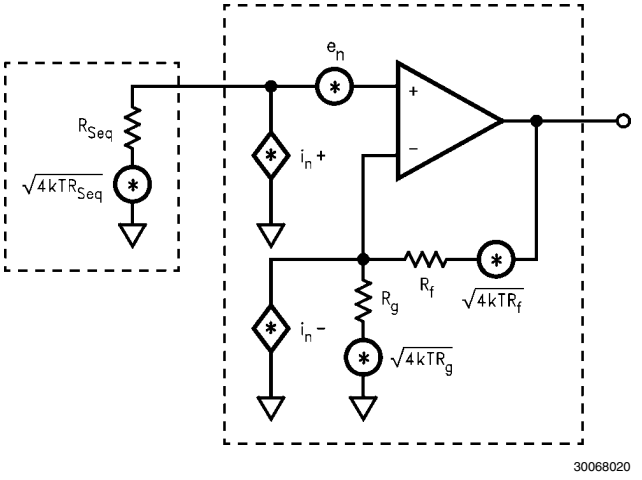



**FIGURE 6. Non-Inverting Amplifier Noise Model**

*Equation 1* provides the general form for total equivalent input voltage noise density ($e_{ni}$).

$$e_{ni} = \sqrt{e_n^2 + \left(i_{n+} R_{Seq}\right)^2 + 4kTR_{Seq} + \left(i_{n-}\left(R_f \| R_g\right)\right)^2 + 4kT\left(R_f \| R_g\right)}$$

**Equation 1: General Noise Equation** (1)

*Equation 2* is a simplification of *Equation 1* that assumes $R_f \| R_g = R_{seq}$ for bias current cancellation:

$$e_{ni} = \sqrt{e_n^2 + 2(i_n R_{Seq})^2 + 4kT(2R_{Seq})}$$

**Equation 2: Noise Equation with $R_f \| R_g = R_{seq}$** (2)

*Figure 7* schematically shows $e_{ni}$ alongside $V_{IN}$ (the portion of $V_S$ source which reaches the non-inverting input of *Figure 4*) and external components affecting gain ($A_v = 1 + R_f / R_g$), all connected to an ideal noiseless amplifier.

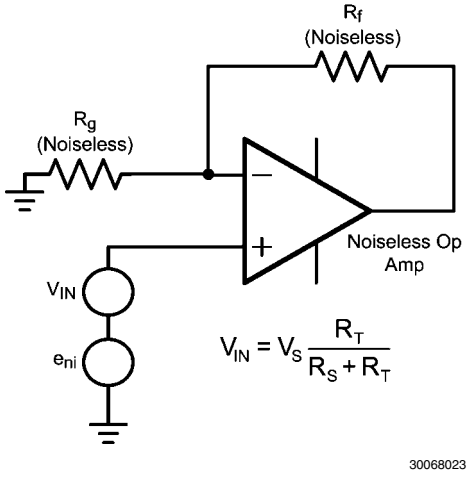



**FIGURE 7. Non-Inverting Amplifier Equivalent Noise Source Schematic**

*Figure 8* illustrates the equivalent noise model using this assumption. *Figure 9* is a plot of $e_{ni}$ against equivalent source resistance ($R_{seq}$) with all of the contributing voltage noise source of *Equation 2*. This plot gives the expected $e_{ni}$ for a given ($R_{seq}$) which assumes $R_f \| R_g = R_{seq}$ for bias current cancellation. The total equivalent output voltage noise ($e_{no}$) is $e_{ni} * A_V$.

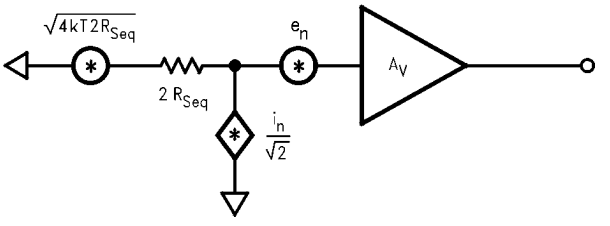



**FIGURE 8. Noise Model with $R_f \| R_g = R_{seq}$**

As seen in *Figure 9*, $e_{ni}$ is dominated by the intrinsic voltage noise ($e_n$) of the amplifier for equivalent source resistances below 15Ω. Between 15Ω and 2.5 kΩ, $e_{ni}$ is dominated by the thermal noise ($e_t = \sqrt{(4kT(2R_{seq}))}$ of the equivalent source resistance $R_{seq}$; incidentally, this is the range of $R_{seq}$ values where the LMH6629 has the best (lowest) Noise Figure (NF) for the case where $R_{seq} = R_f \| R_g$.

Above 2.5 kΩ, $e_{ni}$ is dominated by the amplifier's current noise ($i_n = \sqrt{(2)}\, i_n R_{seq}$). When $R_{seq}$ = 190Ω (i.e., $R_{seq} = e_n / \sqrt{(2)}\, i_n$), the contribution from voltage noise and current noise of LMH6629 is equal. For example, configured with a gain of +10V/V giving a –3dB of 825 MHz and driven from $R_{seq} = R_f \| R_G$ = 20Ω ($e_{ni}$ = 1.07 nV√Hz from *Figure 9*), the LMH6629 produces a total equivalent output noise voltage ($e_{ni}$ * 10 V/V * √(1.57 * 825 MHz)) of 385 $\mu V_{rms}$.

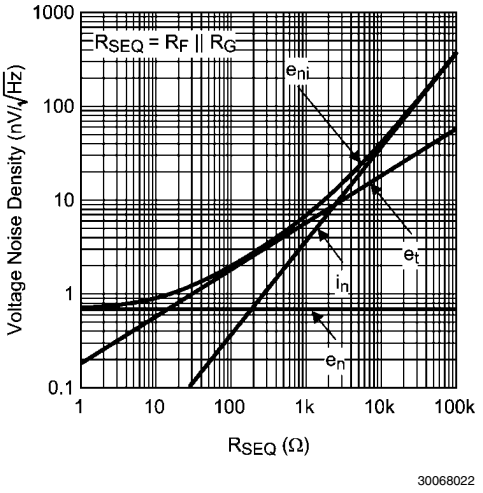



**FIGURE 9. Voltage Noise Density vs. Source Resistance**

If bias current cancellation is not a requirement, then $R_f$ || $R_g$ need not equal $R_{seq}$. In this case, according to *Equation 1*, $R_f$||$R_g$ should be as low as possible to minimize noise. Results similar to *Equation 1* are obtained for the inverting configuration of *Figure 5* if $R_{seq}$ is replaced by $R_b$ and $R_g$ is replaced by $R_g + R_s$. With these substitutions, *Equation 1* will yield an $e_{ni}$ referred to the non-inverting input. Referring $e_{ni}$ to the inverting input is easily accomplished by multiplying $e_{ni}$ by the ratio of non-inverting to inverting gains ($1+R_g/R_f$).

## NOISE FIGURE

Noise Figure (NF) is a measure of the noise degradation caused by an amplifier.

$$NF = 10LOG\left\{\frac{S_i / N_i}{S_o / N_o}\right\} = 10LOG\left\{\frac{e_{ni}^2}{e_t^2}\right\}$$

**Equation 3: General Noise Figure Equation** (3)

Looking at the two parts of the NF expression (inside the log function) yields:

$S_i/S_o \rightarrow$ Inverse of the power gain provided by the amplifier

$N_o/N_i \rightarrow$ Total output noise power, including the contribution of $R_S$, divided by the noise power at the input due to $R_S$

To simplify this, consider $N_a$ as the noise power added by the amplifier (reflected to its input port):

$S_i/S_o \rightarrow 1/G$

$N_o/N_i \rightarrow G * (N_i+N_a) /N_i$ (where $G*(N_i +N_a) = N_o$)

Substituting these two expressions into the NF expression:

$$NF = 10 \log\left[\frac{1}{G}\left(\frac{G(N_i + N_a)}{N_i}\right)\right] = 10 \log\left(1 + \frac{N_a}{N_i}\right)$$

**Equation 4: Simplified Noise Figure Equation** (4)

The noise figure expression has simplified to depend only on the ratio of the noise power added by the amplifier at its input (considering the source resistor to be in place but noiseless in getting $N_a$) to the noise power delivered by the source resistor (considering all amplifier elements to be in place but noiseless in getting $N_i$).

For a given amplifier with a desired closed loop gain, to minimize noise figure:

- Minimize $R_f$||$R_g$
- Choose the Optimum $R_S$ ($R_{OPT}$)

$R_{OPT}$ is the point at which the NF curve reaches a minimum and is approximated by:

$$R_{OPT} \approx e_n/i_n$$

*Figure 10* is a plot of NF vs $R_S$ with the circuit of *Figure 4* ($R_f$ = 240Ω, $A_V$ = +10V/V). The NF curves for both Unterminated ($R_T$ = open) and Terminated systems ($R_T$ = $R_S$) are shown. *Table 1* indicates NF for various source resistances including $R_S = R_{OPT}$.

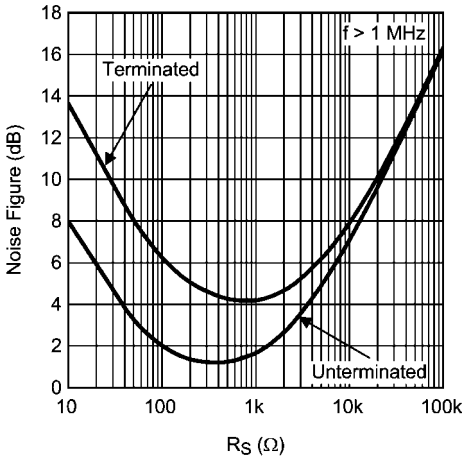



**FIGURE 10. Noise Figure vs. Source Resistance**

**TABLE 1. Noise Figure for Various $R_s$**

| $R_S$ (Ω) | NF (Terminated) (dB) | NF (Unterminated) (dB) |
|---|---|---|
| 50 | 7.96 | 3.18 |
| $R_{OPT}$ | 4.13 ($R_{OPT}$ = 750Ω) | 1.12 ($R_{OPT}$ = 350Ω) |

## SINGLE SUPPLY OPERATION

The LMH6629 can be operated with single power supply as shown in *Figure 11*. Both the input and output are capacitively coupled to set the DC operating point.

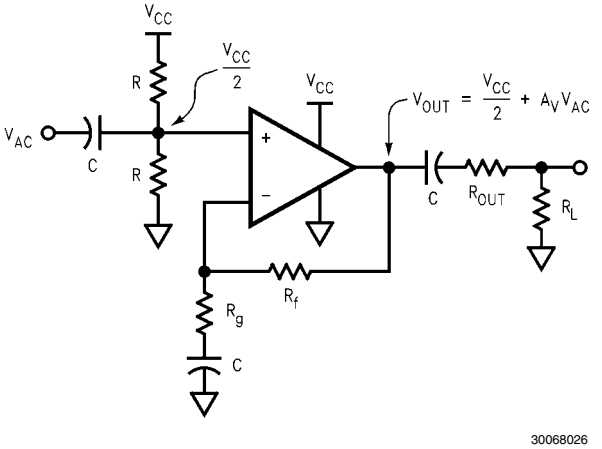
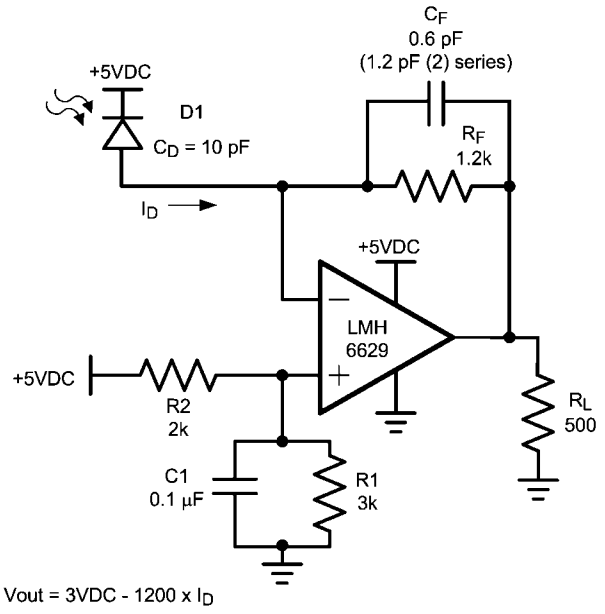



**FIGURE 11. Single Supply Operation**

## LOW-NOISE TRANSIMPEDANCE AMPLIFIER

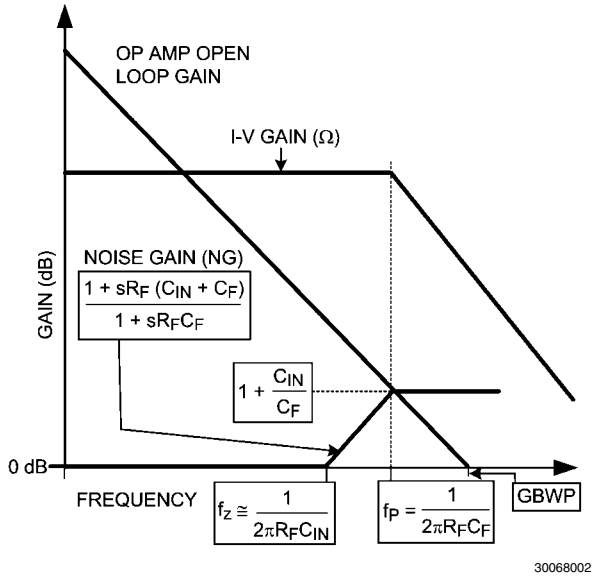
*Figure 12* implements a high speed, single supply, low-noise Transimpedance amplifier commonly used with photo-diodes. The transimpedance gain is set by $R_F$.




30068011

**FIGURE 12. 200MHz Transimpedance Amplifier Configuration**

*Figure 13* shows the Noise Gain (NG) and transfer function (I-V Gain). As with most Transimpedance amplifiers, it is required to compensate for the additional phase lag (Noise Gain zero at $f_Z$) created by the total input capacitance ( $C_D$ (diode capacitance) + $C_{CM}$ (LMH6629 input capacitance) ) looking into $R_F$; this is accomplished by placing $C_F$ across $R_F$ to create enough phase lead (Noise Gain pole at $f_P$) to stabilize the loop.




30068002

**FIGURE 13. Transimpedance Amplifier Noise Gain & Transfer Function**

The optimum value of $C_F$ is given by *Equation 5* resulting in the I-V -3dB bandwidth shown in *Equation 6*, or around 200MHz in this case (assuming GBWP= 4GHz with COMP pin = HI). This $C_F$ value is a "starting point" and $C_F$ needs to be tuned for the particular application as it is often less than 1pF and thus is easily affected by board parasitics, etc. For maximum speed, the LMH6629 COMP pin should be HI.

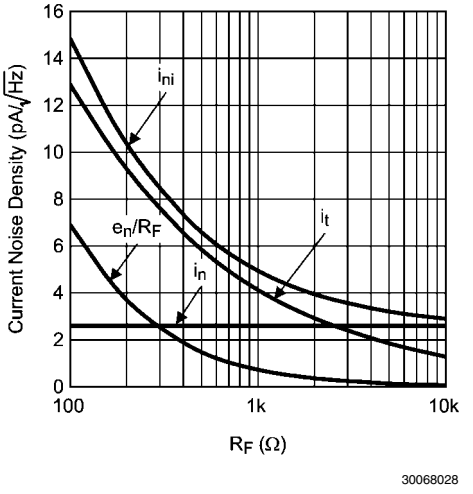
$$C_F = \sqrt{\frac{C_{IN}}{2\pi(GBWP)R_F}}$$

**Equation 5: Optimum $C_F$ Value** (5)

$$f_{-3\,dB} \cong \sqrt{\frac{GBWP}{2\pi R_F C_{IN}}}$$

**Equation 6: Resulting -3dB Bandwidth** (6)

*Equation 7* provides the total input current noise density ($i_{ni}$) equation for the basic Transimpedance configuration and is plotted against feedback resistance ($R_F$) showing all contributing noise sources in *Figure 14*. The plot indicates the expected total equivalent input current noise density ($i_{ni}$) for a given feedback resistance ($R_F$). This is depicted in the schematic of *Figure 15* where total equivalent current noise density ($i_{ni}$) is shown at the input of a noiseless amplifier and noiseless feedback resistor ($R_F$). The total equivalent output voltage noise density ($e_{no}$) is $i_{ni}$*$R_F$.




30068028

**FIGURE 14. Current Noise Density vs. Feedback Resistance**

$$i_{ni} = \sqrt{i_n^2 + \left(\frac{e_n}{R_f}\right)^2 + \frac{4kT}{R_f}}$$

**Equation 7: Noise Equation for Transimpedance Amplifier** (7)

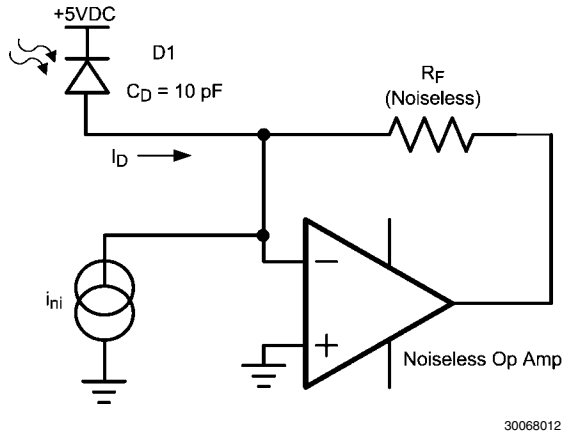



**FIGURE 15. Transimpedance Amplifier Equivalent Input Source Model**

From *Figure 14*, it is clear that with LMH6629's extremely low noise characteristics, for $R_F < 2.5k\Omega$, the noise performance is entirely dominated by $R_F$ thermal noise. Only above this $R_F$ threshold, LMH6629's input noise current ($i_n$) starts being a factor and at no $R_F$ setting does the LMH6629 input noise voltage play a significant role. This noise analysis has ignored the possible noise gain increase, due to photo-diode capacitance, at higher frequencies.

## LOW-NOISE INTEGRATOR

The LMH6629 implement a deBoo integrator shown in *Figure 16*. Positive feedback maintains integration linearity. The LMH6629's low input offset voltage and matched inputs allow bias current cancellation and provide for very precise integration. Keeping $R_G$ and $R_S$ low helps maintain dynamic stability.

$$V_O \cong V_{IN} \frac{K_O}{sR_SC} \quad ; \quad K_O = 1 + \frac{R_F}{R_G}$$

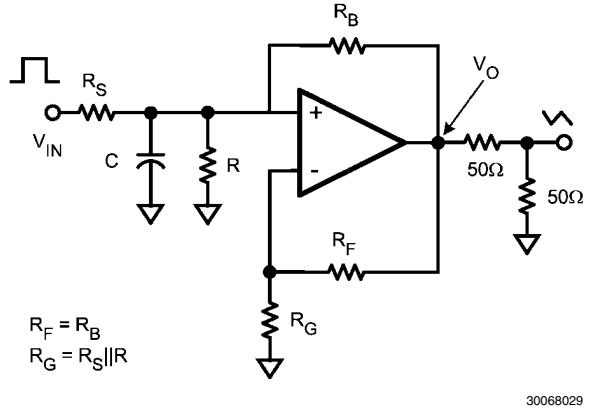



**FIGURE 16. Noise Integrator**

## HIGH-GAIN SALLEN-KEY ACTIVE FILTERS

The LMH6629 is well suited for high-gain Sallen-Key type of active filters. *Figure 17* shows the 2nd order Sallen-Key low-pass filter topology. Using component predistortion methods discussed in OA-21 enables the proper selection of components for these high-frequency filters.

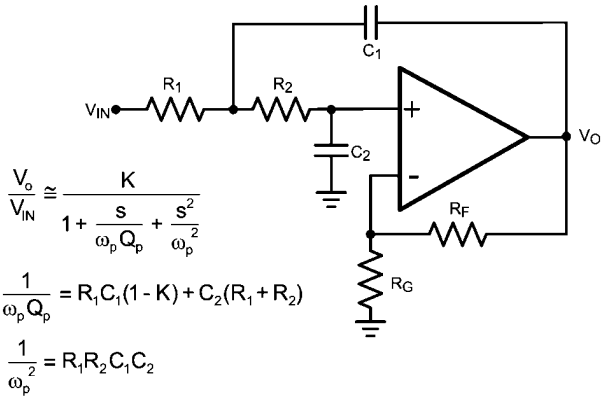



**FIGURE 17. Low Pass Sallen-Key Active Filter Topology**

## LOW-NOISE MAGNETIC MEDIA EQUALIZER

The LMH6629 implement a high-performance low-noise equalizer for such application as magnetic tape channels as shown in *Figure 18*. The circuit combines an integrator (used to limit noise) with a bandpass filter (used to boost the response centered at a frequency or over a band of interest) to produce the low noise equalization. The circuit's simulated frequency response is illustrated in *Figure 19*.

In this circuit, the bandpass filter center frequency is set by

$$f_C = \frac{1}{2\pi\sqrt{LC}}$$

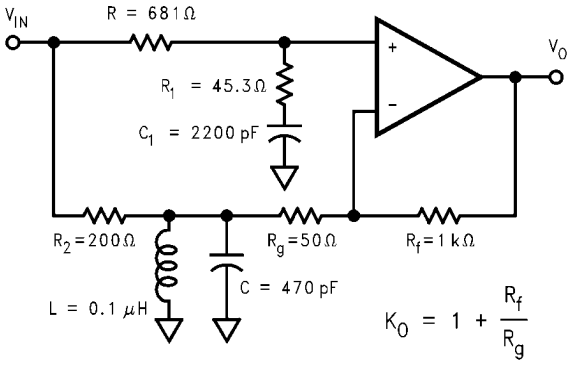
For higher selectivity, use high C values; for wider bandwidth, use high L values, while keeping the product of L and C values the same to keep $f_c$ intact. The integrator's -3dB roll-off is set by

$$\frac{1}{2\pi C_1(R_1 + R)}$$

If

$$\frac{1}{2\pi C_1 R_1} << f_C$$

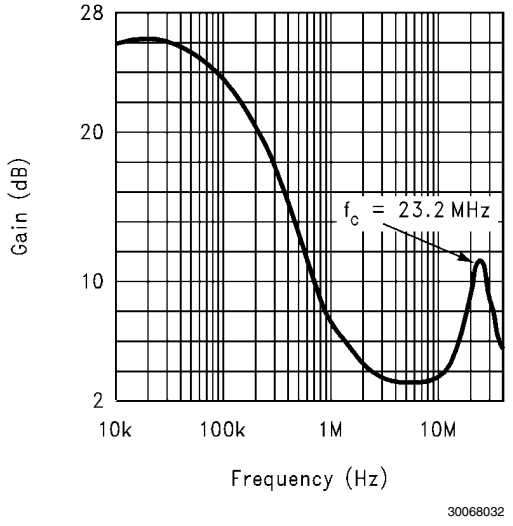
the integrator and the bandpass filter frequency interaction is minimized so that the operating frequencies of each can be set independently. Lowering the value of R2 increases the bandpass gain (boost) without affecting the integrator frequencies. With the LMH6629's wide Gain Bandwidth (4GHz), the center frequency could be adjusted higher without worries about loop gain limitation. This increases flexibility in tuning the circuit.




$$\frac{V_O}{V_{IN}} = K_O \left( \frac{sC_1 R_1 + 1}{sC_1 (R_1 + R) + 1} - \left( \frac{R_f}{R_f + R_g} \right) \frac{sLR_g}{s^2 LCR_2 R_g + sL(R_2 + R_g) + R_2 R_g} \right)$$

30068031

**FIGURE 18. Low-Noise Magnetic Media Equalizer**




30068032

**FIGURE 19. Equalizer Frequency Response**

## LAYOUT CONSIDERATIONS

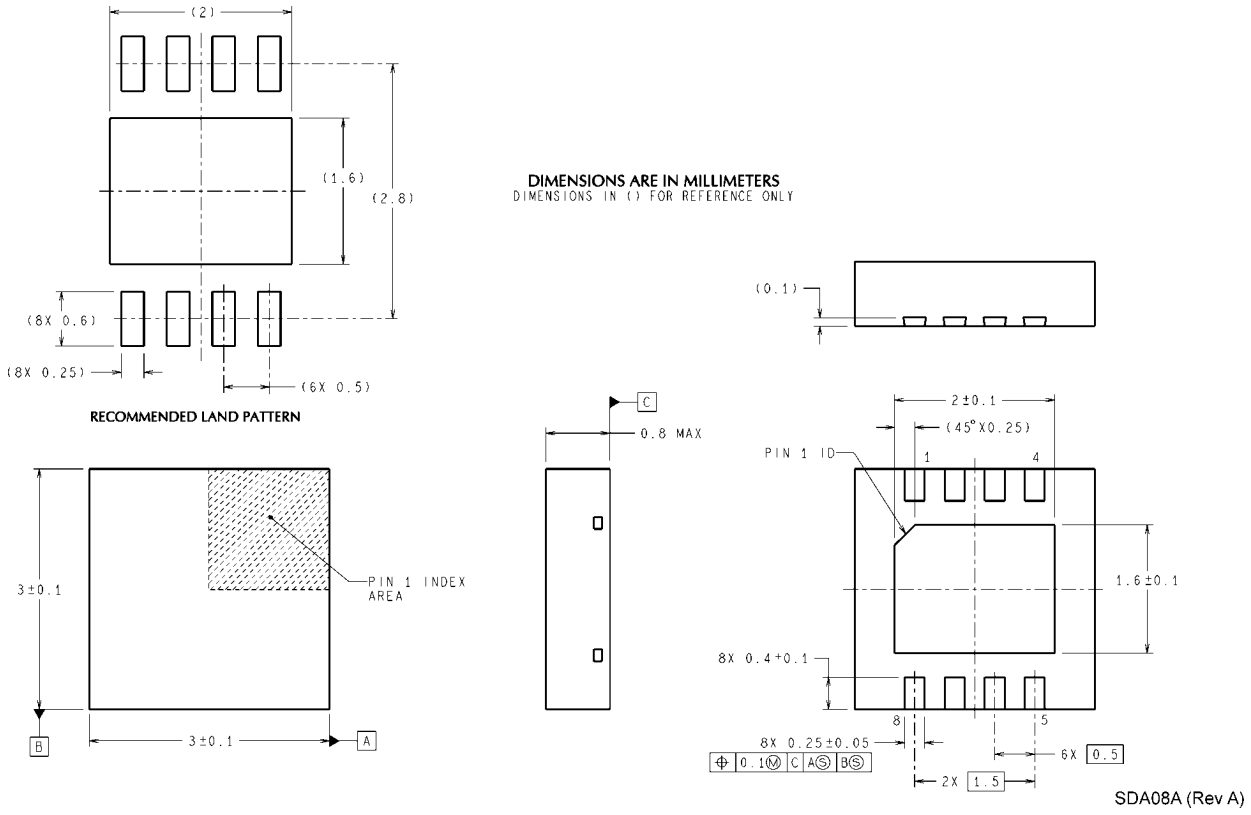
National Semiconductor suggests the copper patterns on the evaluation board(s) for this product. These board(s) are also useful as an aid in device testing and characterization. As is the case with all high-speed amplifiers, accepted-practice RF design technique on the PCB layout is mandatory. Generally, a good high frequency layout exhibits a separation of power supply and ground traces from the inverting input and output pins. Parasitic capacitances between these nodes and ground may cause frequency response peaking and possible circuit oscillations (see Application Note OA-15 for more information). Use high-quality chip capacitors with values in the range of 1000 pF to 0.1F for power supply bypassing. One terminal of each chip capacitor is connected to the ground plane and the other terminal is connected to a point that is as close as possible to each supply pin as allowed by the manufacturer's design rules. In addition, connect a tantalum capacitor with a value between 4.7 µF and 10 µF in parallel with the chip capacitor.

Signal lines connecting the feedback and gain resistors should be as short as possible to minimize inductance and microstrip line effect. Place input and output termination resistors as close as possible to the input/output pins. Traces greater than 1 inch in length should be impedance matched to the corresponding load termination.

Symmetry between the positive and negative paths in the layout of differential circuitry should be maintained to minimize the imbalance of amplitude and phase of the differential signal.

Component value selection is another important parameter in working with high-speed/high-performance amplifiers. Choosing external resistors that are large in value compared to the value of other critical components will affect the closed loop behavior of the stage because of the interaction of these resistors with parasitic capacitances. These parasitic capacitors could either be inherent to the device or be a by-product of the board layout and component placement. Moreover, a large resistor will also add more thermal noise to the signal path. Either way, keeping the resistor values low will diminish this interaction. On the other hand, choosing very low value resistors could load down nodes and will contribute to higher overall power dissipation and high distortion.

## Physical Dimensions inches (millimeters) unless otherwise noted




**8-Pin LLP**
**NS Package Number SDA08A**

# Notes

# Notes

**For more National Semiconductor product information and proven design tools, visit the following Web sites at: www.national.com**

| Products | | Design Support | |
|---|---|---|---|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/ldo | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage References | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Applications & Markets | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempsensors | SolarMagic™ | www.national.com/solarmagic |
| PLL/VCO | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com

**National Semiconductor Americas Technical Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan Technical Support Center**
Email: jpn.feedback@nsc.com