LMV321/LMV358/LMV324

GENERAL PURPOSE, LOW VOLTAGE, RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS

Description

The LMV321/LMV358/LMV324 are low voltage (2.7V to 5.5V) single, dual and quad operational amplifiers. The LMV321/LMV358/LMV324 are designed to effectively reduce cost and space at low voltage levels.

These devices have the capability of rail-to-rail output swing and input common-mode voltage range includes ground. They can also achieve an efficient speed-to-power ratio, utilizing 1 MHz bandwidth and 1 V/µs slew rate at a low supply current. Reducing noise pickup and increasing signal integrity can be achieved by placing the device close to the signal source.

The LMV321 is available in 5-Pin SOT353/SOT25 packages that reduce space on PC boards and portable electronic devices. The LMV324 is available in the SOP-14L and TSSOP-14L package.

The LMV358 is available in the MSOP-8L and SOP-8L packages.


Features

(For V^+=5V and V^-=0V typical unless otherwise noted)

- Guaranteed 2.7V and 5V performance
- Crossover distortion eliminated
- Operating temperature range (-40°C to +85°C)
- Gain-bandwidth product 1 MHz
- Low supply current
  - LMV321 110 µA Typ
  - LMV358 190 µA Typ
  - LMV324 340 µA Typ
- Rail-to-rail output swing @ 10 kΩ
  - V^+ -10 mV
  - V^- +10 mV
- Input Common Mode Voltage Range (-0.2 to V^+ -0.8V)
- Manufactured in standard CMOS process
- SOT353, SOT25, MSOP-8L, SOP-8L, SOP-14L & TSSOP-14L: Available in “Green” Molding Compound (No Br, Sb)
- Lead-free Finish/ RoHS Compliant (Note 1)


Pin Assignments

(Top View)

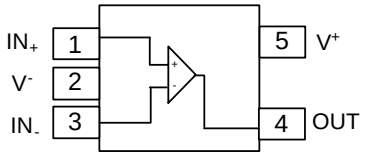


SOT25 / SOT353

(Top View)

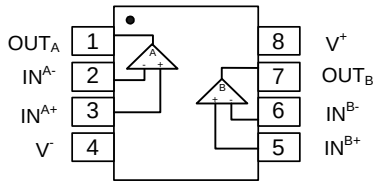

SOP-8L / MSOP-8L

(Top View)

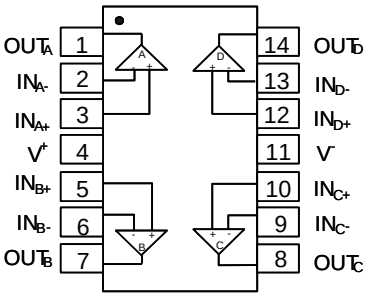

SOP-14L / TSSOP-14L

Application

- Active filters
- General purpose low voltage applications
- General purpose portable devices

Notes: 1. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied. Please visit our website at http://www.diodes.com/products/lead_free.html

© Diodes Incorporated

Absolute Maximum Ratings (Note 2)

Symbol	Description		Rating	Unit
ESD HBM	Human Body Model ESD Protection	LMV321	4.0	KV
		LMV358	4.0	
		LMV324	4.5	
ESD MM	Machine Model ESD Protection	LMV321	350	V
		LMV358	350	
		LMV324	250	
	Differential Input Voltage		±Supply Voltage	V
V^+ -V^-	Supply Voltage		5.5	V
	Output Short Circuit to V^+		(Note 3)	
	Output Short Circuit to V^-		(Note 4)	
T_{ST}	Storage Temperature		-65 to 150	°C
T_J	Maximum Junction Temperature		150	°C

Notes:
2. Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.
3. Shorting output to V+ will adversely affect reliability.
4. Shorting output to V- will adversely affect reliability.

Recommended Operating Conditions

Symbol	Description	Rating	Unit
V^+ -V^-	Supply Voltage	2.7 to 5.5	V
T_A	Operating Ambient Temperature Range	-40 to +85	°C

© Diodes Incorporated

Electrical Characteristics

2.7V DC Electrical Characteristics

Unless otherwise specified, all limits guaranteed for T_A = 25°C, V^+ = 2.7V, V^- = 0V, V_{CM} = 1.0V, V_O = V^+/2 and R_L > 1 MΩ.

Symbol	Parameter	Test Conditions	Min (Note 6)	Typ. (Note 5)	Max (Note 6)	Unit
V_{OS}	Input Offset Voltage			1.7	7	mV
TCV_{OS}	Input Offset Voltage Average Drift			5		µV/°C
I_B	Input Bias Current			10		nA
I_{OS}	Input Offset Current			5	50	nA
CMRR	Common Mode Rejection Ratio	0V ≤ V_{CM} ≤ 1.7V	50	63		dB
PSRR	Power Supply Rejection Ratio	2.7V ≤ V^+ ≤ 5V V_O = 1V	50	60		dB
V_{CMR}	Input Common-Mode Voltage Range	For CMRR ≥ 50dB	0	-0.2		V
				1.9	1.7	
V_O	Output Swing	R_L = 10 kΩ to 1.35V	V^+ - 100	V^+ - 20		mV
				20	100	
I_S	Supply Current	LMV321 Single amplifier		110	140	µA
		LMV358 Both amplifiers		190	340	µA
		LMV324 All four amplifiers		340	680	µA

2.7V AC Electrical Characteristics

Unless otherwise specified, all limits guaranteed for T_A = 25°C, V^+ = 2.7V, V^- = 0V, V_{CM} = 1.0V, V_O = V^+/2 and R_L > 1 MΩ.

GBWP	Gain-Bandwidth Product	C_L = 200 pF		1		MHz
Φm	Phase Margin			60		Deg
Gm	Gain Margin			10		dB
e_n	Input-Referred Voltage Noise	f > 50 kHz		23		$\frac{nV}{\sqrt{Hz}}$

© Diodes Incorporated

Electrical Characteristics (Continued)

5V DC Electrical Characteristics

Unless otherwise specified, all limits guaranteed for T_A = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = 2.0V, V_O = V^+/2 and R_L > 1 MΩ.

Symbol	Parameter	Test Conditions			Min (Note 6)	Typ. (Note 5)	Max (Note 6)	Unit
V_{OS}	Input Offset Voltage	T_A = 25°C				1.7	7	mV
		T_A = full range					9	
TCV_{OS}	Input Offset Voltage Average Drift					5		µV/°C
I_B	Input Bias Current	T_A = 25°C				15	250	nA
		T_A = full range					500	
I_{OS}	Input Offset Current	T_A = 25°C				5	50	nA
		T_A = full range					150	
CMRR	Common Mode Rejection Ratio	0V ≤ V_{CM} ≤ 4.0V			50	65		dB
PSRR	Power Supply Rejection Ratio	2.7V ≤ V^+ ≤ 5V V_O = 1V, V_{CM} = 1V			50	60		dB
V_{CMR}	Input Common-Mode Voltage Range	For CMRR ≥ 50dB			0	-0.2		V
						4.2	4.0	
A_V	Large Signal Voltage Gain	R_L = 2 kΩ (Note 7)	T_A = 25°C		15	100		V/mV
			T_A = full range		10			
V_O	Output Swing	R_L = 2 kΩ to 2.5V	High level	T_A = 25°C	V^+ - 300	V^+ - 50		mV
				T_A = full range	V^+ - 400			
			Low level	T_A = 25°C		50	300	
				T_A = full range			400	
		R_L = 10 kΩ to 2.5V	High level	T_A = 25°C	V^+ - 100	V^+ - 10		
				T_A = full range	V^+ - 200			
			Low level	T_A = 25°C		10	180	
				T_A = full range			280	
I_O	Output Short Circuit Current	Sourcing, V_O = 0V			5	60		mA
		Sinking, V_O = 5V			10	90		
I_S	Supply Current	LMV321 Single amplifier				110	140	µA
		LMV358 Both amplifiers	T_A = 25°C			190	340	
			T_A = full range				600	
		LMV324 All four amplifiers	T_A = 25°C			340	680	
			T_A = full range				1100	
θ_{JA}	Thermal Resistance Junction-to-Ambient	SOT353 (Note 8)				330		°C/W
		SOT25 (Note 8)				250		
		TSSOP-14L (Note 8)				100		
		MSOP-8L (Note 8)				203		
		SOP-8L (Note 8)				150		
		SOP-14L (Note 8)				83		

© Diodes Incorporated

Electrical Characteristics (Continued)

5V AC Electrical Characteristics Unless otherwise specified, all limits guaranteed for T_A = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = 2.0V, VO = V^+/2 and R_L > 1 MΩ. **Boldface** limits apply at the temperature extremes.						
SR	Slew Rate	(Note 9)		1		V/µs
GBWP	Gain-Bandwidth Product	C_L = 200 pF		1		MHz
Φ_m	Phase Margin			60		Deg
G_m	Gain Margin			10		dB
e_n	Input-Referred Voltage Noise	f > 50 kHz		23		$\frac{nV}{\sqrt{H_Z}}$


Notes:
5. Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
6. All limits are guaranteed by testing or statistical analysis.
7. R_L is connected to V-. The output voltage is $0.5V \le V_O \le 4.5V$.
8. All numbers are typical, and apply for packages soldered directly onto a PC board in still air.
9. Connected as voltage follower with 3V step input. Number specified is the slower of the positive and negative slew rates.

© Diodes Incorporated


Typical Performance Characteristics

Unless otherwise specified, Vs=+5V, single supply, T_A=25°C


Supply Current vs. Supply Voltage

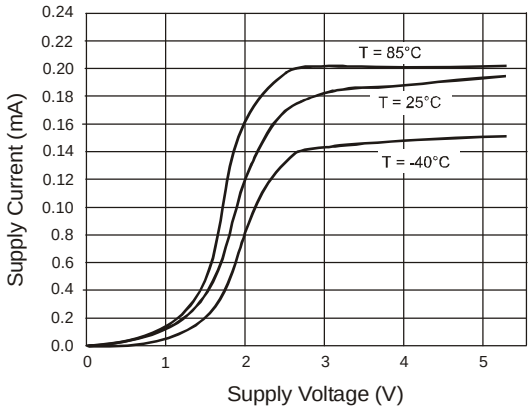


Output Voltage Swing vs. Supply Voltage

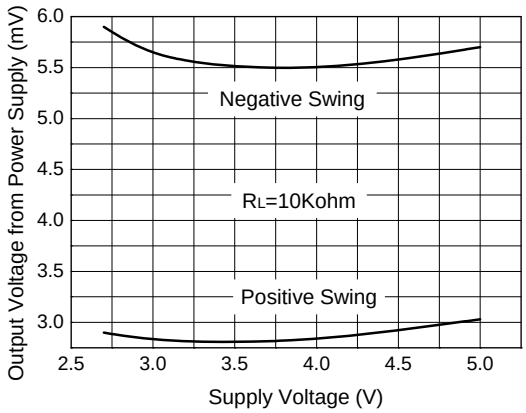


PSRR vs. Frequency

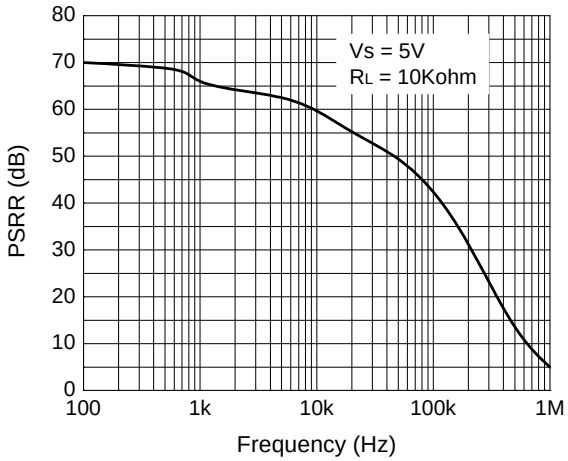


CMRR vs. Frequency

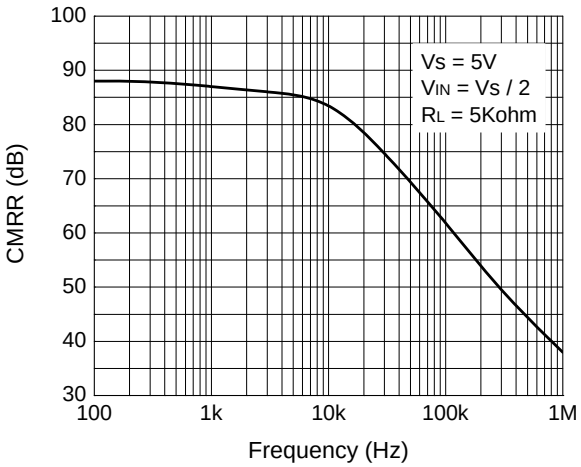

CMRR vs. Input Common Mode Voltage

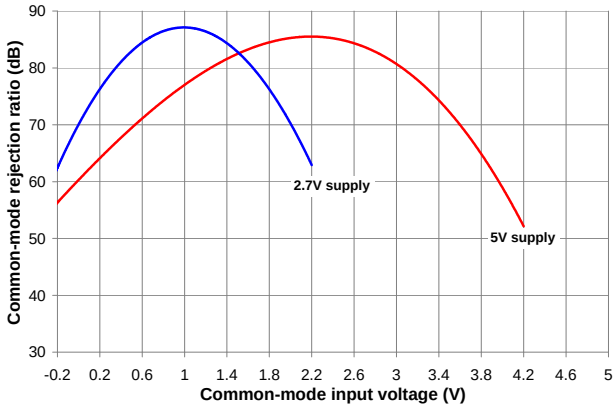


ΔVos vs. CMR

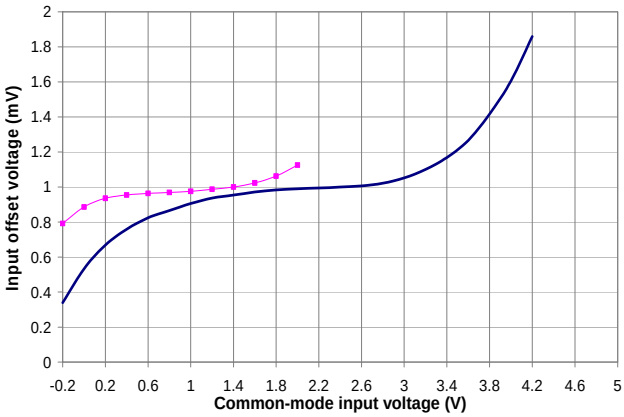


© Diodes Incorporated

Typical Performance Characteristics (Continued)


Sourcing Current vs. Output Voltage (2.7V)

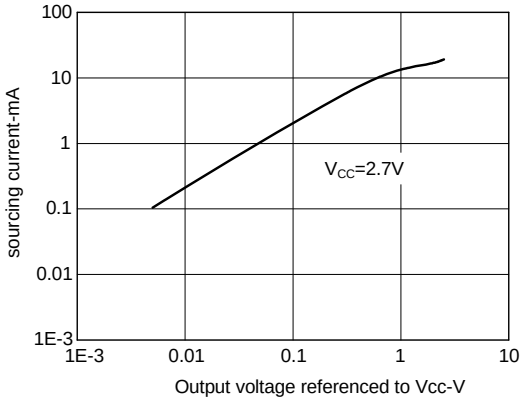


Sourcing Current vs. Output Voltage (5V)

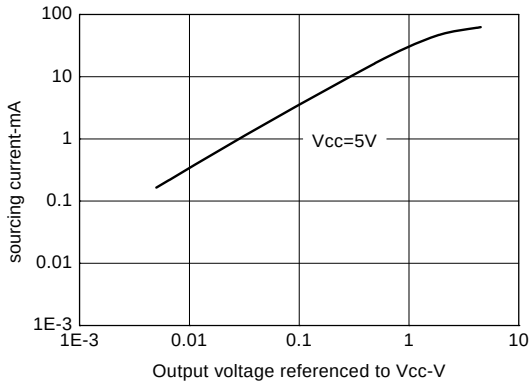


Sinking Current vs. Output Voltage (2.7V)

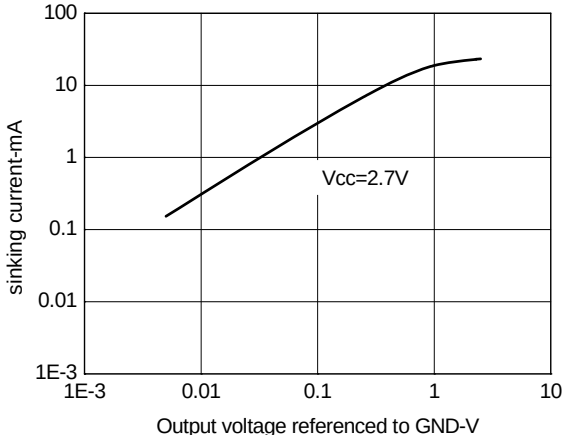


Sinking Current vs. Output Voltage (5V)

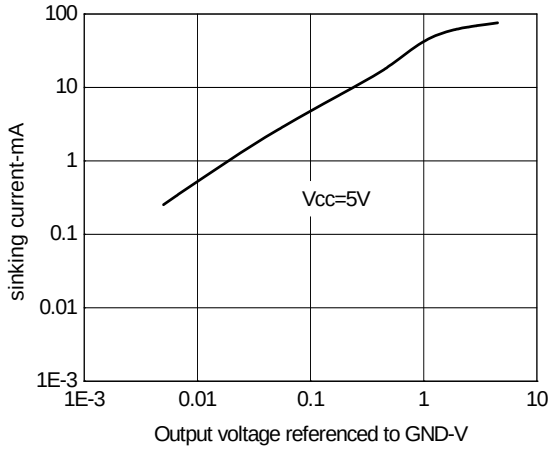

Input Voltage vs. Output Voltage

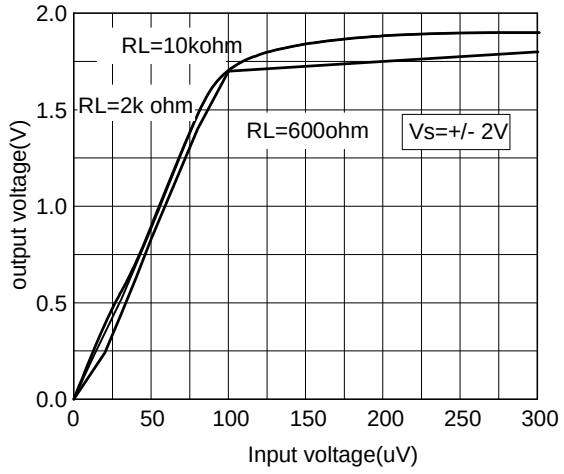


Output voltage vs. input voltage

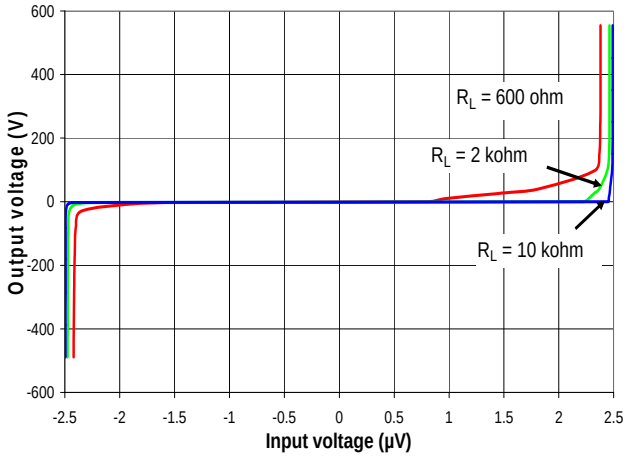


© Diodes Incorporated

Typical Performance Characteristics (Continued)


Frequency Response vs. Resistive Load (2.7V)

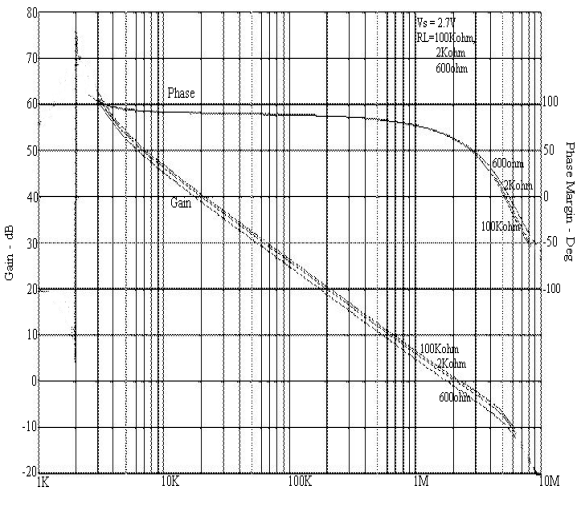


Frequency Response vs. Resistive Load (5V)

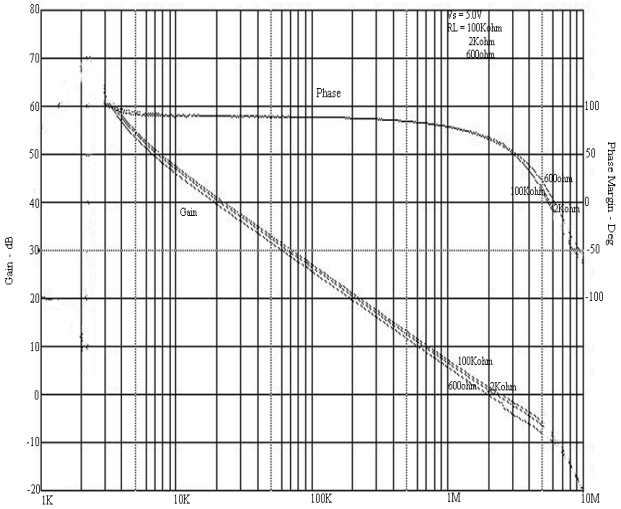


Frequency Response vs. Capacitive Load (2.7V)

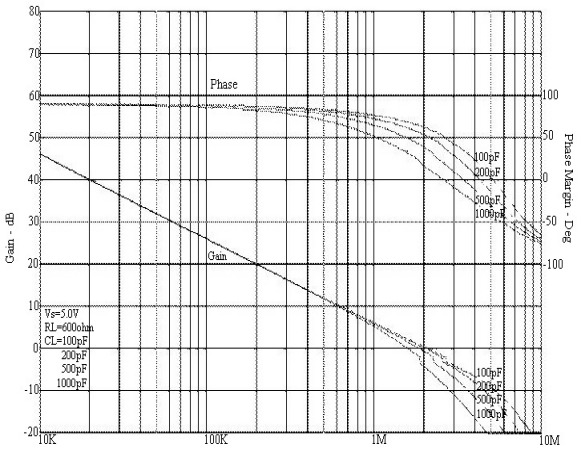

Frequency Response vs. Capacitive Load (5V)

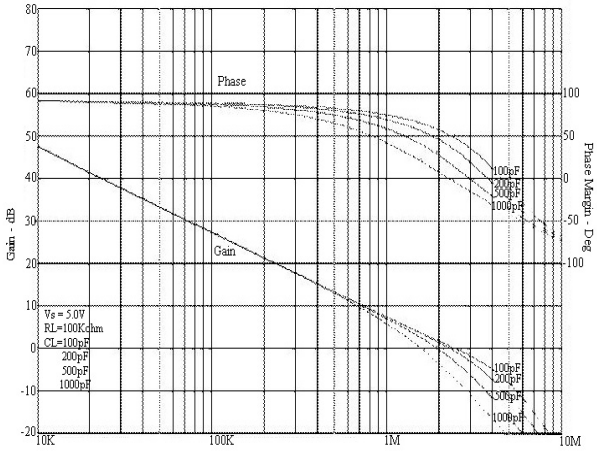


Crosstalk vs. Frequency

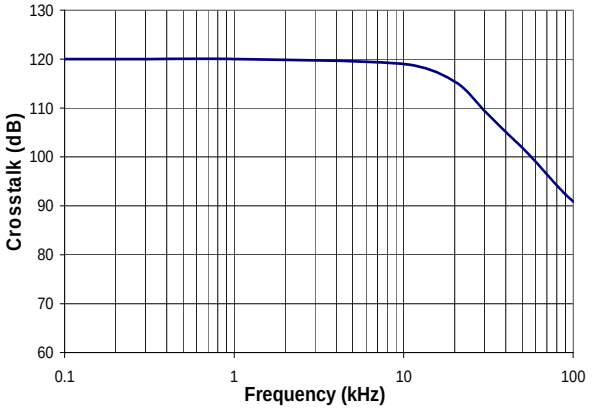


© Diodes Incorporated

Typical Performance Characteristics (Continued)


Inverting Large Signal Pulse Response

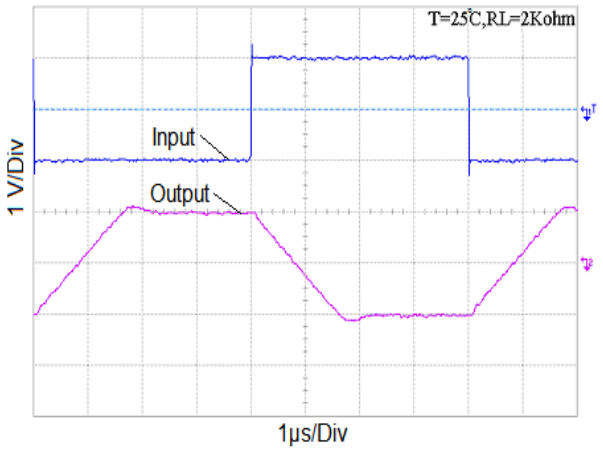


Inverting Large Signal Pulse Response

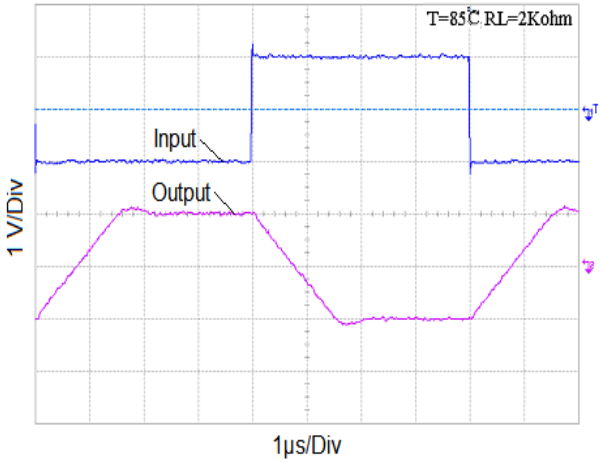


Inverting Large Signal Pulse Response

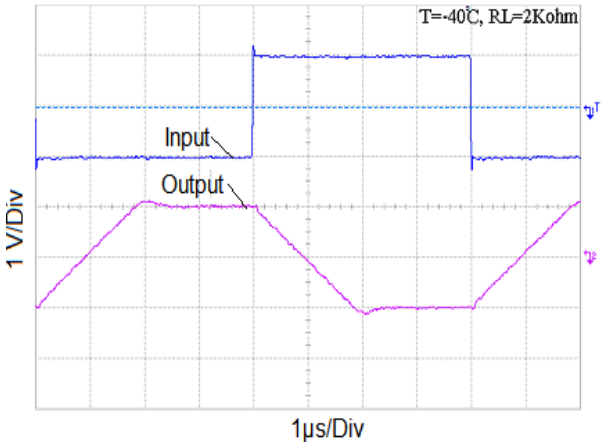


Inverting Small Signal Pulse Response

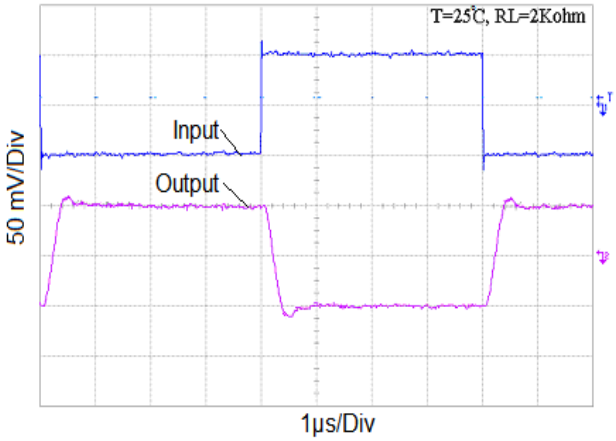

Inverting Small Signal Pulse Response

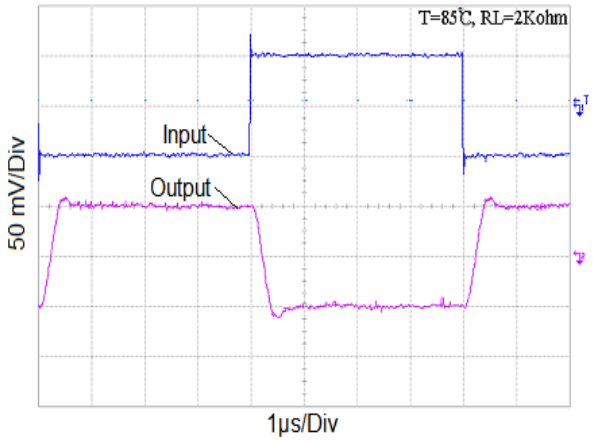


Inverting Small Signal Pulse Response

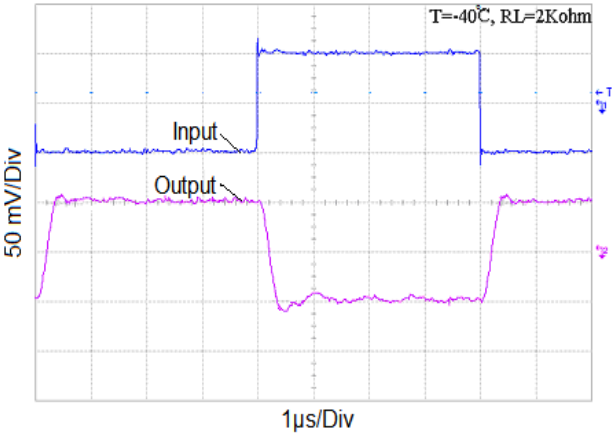


© Diodes Incorporated

Typical Performance Characteristics (Continued)


Stability vs. Capacitive Load

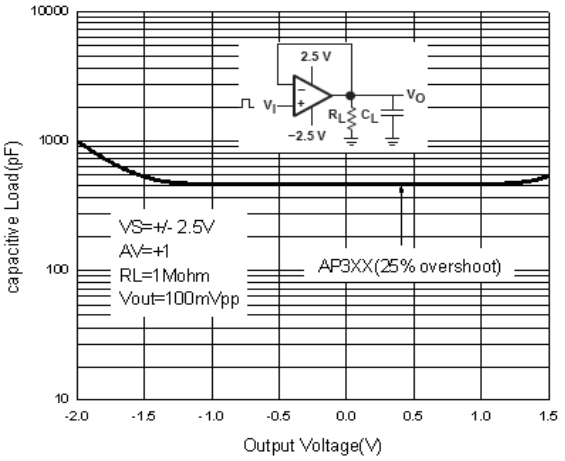


Stability vs. Capacitive Load

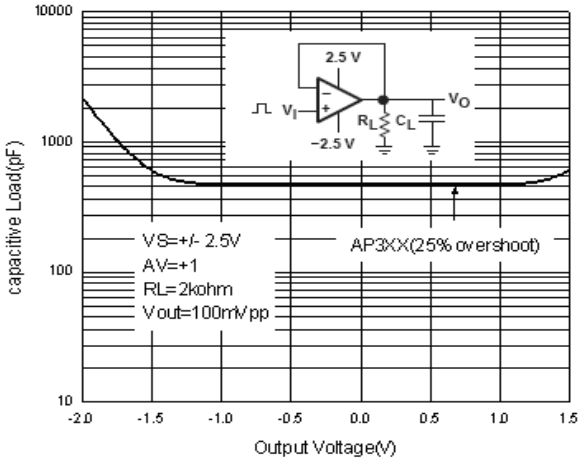


Stability vs. Capacitive Load

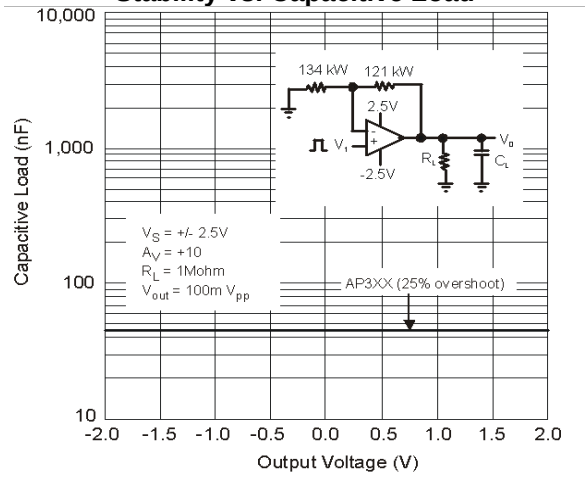


Stability vs. Capacitive Load

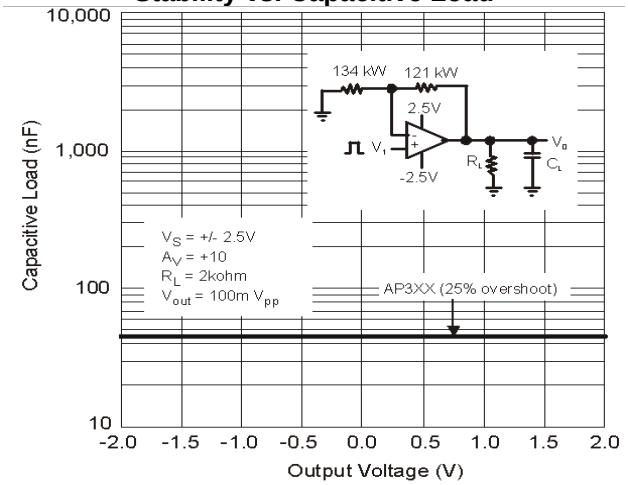

Slew Rate vs. Supply Voltage

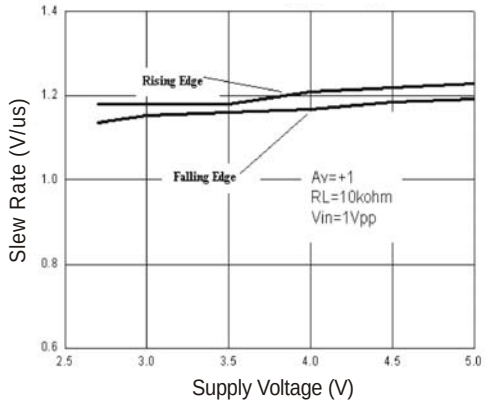

Input Voltage Noise

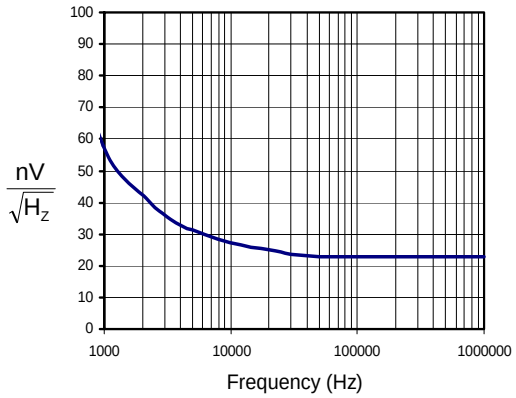

© Diodes Incorporated

Ordering Information

LMV3 XX XX G - X

Part Number	Package	Green	Packing
21 : Single (Note 10)	W : SOT 25	G : Green	7/13 : Tape & Reel
24 : Quad (Note 11)	SE : SOT 353		
58 : Dual (Note 12)	B : SOP 14L		
	TS : TSSOP -14L		
	S : SOP 8L		
	M8 : MSOP -8L		


Device	Package Code	Packaging (Note 13)	7"/13" Tape and Reel	
			Quantity	Part Number Suffix
LMV321WG-7	W	SOT25	3000/Tape & Reel	-7
LMV321SEG-7	SE	SOT353	3000/Tape & Reel	-7
LMV324BG-13	B	SOP-14L	2500/Tape & Reel	-13
LMV324TSG-13	TS	TSSOP-14L	2500/Tape & Reel	-13
LMV358SG-13	S	SOP-8L	2500/Tape & Reel	-13
LMV358M8G-13	M8	MSOP-8L	2500/Tape & Reel	-13

Notes:
10. LMV321 is only available for SOT25 and SOT353.
11. LMV324 is only available for SOP-14L and TSSOP-14L.
12. LMV358 is only available for SOP-8L and MSOP-8L.
13. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

Marking Information

SOT25 / SOT353

(Top View)



XX : Identification Code
Y : Year : 0~9
W : Week : A~Z : 1~26 week;
a~z : 27~52 week;
z represents 52 and 53 week
X : A~Z : Green


Device	Package type	Identification Code
LMV321W	SOT25	BX
LMV321SE	SOT353	BY

© Diodes Incorporated

Marking Information (Continued)


SOP-14L / TSSOP-14L

(Top View)

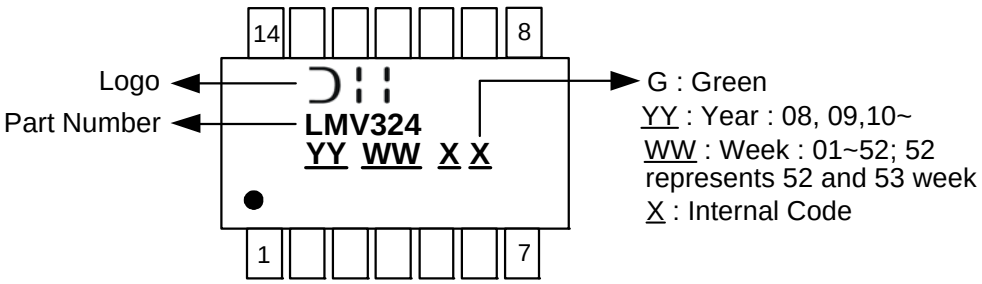


SOP-8L

(Top view)

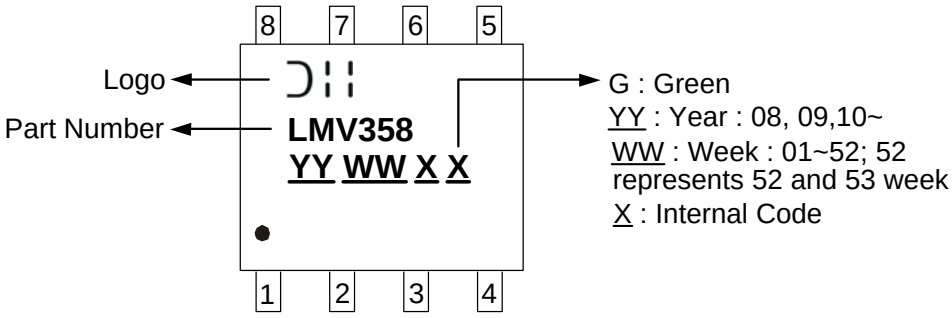

MSOP-8L


(Top view)

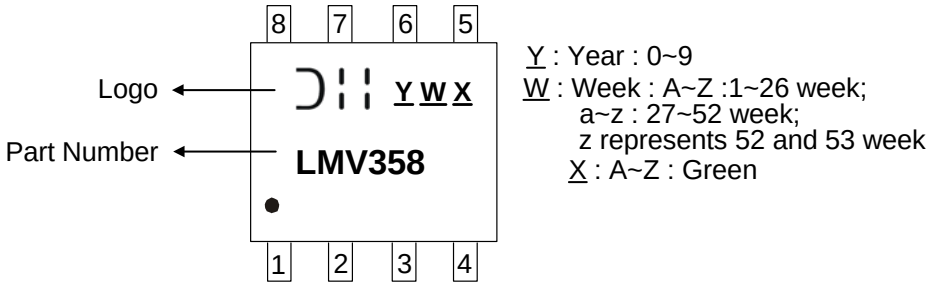


© Diodes Incorporated

Package Information

Package Type: SOT25

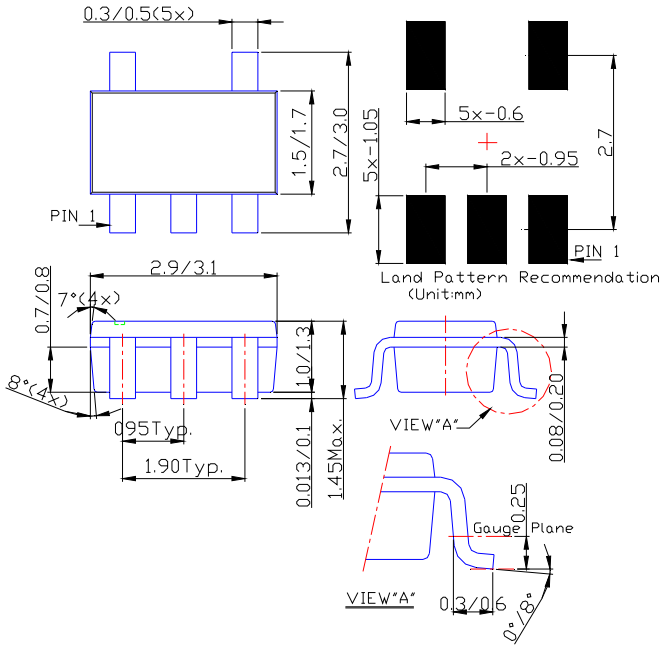


Package Type: SOT353

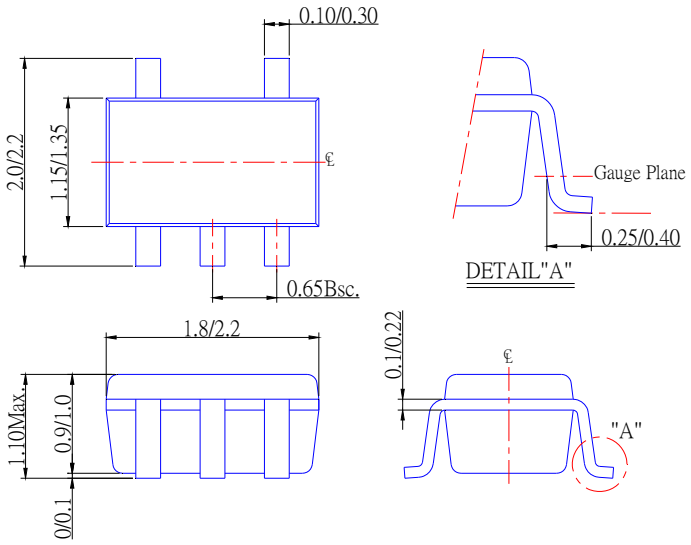


© Diodes Incorporated

Package Information (Continued)

Package Type: SOP-14L

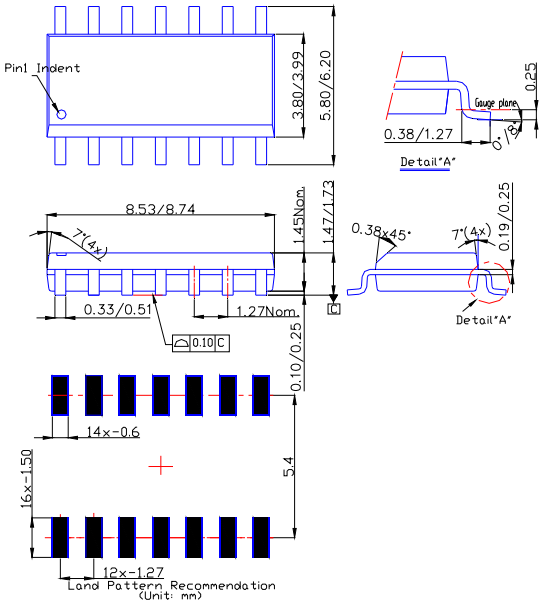


Package Type: TSSOP-14L

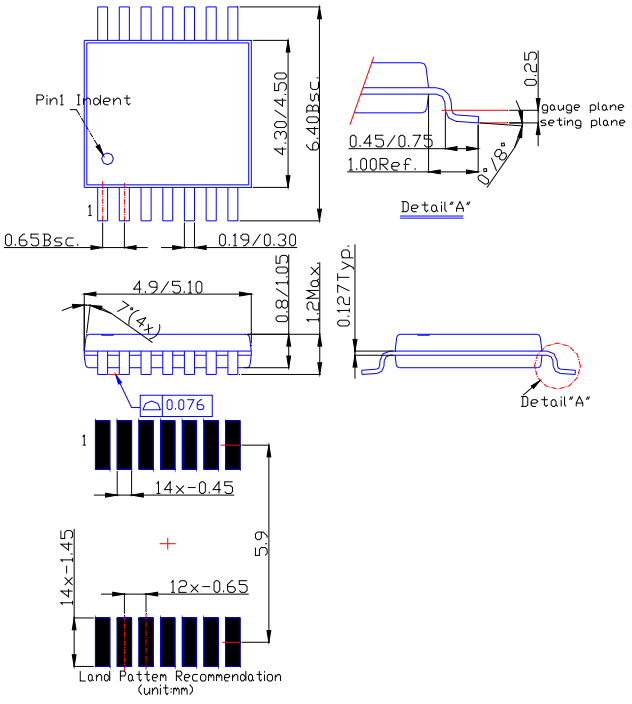


© Diodes Incorporated

Package Information (Continued)

Package Type: SOP-8L

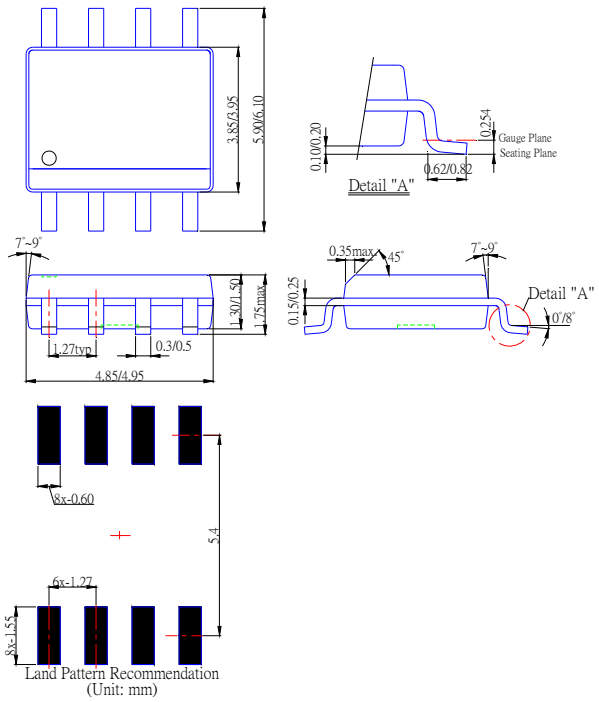

Package Type: MSOP-8L

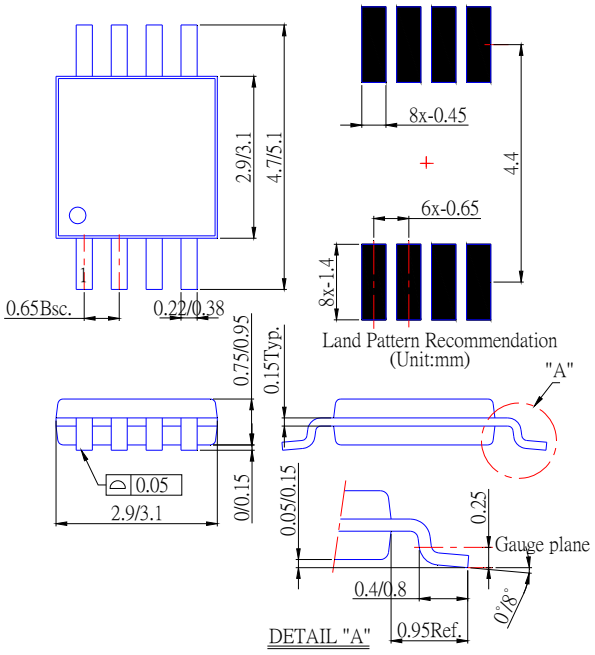

© Diodes Incorporated

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or

2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2011, Diodes Incorporated

www.diodes.com