

LO566PBL4-70H-A

Features

All Plastic Mold Type
High Luminous Intensity
Low Current Requirement
Tinted Diffused Lens
Wide Viewing Angle Up To 70° x 45°



ATTENTION

OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE DEVICES

Applications


Backlighting
Full Color/RGB Video Signs
Time/Temperature Boards
VMS

Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Unit
Forward Current	I _F	25	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	105.00	mW
Operating Temperature	T _{opr}	-40 ~ +95	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Soldering Temperature	T _{sol}	260	°C
Soldering Time	—	for 3 sec. max	—

Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V _F	I _F =20mA	—	3.60	4.20	V
Reverse Current	I _R	V _R =5V	—	—	100	μA
Luminous Intensity	I _v	I _F =20mA	280.00	550.00	—	mcd
Viewing Angle	2θ ^{1/2}	—	—	65° x 45°	—	deg.
Peak Wavelength	λ _p	I _F =20mA	—	465	—	nm
Dominant Wavelength	λ _d	I _F =20mA	—	470	—	nm
Spectral Line Half Width	Δλ	I _F =20mA	—	28	—	nm

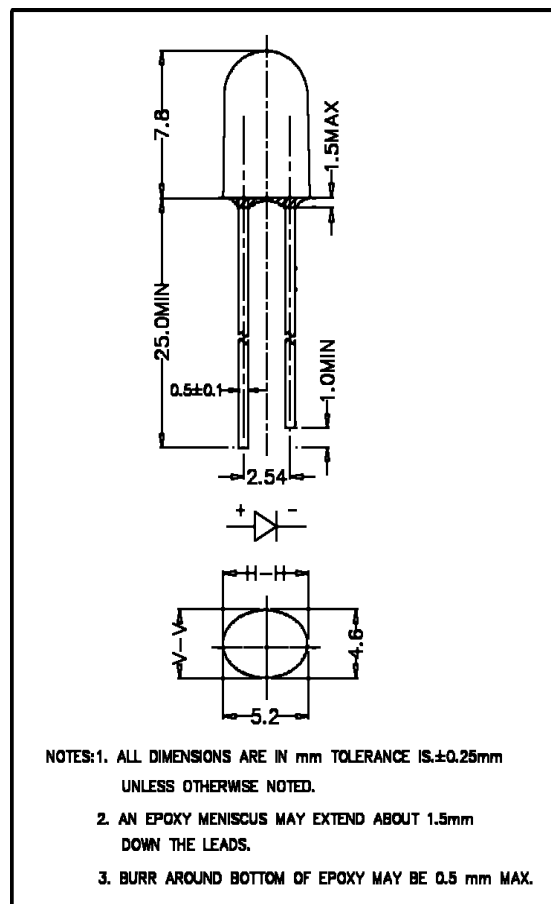

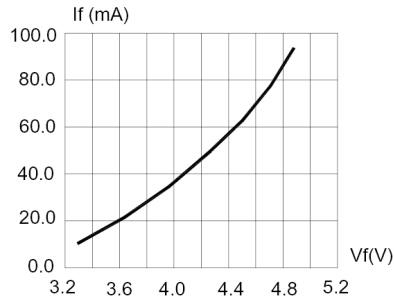


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

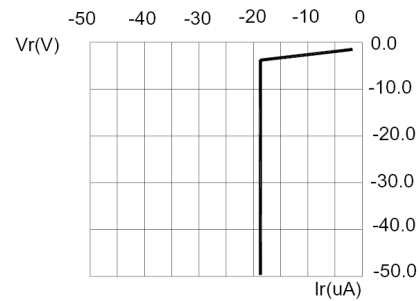


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

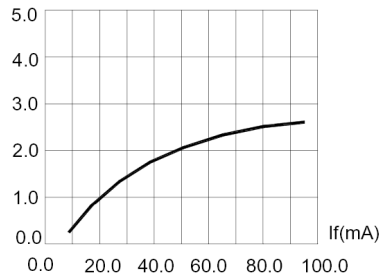


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

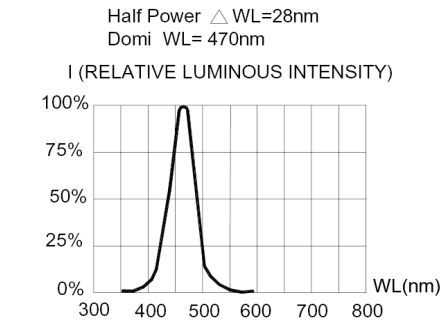


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

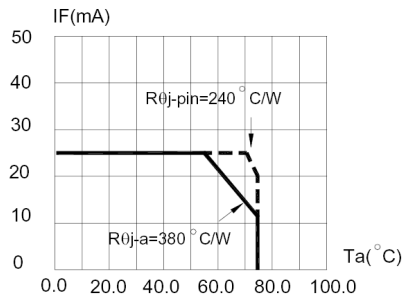


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ($T_{jmax}=95^{\circ}\text{C}$)

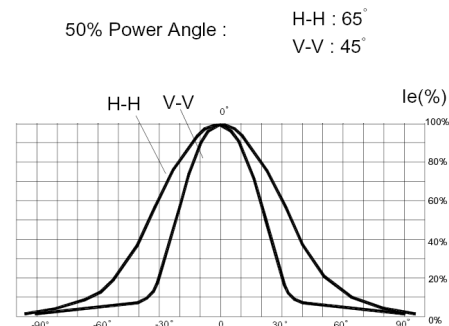


FIG.6 FAR FIELD PATTERN

1. Cathode PAD Area ($0.18 \times 0.18\text{inch}^2$)
2. Height above nominal seating plane in inches(0.3inch)