


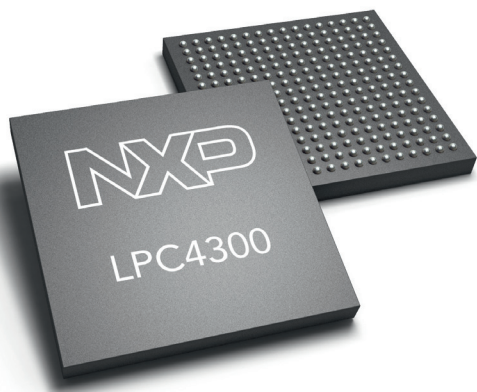

NXP 150 MHz, 32-bit
Cortex-M4 /Cortex-M0 DSC
LPC4300 series

First asymmetrical, dual-core digital signal controller featuring Cortex-M4 & Cortex-M0

A dual-core architecture and a unique set of configurable peripherals make it possible to develop DSP and MCU applications within a single architecture and development environment.

Key features

- ▶ 150 MHz, 32-bit ARM Cortex-M4
- ▶ 150 MHz, 32-bit ARM Cortex-M0 asymmetrical coprocessor
- ▶ Up to 1 MB Flash
- ▶ Up to 264 KB SRAM
- ▶ Memory Protection Unit (MPU)
- ▶ Two high-speed USB 2.0 interfaces, with on-chip high-speed PHY
- ▶ Ethernet MAC
- ▶ LCD Interface
- ▶ Innovative SPI Flash Interface
- ▶ State Configurable Timer Subsystem
- ▶ Configurable Serial GPIO
- ▶ Up to 146 GPIO

Additional features

- ▶ 8-channel GPDMA controller
- ▶ Two 8-channel, 10-bit ADCs and one 10-bit DAC (400 K samples per second)
- ▶ Motor Control PWM and Quadrature Encoder Interface
- ▶ Four UARTs, smart card interface
- ▶ Two Fast-mode I²C, two I²S, three SSP/SPI
- ▶ Temperature range: -40 to +85 °C

High Performance and Lower Power

Combined with large accelerated Flash and SRAM memories and a set of unique configurable peripherals, the 150 MHz LPC4300 enables customers to develop a wide range of applications such as motor control, power management, industrial automation, robotics, medical, automotive accessories and embedded audio.

Combining MCU and DSP capabilities

The Cortex-M4 processor combines the benefits of a microcontroller – integrated interrupt control, low power modes, low cost debug and ease of use – with high-performance digital signal processing features such as single-cycle MAC, single instruction multiple data (SIMD) techniques, saturating arithmetic, and a floating point unit. A Cortex-M0 coprocessor offloads many of the data movement and I/O handling duties that can drain the bandwidth of the Cortex-M4 core. This allows the Cortex-M4 to concentrate fully on crunching numbers for digital signal control applications.

Extensive peripheral set

The LPC4300 features three new innovative peripherals: a flexible SPI Flash Interface, a State Configurable Timer



subsystem and Serial GPIO. The State Configurable Timer Subsystem consists of a timer array with a state machine enabling complex functionality, including event-controlled PWM waveform generation, ADC synchronization, and dead-time control. The SPI Flash Interface provides a seamless high-speed memory-mapped connection to virtually all SPI and quad-SPI manufacturers. The LPC4300's Serial GPIO, available for the first time, allows a developer the flexibility to interface to any non-standard serial interface or to mimic multiple standard serial interfaces (such as I²S, TDM for multi-channel audio, I²C and more).

Additional peripherals available on the LPC4300 include two HS USB controllers, an on-chip HS PHY, a 10/100T Ethernet controller with hardware enabled TCP/IP checksum calculation, a high-resolution color LCD controller, and AES decryption, including two 128-bit secure OTP memories for key storage. Versions with AES encryption are available on request.



Type	Memory		M4/M0	LCD	Ethernet	USB	State Config Timer	Serial GPIO	External bus interface	Temp. range options	Package
	Flash	Ram									
LPC4310		168 KB	•				•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4312	512	104 KB	•				•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4313	256x2	104 KB	•				•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4315	768	136 KB	•				•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4317	1024	136 KB	•				•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4320		200 KB	•			1	•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4322	512	104 KB	•			1	•	•	8	-40 to +85 °C	LQFP144, TBGA100
LPC4323	256x2	104 KB	•			1	•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4325	768	136 KB	•			1	•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4327	1024	136 KB	•			1	•	•	8-16	-40 to +85 °C	LQFP144, TBGA100
LPC4330		264 KB	•		•	2	•	•	16-32	-40 to +85 °C	LQFP208, BGA256, BGA180
LPC4333	512	136 KB	•		•	2	•	•	16-32	-40 to +85 °C	LQFP208, BGA256, BGA180
LPC4337	1024	136 KB	•		•	2	•	•	16-32	-40 to +85 °C	LQFP208, BGA256, BGA180
LPC4350		264 KB	•	•	•	2	•	•	16-32	-40 to +85 °C	LQFP208, BGA256, BGA180
LPC4353	512	136 KB	•	•	•	2	•	•	16-32	-40 to +85 °C	LQFP208, BGA256, BGA180
LPC4357	1024 (2x512)	136 KB	•	•	•	2	•	•	16-32	-40 to +85 °C	LQFP208, BGA256, BGA180

www.nxp.com/microcontrollers