

LR1106

CMOS IC

LARGE CURRENT POSITIVE VOLTAGE REGULATORS



SOT-25



SOP-8

*Pb-free plating product number: LR1106L

■ DESCRIPTION

The UTC **LR1106** series are positive voltage regulators that developed in CMOS technology with highly precise, low power consumption. It is capable of large currents with a significantly small dropout voltage.

The device consists of a driver transistor, a precision reference voltage and an error amplifier. Basically, output voltage is selectable in 0.1V step form 1.8V to 6.0V, 2.85V also is available.

■ FEATURES

* Maximum Output Current : 400mA
* Maximum Operating Voltage : 8V
* Highly Accurate : ± 2%
* Low Power Consumption : TYP 8.0 μA
* Output Voltage Temperature Characteristics : TYP ±100ppm/°C

■ ORDERING INFORMATION

Order Number		Package	Pin Assignment								Packing
Normal	Lead Free Plating		1	2	3	4	5	6	7	8	
LR1106-xx-AF5-R	LR1106L-xx-AF5-R	SOT-25	I	G	E	N	O	-	-	-	Tape Reel
LR1106-xx-S08-R	LR1106L-xx-S08-R	SOP-8	O	N	G	N	E	N	N	I	Tape Reel
LR1106-xx-S08-T	LR1106L-xx-S08-T	SOP-8	O	N	G	N	E	N	N	I	Tube


Note: Pin Assignment: I:V_{IN} O:V_{OUT} G:GND N: No Connection E: Enable
xx: Output Voltage, refer to Marking Information.

LR1106L-xx-AF5-R


(1)Packing Type	(1) R: Tape Reel, T: Tube
(2)Package Type	(2) AF5: SOT-25, S08: SOP-8
(3)Output Voltage Code	(3) xx: refer to Marking Information
(4)Lead Plating	(4) L: Lead Free Plating Blank: Pb/Sn

Copyright © 2005 Unisonic Technologies Co., Ltd


■ MARKING INFORMATION

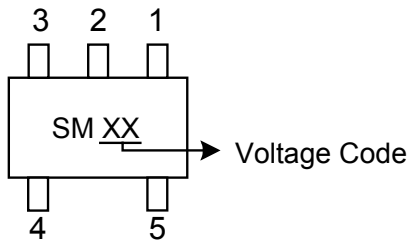PACKAGE	VOLTAGE CODE	MARKING
SOT-25	18:1.8V 22:2.2V 25:2.5V 27:2.7V 28:2.8V 2J:2.85V 30:3.0V 31:3.1V 33:3.3V 35:3.5V 50:5.0V	

■ BLOCK DIAGRAM

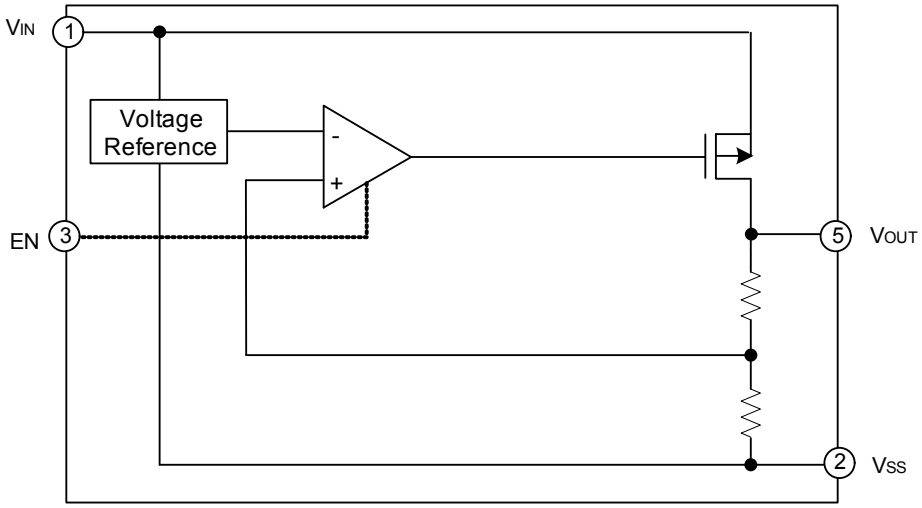

For SOT-25 Package

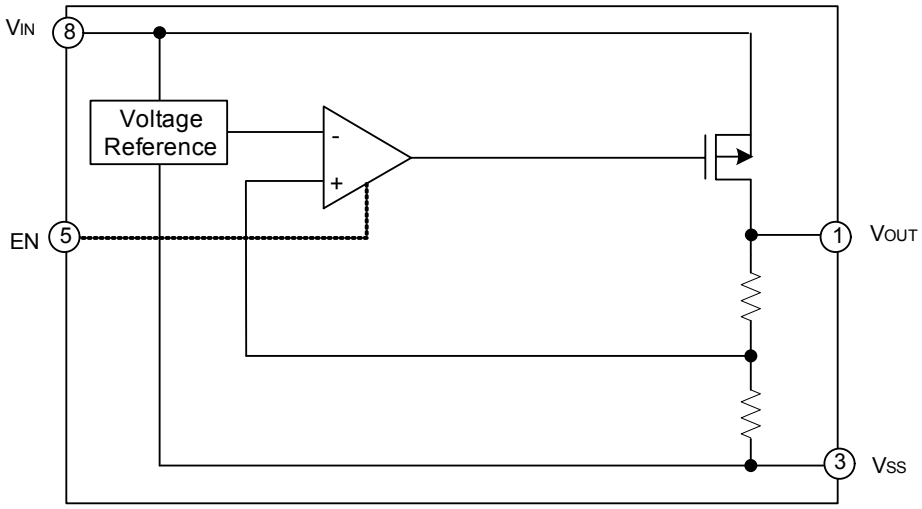

For SOP-8 Package

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	12	V
Output Voltage	V_{OUT}	V_{SS} -0.3 ~ V_{IN}+0.3	V
Output Current	I_{OUT}	500	mA
Power Dissipation	P_D	300	mW
Operating Ambient Temperature	T_{OPR}	-40 ~ +85	°C
Storage Temperature	T_{STG}	-40 ~ +125	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified.)

For LR1106-18

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=2.8V, I_{OUT}=40mA	1.764	1.800	1.836	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=2.8V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		200	300	mV
	V_{D2}	I_{OUT}=200mA		400	600	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=2.8V, V_{OUT}≥V_{OUT}× 0.90	400			mA
Supply Current	I_{SS}	V_{IN}=2.8V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=2.8V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 2.8V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

For LR1106-22

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.2V, I_{OUT}=40mA	2.156	2.200	2.244	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=3.2V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		200	300	mV
	V_{D2}	I_{OUT}=200mA		400	600	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=3.2V, V_{OUT}≥V_{OUT}× 0.90	400			mA
Supply Current	I_{SS}	V_{IN}=3.2V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=3.2V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 3.2V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LR1106-25

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.5V, I_{OUT}=40mA	2.450	2.500	2.550	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=3.5V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		170	250	mV
	V_{D2}	I_{OUT}=200mA		320	500	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=3.5V, V_{OUT}≥V_{OUT}× 0.93	400			mA
Supply Current	I_{SS}	V_{IN}=3.5V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=3.5V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 3.5V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

For LR1106-27

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.7V, I_{OUT}=40mA	2.646	2.700	2.754	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=3.7V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		170	250	mV
	V_{D2}	I_{OUT}=200mA		320	500	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=3.7V, V_{OUT}≥V_{OUT}× 0.93	400			mA
Supply Current	I_{SS}	V_{IN}=3.7V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=3.7V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 3.7V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

For LR1106-28

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.8V, I_{OUT}=40mA	2.744	2.800	2.856	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=3.8V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		170	250	mV
	V_{D2}	I_{OUT}=200mA		320	500	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=3.8V, V_{OUT}≥V_{OUT}× 0.93	400			mA
Supply Current	I_{SS}	V_{IN}=3.8V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=3.8V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 3.8V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LR1106-2J(2.85V)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.85V, I_{OUT}=40mA	2.793	2.850	2.907	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=3.85V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		170	250	mV
	V_{D2}	I_{OUT}=200mA		250	500	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=3.85V, V_{OUT}≥V_{OUT}× 0.93	400			mA
Supply Current	I_{SS}	V_{IN}=3.85V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=3.85 to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 3.85V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

For LR1106-30

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=4.0V, I_{OUT}=40mA	2.940	3.000	3.060	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=4.0V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		150	220	mV
	V_{D2}	I_{OUT}=200mA		300	420	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=4.0V, V_{OUT}≥V_{OUT}× 0.96	400			mA
Supply Current	I_{SS}	V_{IN}=4.0V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=4.0V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 4V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

For LR1106-31

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=4.1V, I_{OUT}=40mA	3.038	3.100	3.162	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=4.1V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		150	220	mV
	V_{D2}	I_{OUT}=200mA		300	420	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=4.1V, V_{OUT}≥V_{OUT}× 0.96	400			mA
Supply Current	I_{SS}	V_{IN}=4.1V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=4.1V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 4V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)


For LR1106-33

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=4.3V, I_{OUT}=40mA	3.234	3.300	3.366	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=4.3V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		150	220	mV
	V_{D2}	I_{OUT}=200mA		300	420	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=4.3V, V_{OUT}≥V_{OUT}× 0.96	400			mA
Supply Current	I_{SS}	V_{IN}=4.3V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=4.3V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 4.3V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C

For LR1106-50

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=6.0V, I_{OUT}=40mA	4.900	5.000	5.100	V
Input Voltage	V_{IN}				8	V
Load Regulation	ΔV_{OUT}	V_{IN}=6.0V, 1mA≤I_{OUT}≤200mA		40	100	mV
Dropout Voltage	V_{D1}	I_{OUT}=100mA		100	180	mV
	V_{D2}	I_{OUT}=200mA		200	320	
Maximum Output Current	$I_{OUT(MAX)}$	V_{IN}=6.0V, V_{OUT}≥V_{OUT}× 0.96	400			mA
Supply Current	I_{SS}	V_{IN}=6.0V, V_{EN}=V_{IN}		30.0	50.0	μA
EN Input Bias Current	I_{EH}	V_{EN}=V_{IN}			0.1	μA
	I_{EL}	V_{EN}=0, V_{IN}=6.0V to 8V		1.0	3.0	μA
EN Input Threshold	V_{EH}	V_{IN}=2.6V to 7V	V_{IN}/2+0.8		V_{IN}	V
	V_{EL}	V_{IN}=2.6V to 7V	0		0.4	V
Line Regulation	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times\triangle V_{OUT}}$	I_{OUT}=40mA, 6.0V≤V_{IN}≤8.0V		0.2	0.5	%/V
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA		±100		ppm/°C


■ TYPICAL APPLICATION CIRCUIT

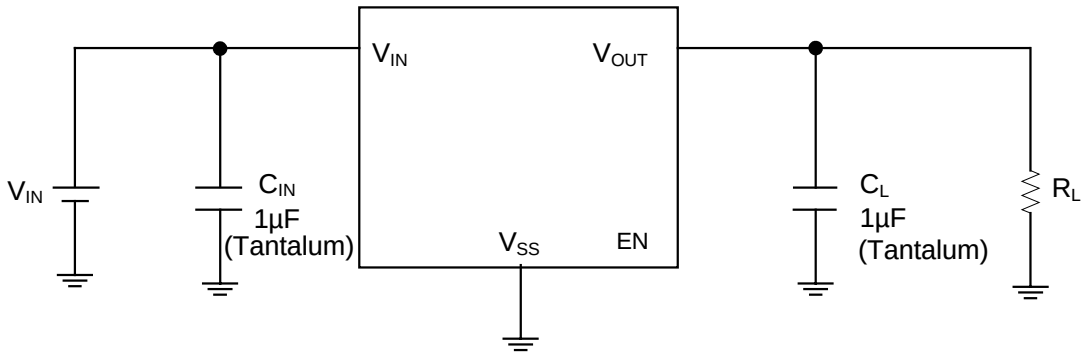


■ TYPICAL CHARACTERISTICS

(1) LR1106-18


Output Voltage vs. Output Current

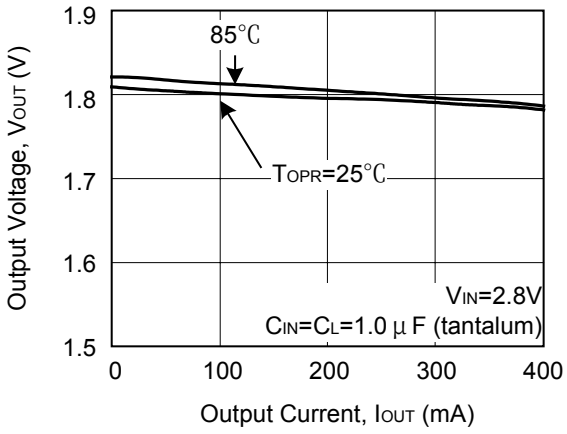


Output Voltage vs. Input Voltage

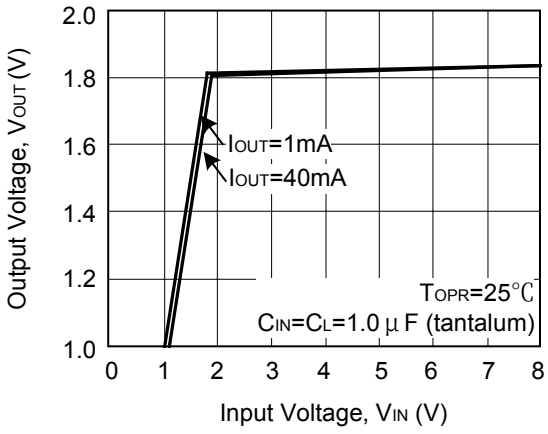


Dropout Voltage vs. Output Current

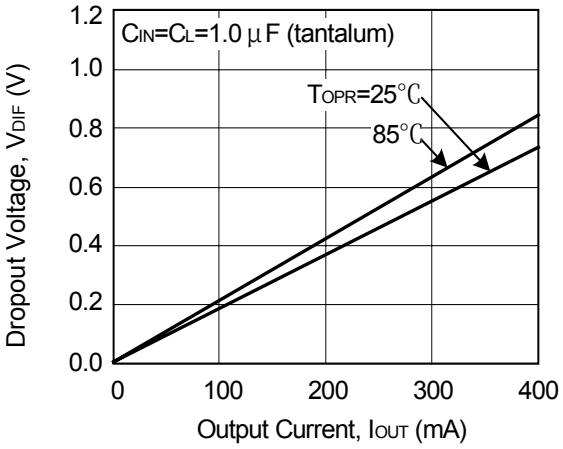


Supply Current vs. Input Voltage

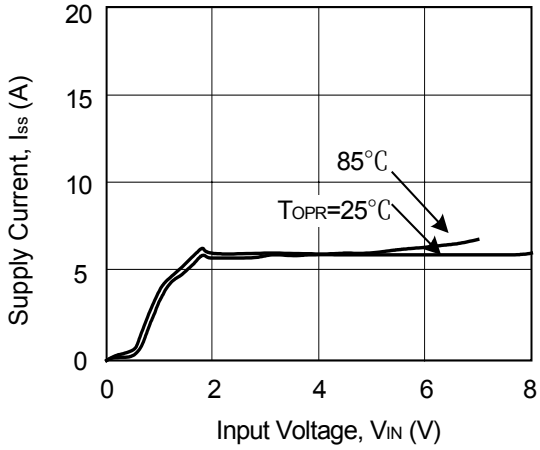

Output Voltage vs Ambient Temperature

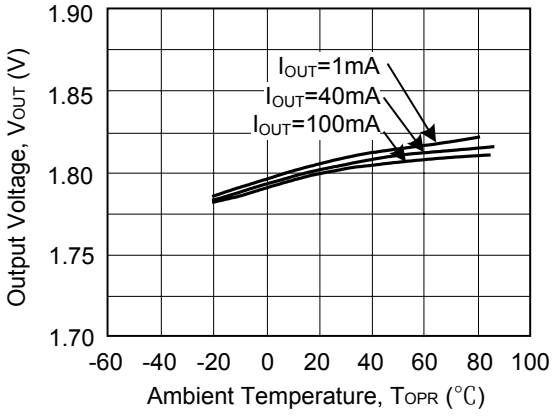


Supply Current vs Ambient Temperature

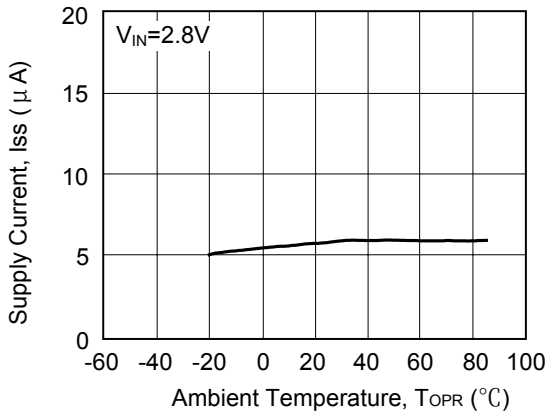


■ TYPICAL CHARACTERISTICS (Cont.)


Input Transient Response

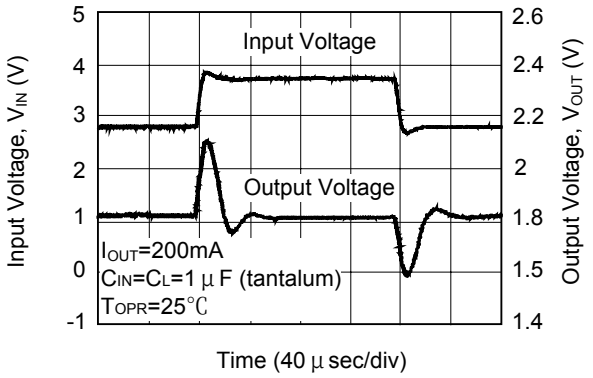


Load Transient Response

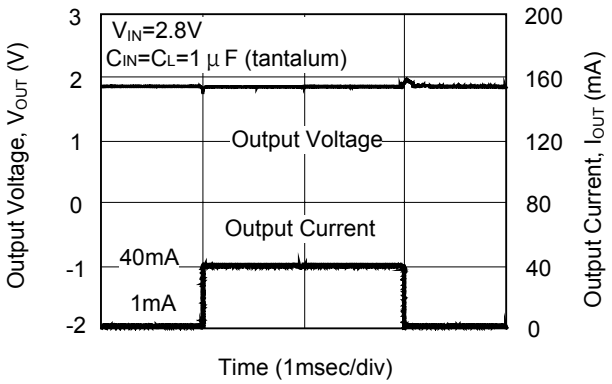


Load Transient Response

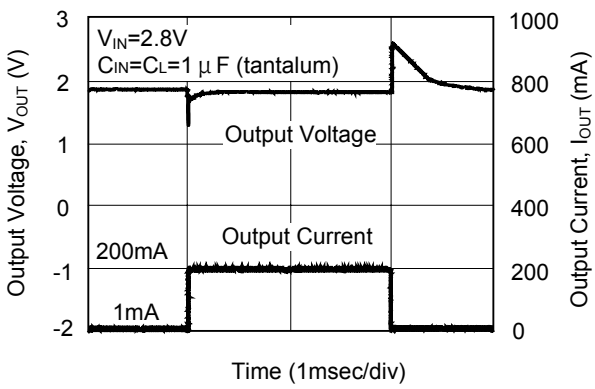

Ripple Rejection Rate

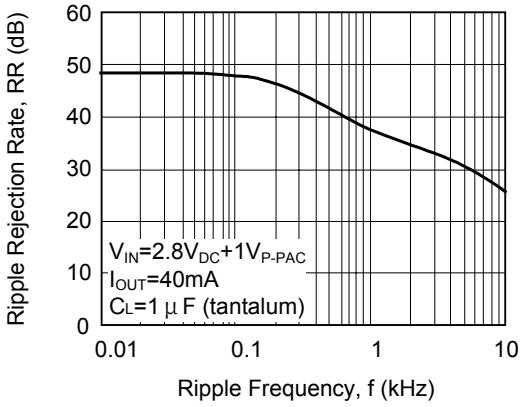


Ripple Rejection Rate

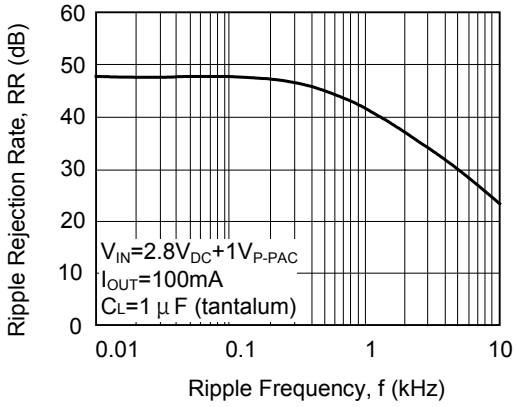


■ TYPICAL CHARACTERISTICS (Cont.)

(2) LR1106-25


Output Voltage vs Output Current

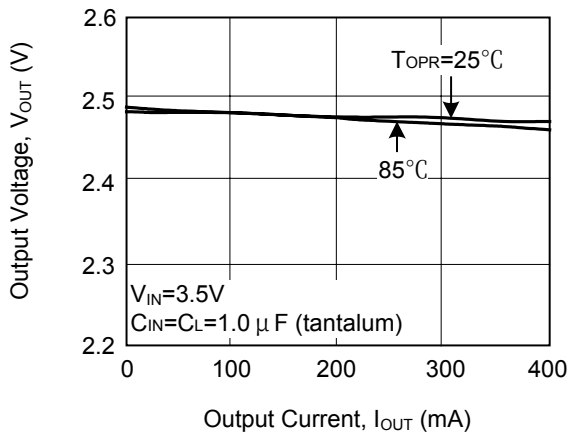


Output Voltage vs Input Voltage

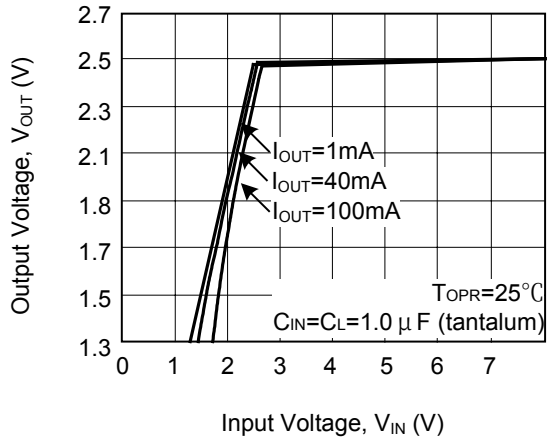


Dropout Voltage vs Output Current

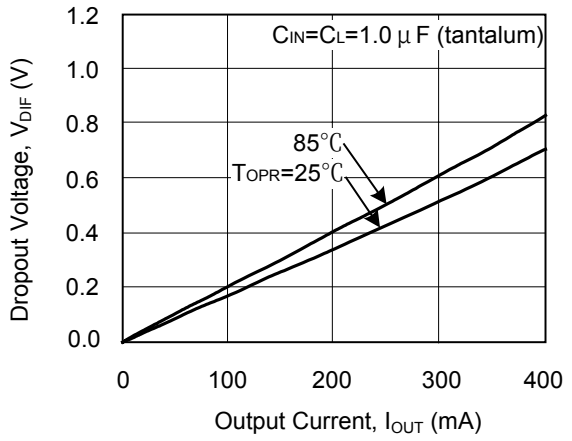


Supply Current vs Input Voltage

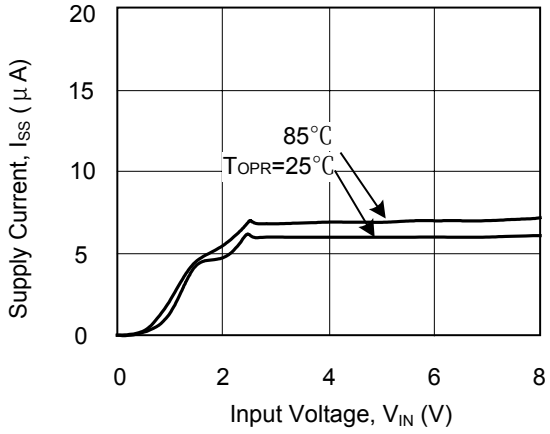

Output Voltage vs Ambient Temperature

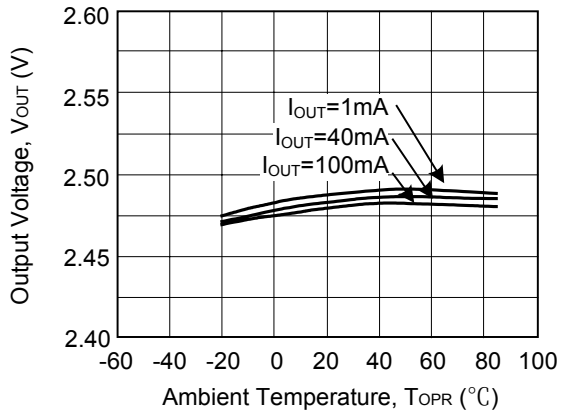


Supply Current vs Ambient Temperature

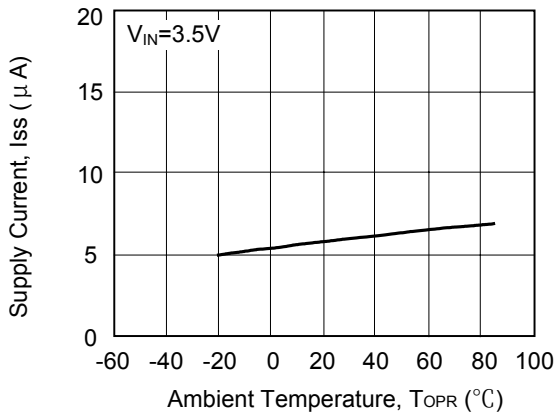


■ TYPICAL CHARACTERISTICS (Cont.)


Input Transient Response

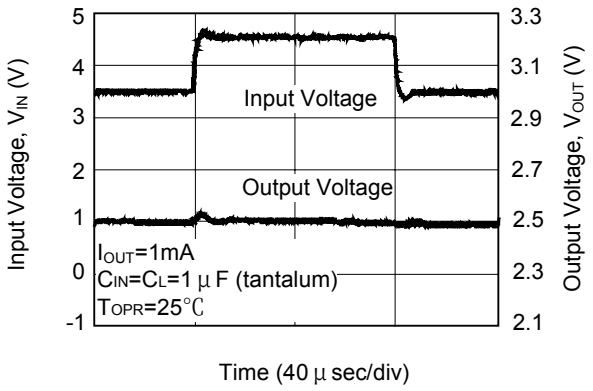


Input Transient Response

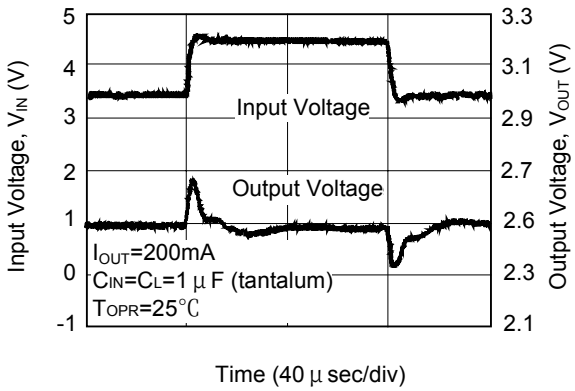


Load Transient Response

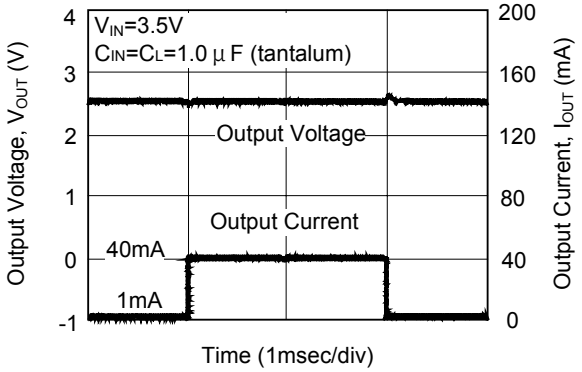


Load Transient Response

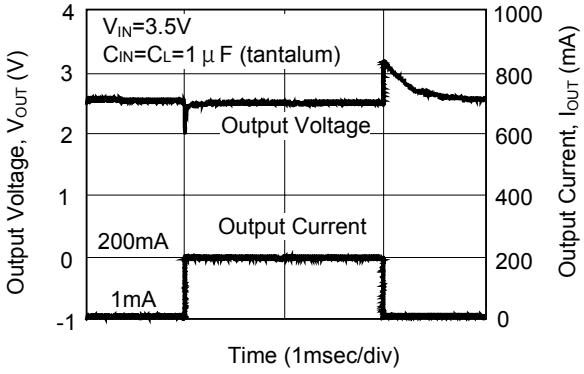

Ripple Rejection Rate

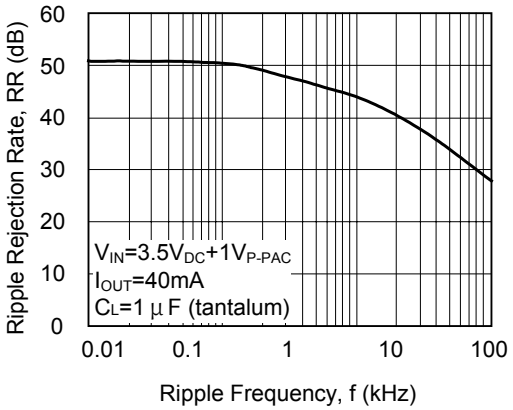


Ripple Rejection Rate

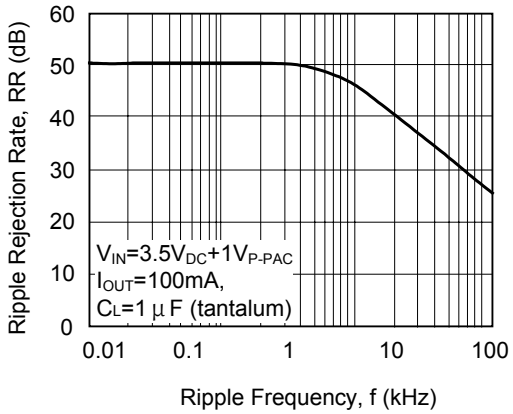


■ TYPICAL CHARACTERISTICS (Cont.)

(3) LR1106-33


Output Voltage vs Output Current

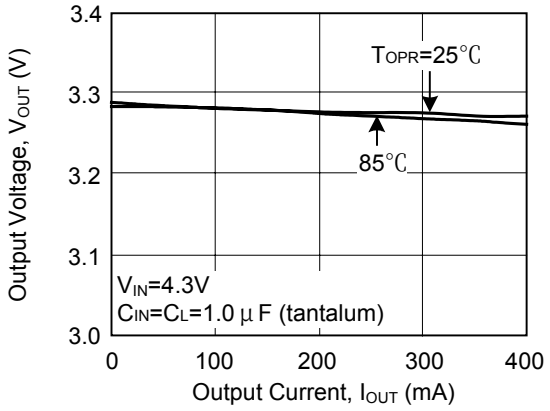


Output Voltage vs Input Voltage

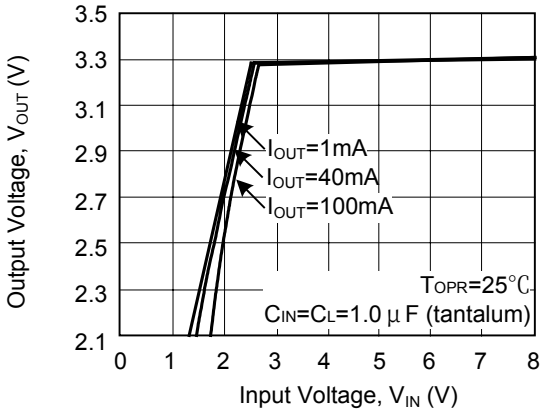


Dropout Voltage vs Output Current

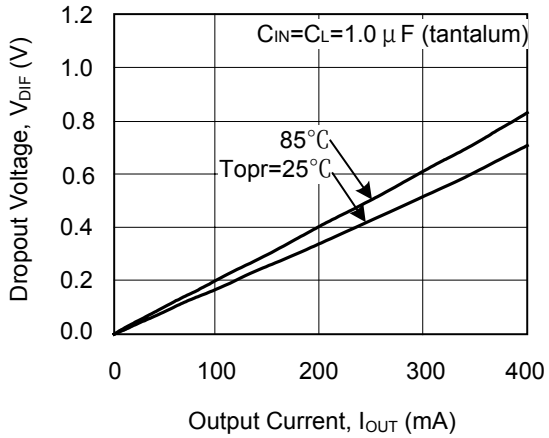


Supply Current vs Input Voltage

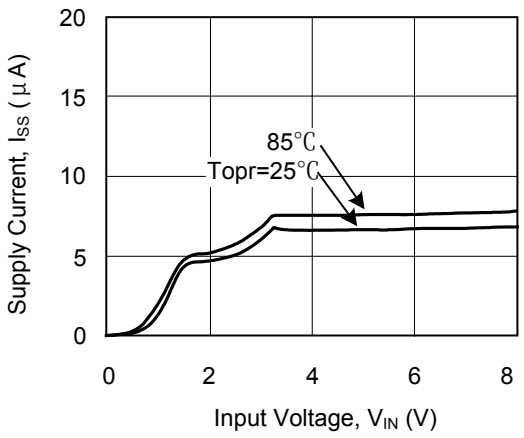

Output Voltage vs Ambient Temperature

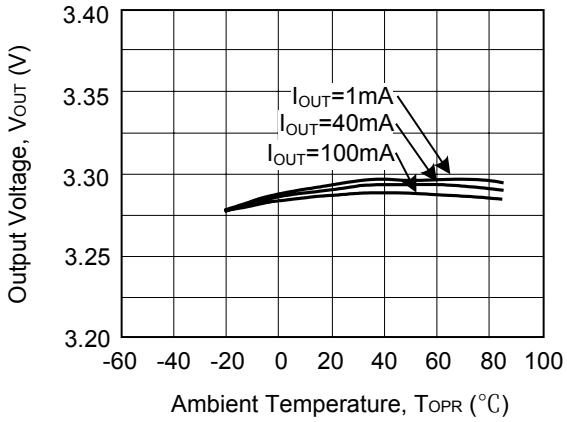


Supply Current vs Ambient Temperature

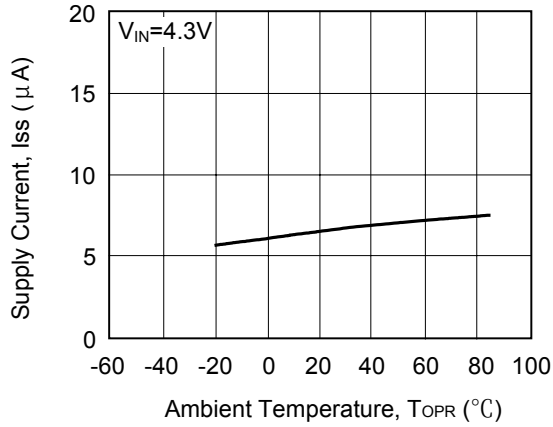


■ TYPICAL CHARACTERISTICS (Cont.)


Input Transient Response

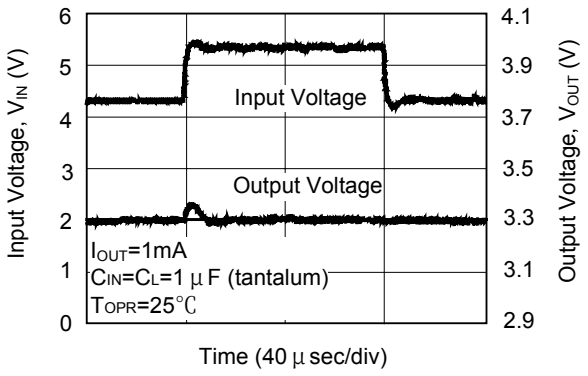


Input Transient Response

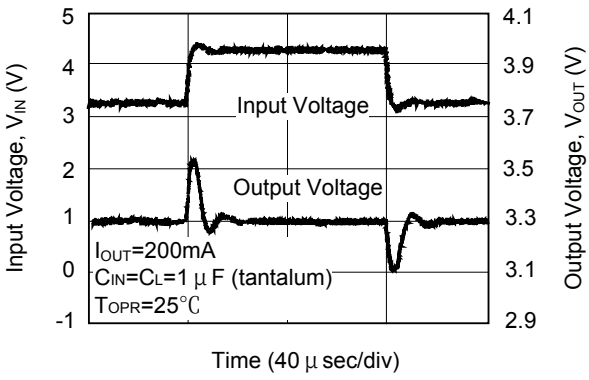


Load Transient Response

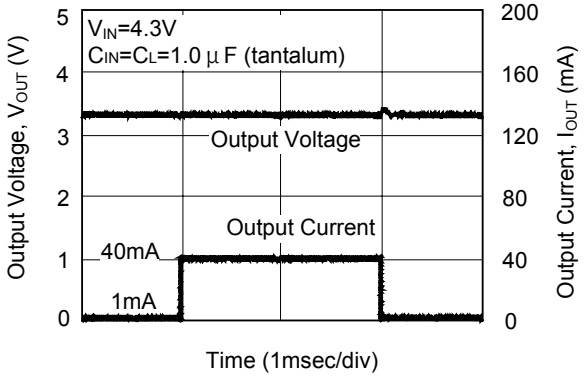


Load Transient Response

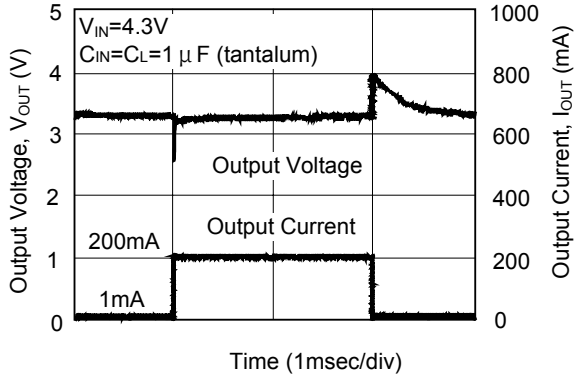

Ripple Rejection Rate

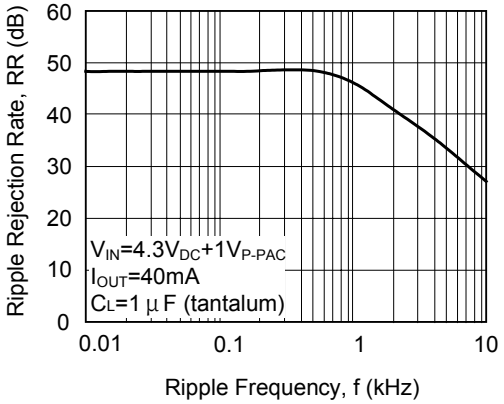


Ripple Rejection Rate

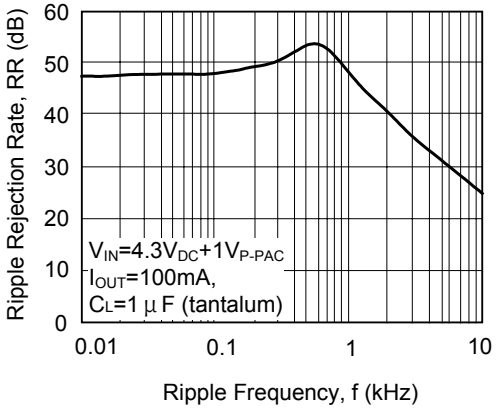


■ TYPICAL CHARACTERISTICS (Cont.)

(4) LR1106-50


Output Voltage vs Output Current

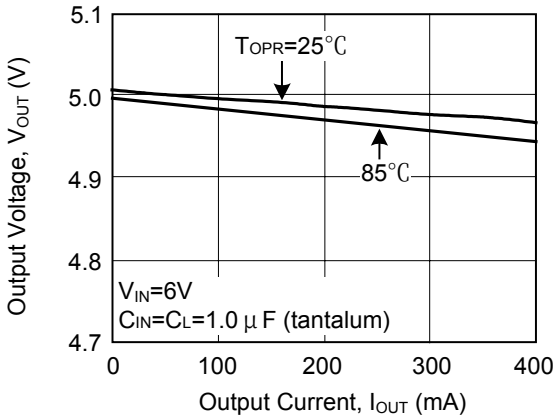


Output Voltage vs Inpent Voltage

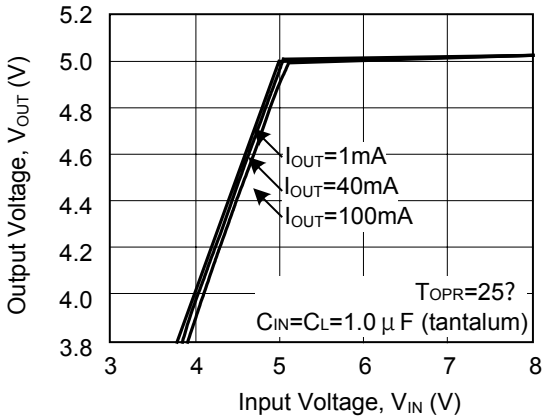


Dropout Voltage vs Output Current

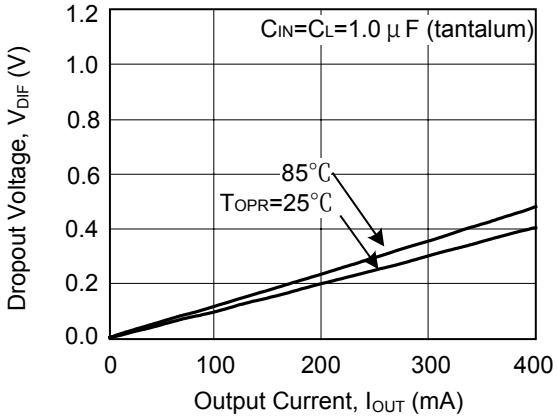


Supply Current vs Input Voltage

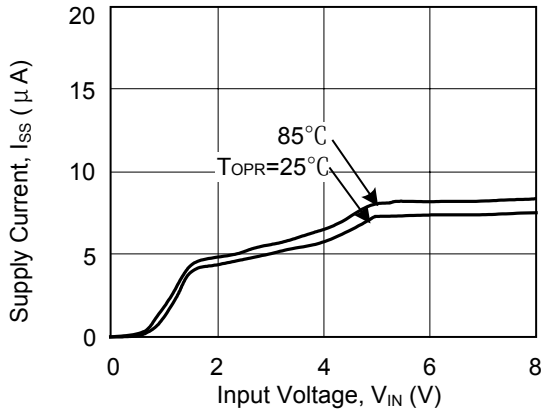

Output Voltage vs Ambient Temperature

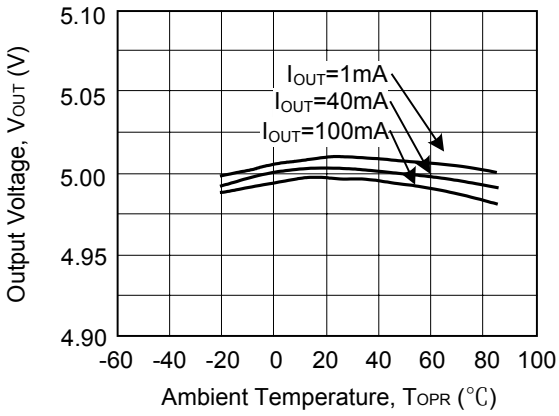


Supply Current vs Ambient Temperature

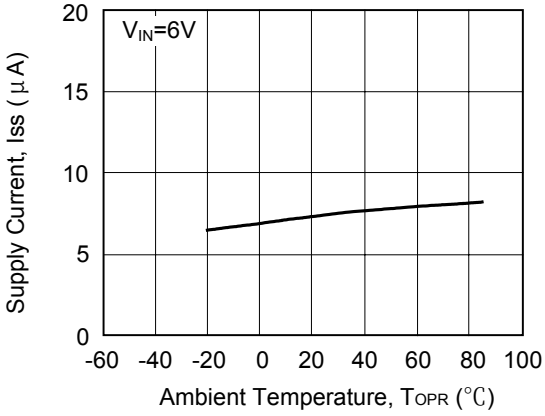


■ TYPICAL CHARACTERISTICS (Cont.)


Input Transient Response

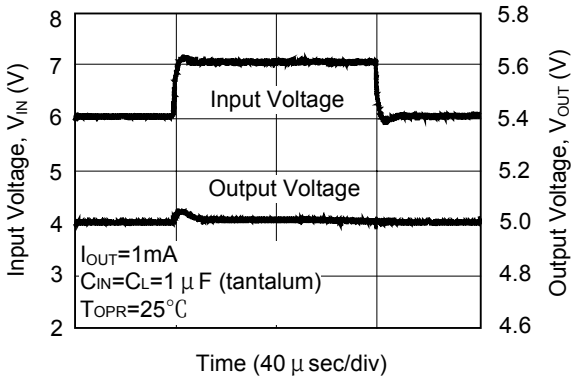


Input Transient Response

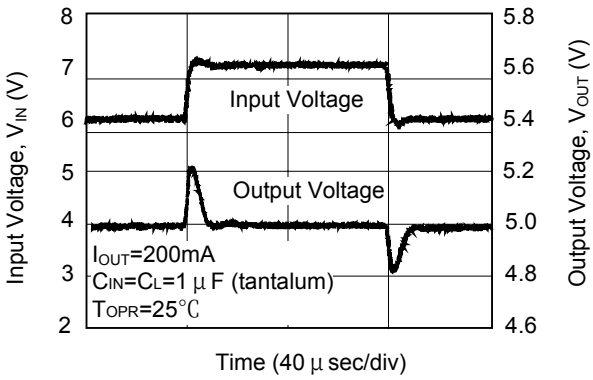


Load Transient Response

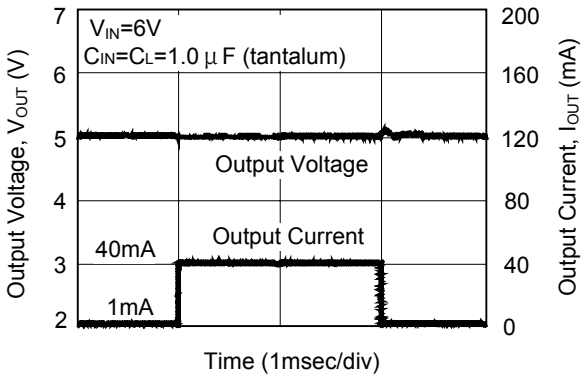


Load Transient Response

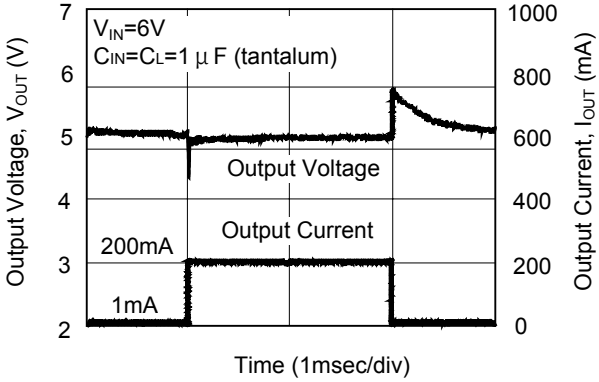

Ripple Rejection Rate

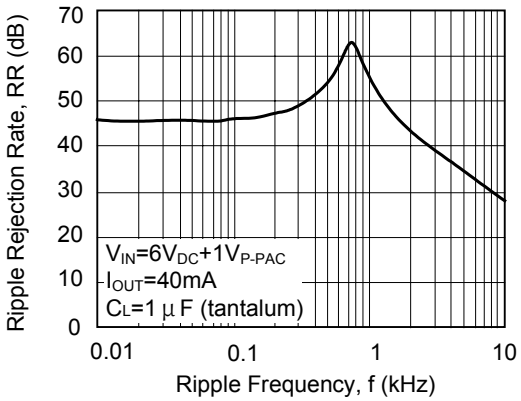

Ripple Rejection Rate

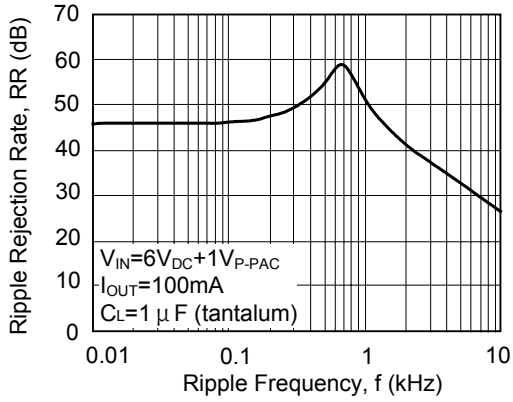

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.