T1/E1/CEPT/ISDN-PRI TRANSFORMER

LANKom Electronics Co., Ltd.
連 康 電 子 股 份 有 限 公 司

Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms

Turns Ratio: (1–2):(3–4):(5–6) = 1:1:1 ±5%

Pri. OCL: 1.2mH Min. @100KHz 50mV


Leakage Inductance: 0.50uH Max. @100KHz 50mV

Cw/w: 25pF Max.


Pri. DCR: 0.70 Ohms Max

Sec. DCR: 0.70 Ohms Max.

Mechanicals

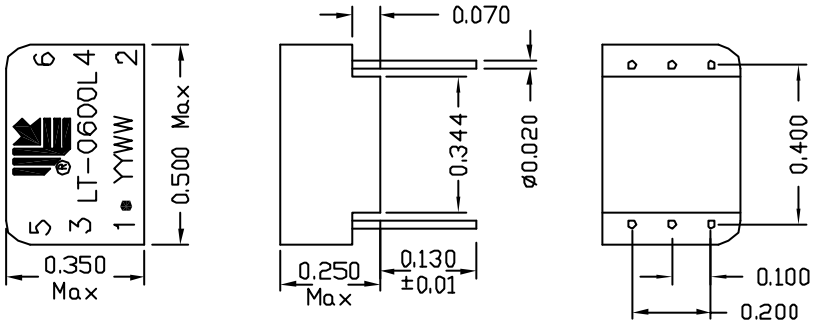

Schematics:

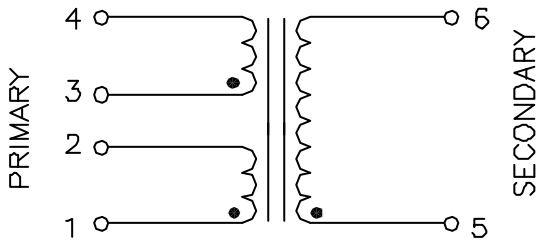

Specification subject to change without notice

P/N: LT-0600L	DIMENSIONS IN INCH	Unless otherwise specified Dim. Tolerances are: .xxx ±0.010	REV: B1	DRWN: DATE: 03/07/25
	SCALE: NONE		PAGE:1/1	APPD: DATE:

LANKom Electronics Co., Ltd. • TEL: 886-2-6606-9777 • FAX: 886-2-6606-9555 • E-mail: sales@lankom.com.tw