Model:LTC225



Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight, high efficiency,low noise,wide application,lead type output.
Primary working voltage:230V(Can be customized according to customer's requirements)

Technical index:


Installation method:Sub-plate mount
Flame resistance:UL94-V0
Insulation class:B grade
Work temperature:-30℃～+40℃
Frequency range:50Hz～60Hz
Dielectric strength:P/S：4.5KV AC

Electrical data:


Primary working voltage	230	V
Output power	225	VA
No-load loss	16.5	W
Weight		g

Secondary voltage	Secondary no load voltage	Secondary full load current
12V×2	13.1V×2	9.38A×2
15V×2	16.5V×2	7.50A×2
18V×2	19.7V×2	6.25A×2
22V×2	24.2V×2	5.11A×2
30V×2	32.8V×2	3.75A×2
55V×2	60V×2	2.05A×2


Connection diagram:

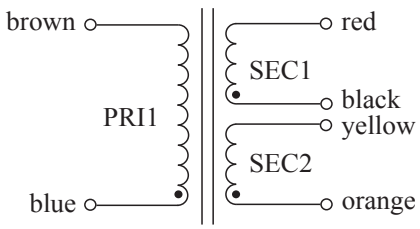

Dimension(mm):

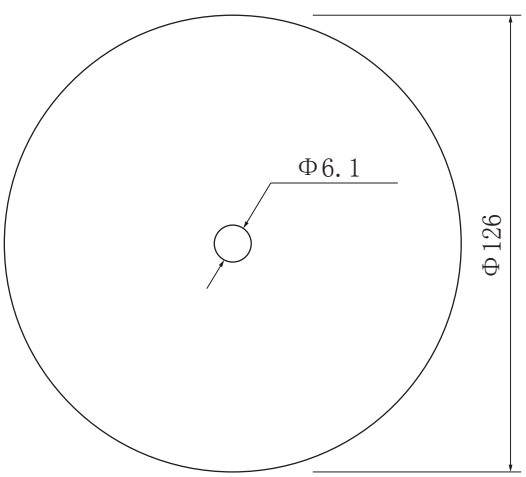

Front View

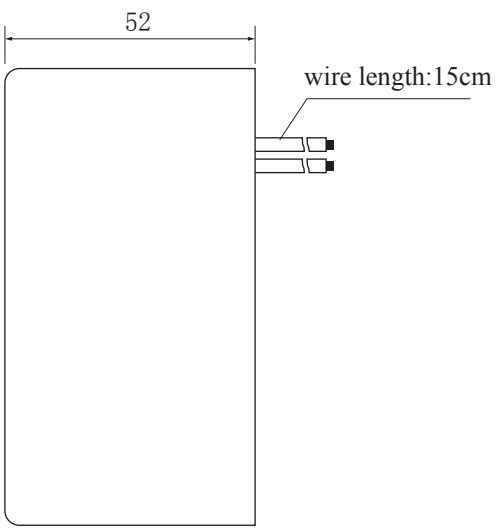

Side View