




FEATURES

- Cispr 22' B' , Vcci' B' , Fcc' B' Compliance
- Light Weight: 140g only
- Efficiency 71%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40

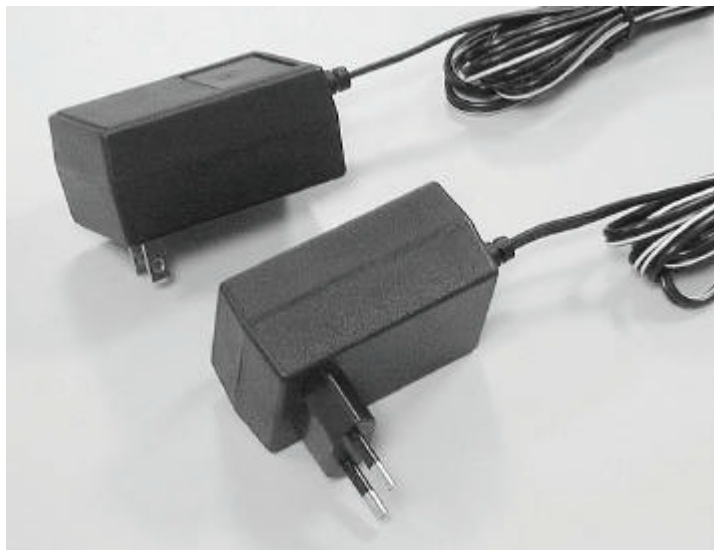

SPECIFICATION

Model		* M2-10US05	* M2-12US05	* M2-15US05
Item				
Output Voltage		5V	5V	5V
Output Current		2.0A	2.5A	3.0A
Input Voltage		AC 90~264V		
Input Frequency		47~63Hz		
Input Current		0.6A Maximum		
Inrush Current		50A Maximum		
Line Regulation		2% Maximum		
Load Regulation		±5%		
Ripple & Noise		1% Maximum		
Efficiency		71% Typical		
Temperature Coefficient		0.05%/		
Over-Voltage Protection		10V Maximum		
Operating Temperature		0~40		
Storage Temperature		-20~85		
Safety Description	Fig. A	---		
	Fig. B	---		
	Fig. C	---		
	Fig. D	---		
	Fig. E	---		

(*): Under Development (/P): In Process



M2 Series 10-15 Watt


Bothhandusa.com

ORDERING INFORMATION

M2- 15 US 05 - A - 1 A

Output Plug List
Mechanical
Output Voltage
Output Watts

MECHANICAL

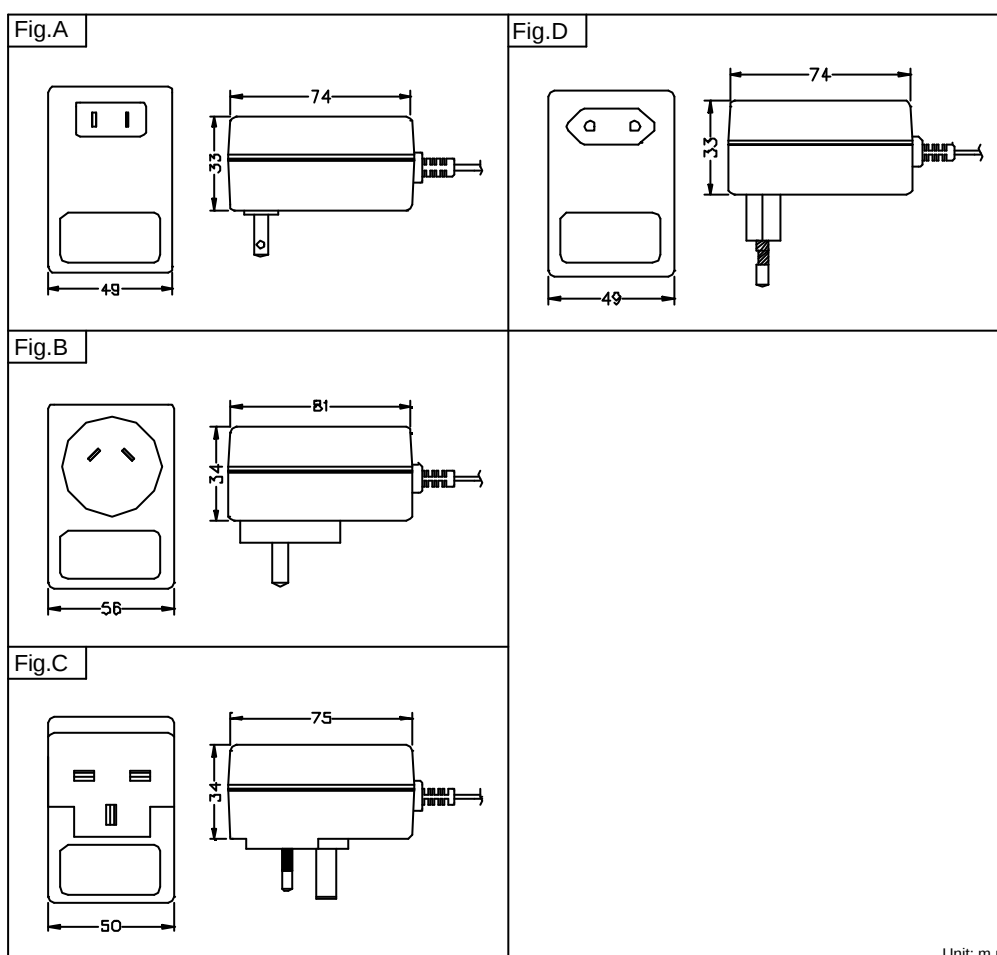

Unit: m.m.

Standard Output Cable:
5V: 18AWG, UL SPT-1, 1800mm