tyco Electronics

M/ACOM

Double-Balanced Mixer

M2G/M2GC
V2


Features

- LO 800 TO 3500 MHz
- RF 1000 TO 2200 MHz
- IF DC TO 1500 MHz
- LO DRIVE +7 dBm (nominal)
- HIGH ISOLATION 30 dB (TYP.)

Description

The M2G is a double balanced mixer, designed for use in military, commercial, and test equipment applications. The design utilizes Schottky ring quad diodes and broadband ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. Environmental screening is available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image

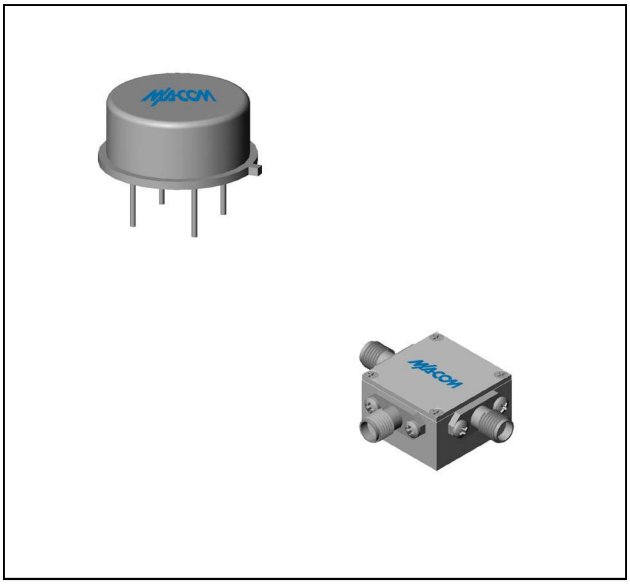

Ordering Information

Part Number	Package
M2G	TO-8
M2GC	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +7 dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25ºC	-54º to +85ºC *
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 1000 to 2200 MHz, fL =800 to 3500 MHz, fI =10 to 1500 MHz	dB	8.0	9.5	10.0
Isolation, L to R (min)	fL = 800 to 2000 MHz fL = 2000 to 3000 MHz fL = 3000 to 3500 MHz	dB dB dB	40 25 20	25 20 17	23 18 18
Isolation, L to I (min)	fL = 800 to 3500 MHz	dB	25	20	18
1 dB Conversion Comp.					
Input IP3					

* The M2GC specification limits apply at 0ºC to +50ºC.


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298


Visit www.macom.com for additional data sheets and product information.


Typical Performance Curves

Conversion Loss

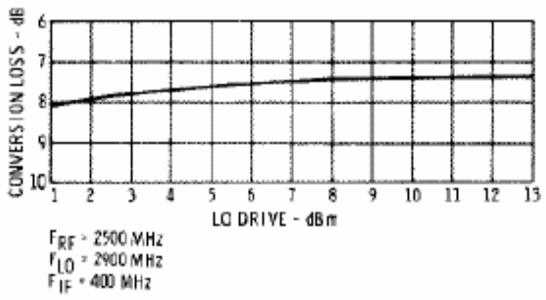


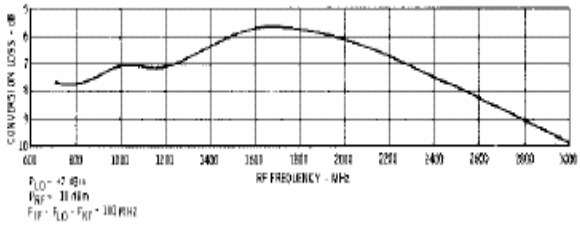

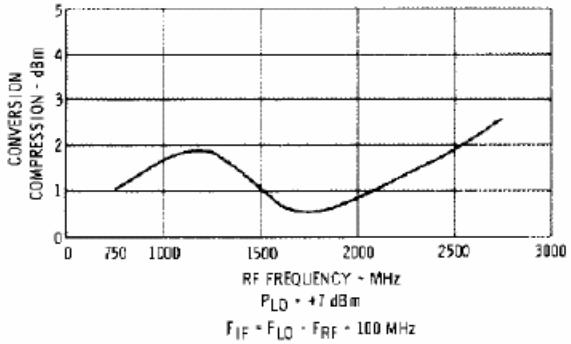


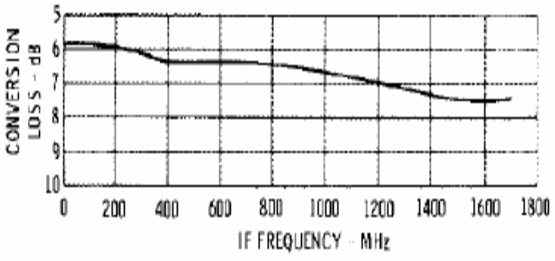


Isolation

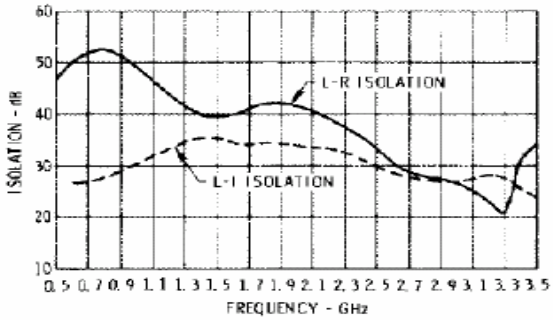

VSWR

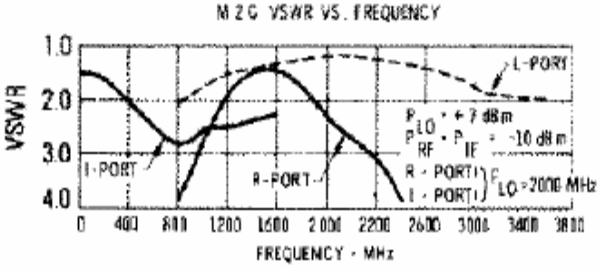

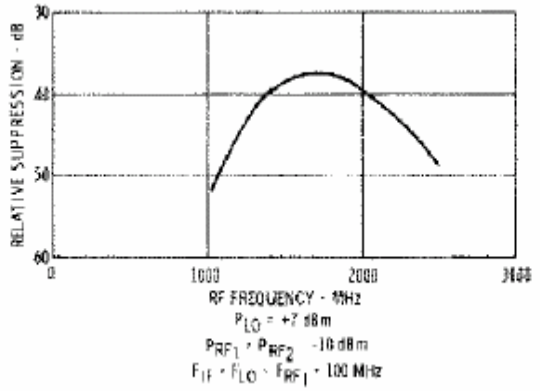

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

Absolute Maximum Ratings


Parameter	Absolute Maximum
Operating Temperature	-54ºC to +100ºC
Storage Temperature	-65ºC to +100ºC
Peak Input Power	+23 dBm max @ +25ºC +17 dBm max @ +100ºC
Peak Input Current	50 mA DC

Outline Drawing: TO-8 *

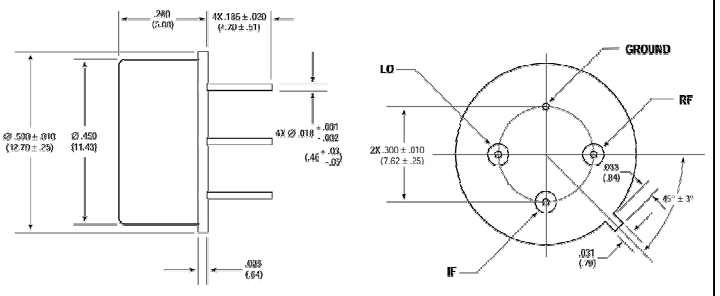

Weight: 2 grams (0.07 oz.) max

Outline Drawing: SMA Connectorized *

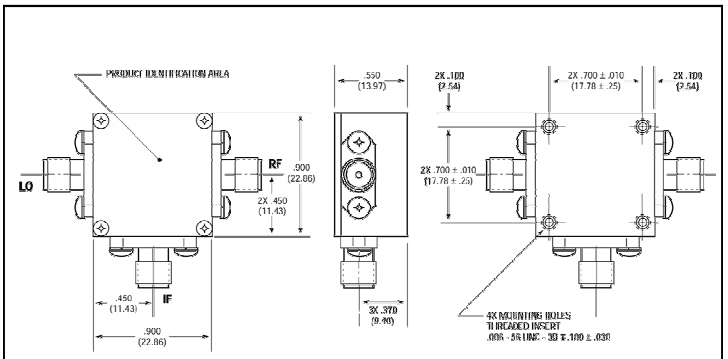

Weight: 21 grams (0.74 oz.) max

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.