





PANEL THICKNESS	X dimension
0.75-1.25 [0.030-.049]	19.2- <i>o1</i> [7.56]
1.25-2.0 [0.049-.079]	19.4- <i>o1</i> [7.64]
2.0-3.0 [0.079-.118]	19.8- <i>o1</i> [7.80]

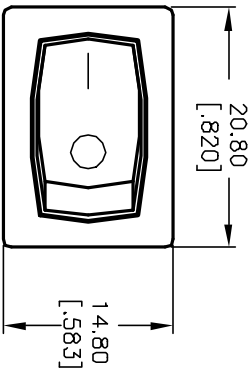

PANEL CUTOOUT
NOT TO SCALE

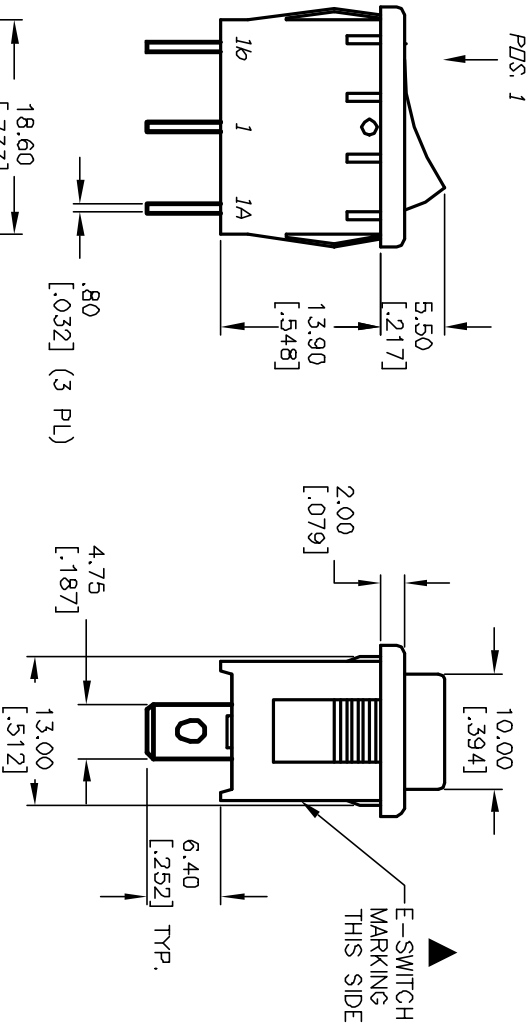


SWITCH FUNCTION	
$PDS, 1$	$PDS, 3$
DN	$\langle DN \rangle$
$1a-1$	$1-1b$



CIRCUIT: SPD

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 15A @ 125VAC OR
6A @ 250VAC
5. MATERIALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: $< 20 \text{ Mega } \Omega$
8. INSULATION RESISTANCE: $> 1000 \text{ Mega } \Omega$
9. DIELECTRIC STRENGTH: $> 1500 \text{ V } 1 \text{ minute}$
 $> 3000 \text{ V between poles}$

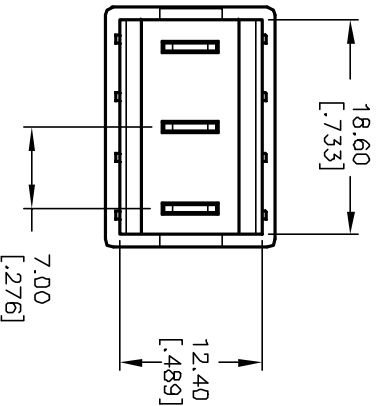

					TITLE				
					R1966G BLK BLK FF				
A	12426		9/16/02	CJB	SCALE	DATE	DR	DWG	REV
REV.	ECN NO.		DATE	CHKD	1.5:1	9/16/02	CJB	M304213	A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									