

M320x Series

9x14 mm, 3.3/2.5/1.8 Volt, PECL/LVDS/CML, VCXO



- Featuring *QiK Chip™* Technology
- Superior Jitter Performance (comparable to SAW based)
- APR of ± 50 or ± 100 ppm over industrial temperature range
- Frequencies from 150 MHz to 1.4 GHz
- Designed for a short 2 week cycle time



Phase Lock Loop Applications:

- Telecommunications such as SONET / SDH / DWDM / FEC / SERDES / OC-3 thru OC-192
- Wireless base stations / WLAN / Gigabit Ethernet
- Avionic flight controls and military communications

Ordering Information

	M320	0	6	A	G	P	J	00.0000	MHz
Product Series									
Supply Voltage									
0: 3.3 V									
1: 2.5 V									
2: 1.8 V									
Temperature Range									
2: -40°C to +85°C (see note 1)									
6: -20°C to +70°C									
Absolute Pull Range (APR)									
A: ± 50 ppm									
B: ± 100 ppm									
Enable/Disable									
G: Complementary Enable High (Pad 2)									
M: Complementary Enable Low (Pad 2)									
U: Complementary Output									
Logic Type									
P: PECL									
L: LVDS									
M: CML									
Package/Lead Configuration									
J: 9x14 mm J-lead									
Frequency (customer specified)									

Pin1: Voltage Control
 Pin2: Enable/Disable (or N/C)
 Pin3: Ground
 Pin4: Output Q (PECL, LVDS, CML)
 Pin5: Output $\bar{Q}$ (PECL, LVDS, CML)
 Pin6: Vcc

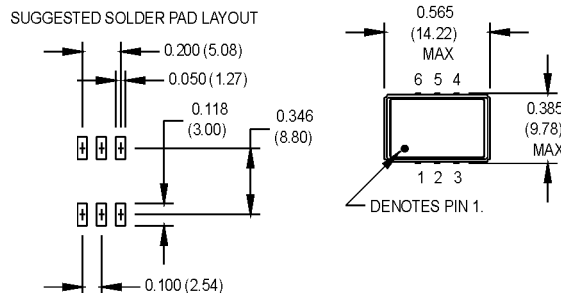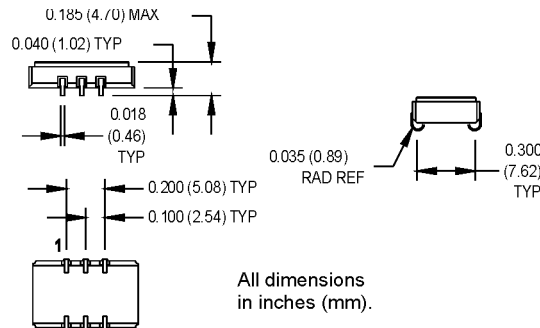

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

Revision: 11-21-06

M320x Series

9x14 mm, 3.3/2.5/1.8 Volt, PECL/LVDS/CML, VCXO




PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	150		1400	MHz	See Note 2
Operating Temperature	T _A	(See ordering information)				See Note 1
Storage Temperature	T _S	-55		+125	°C	
Frequency Stability	ΔF/F		±25		ppm	
Aging 1st Year Thereafter (per year)		-3 -1		+3 +1	ppm ppm	
Pullability/APR		(See ordering information)				See Note 3
Control Voltage	V _c	0.18 0.25 0.30	0.90 1.25 1.65	1.62 2.25 3.0	V V V	@ 1.8V V _{cc} @ 2.5V V _{cc} @ 3.3V V _{cc}
Linearity			1	5	%	Positive Monotonic
Modulation Bandwidth	f _m	20			KHz	-3 dB bandwidth
Input Impedance	Z _{in}	500k	1M		Ohms	@ DC
Supply Voltage	V _{cc}	1.71	1.8	1.89	V	
		2.375	2.5	2.625	V	
		3.135	3.3	3.465	V	
Input Current	I _{cc}			125	mA	PECL/LVDS/CML
Load		50 Ohms to (V _{cc} - 2) V _{dc} 100 Ohm differential load				See Note 4 PECL Waveform LVDS/CML Waveform
Symmetry (Duty Cycle)		45		55	%	@ 50% of waveform
Output Skew			TBD			
Differential Voltage		350	425 TBD	500	mVppd	LVDS CML
Common Mode Output Voltage	V _{cm}		1.2		V	LVDS
Logic "1" Level	V _{oh}	V _{cc} - 1.02			V	LVPECL
Logic "0" Level	V _{ol}			V _{cc} - 1.63	V	LVPECL
Rise/Fall Time	T _r /T _f		0.23	0.50	ns	@ 20/80% LVPECL
Enable Function		80% V _{cc} min. or N/C: output active 20% V _{cc} max: output disables to high-Z				Output Option G
		20% V _{cc} max: output active 80% V _{cc} min: output disables to high-Z				Output Option M
Start up Time			10		ms	
Phase Jitter @ 622.08 MHz	φ _J		0.50		ps RMS	Integrated 12 kHz – 20 MHz

Note 1: If the device is powered up below -20°C and then the ambient temperature rises 105°C during normal operation, the output will be interrupted for approximately 2-3 ms. A correction is in process and will be available Q1 2007


Note 2: Contact factory for exact frequency availability over 945 MHz.

Note 3: APR specification is inclusive of initial tolerance, deviation over temperature, shock, vibration, supply voltage, and aging for one year at 50°C mean ambient temperature.


Note 4: See Load Circuit Diagram in this Datasheet. Consult factory with nonstandard output load requirements.

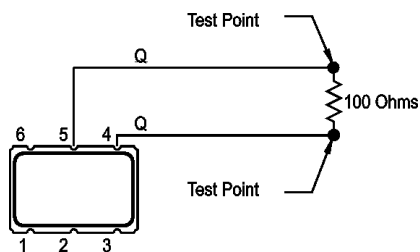

LVDS Load Circuit

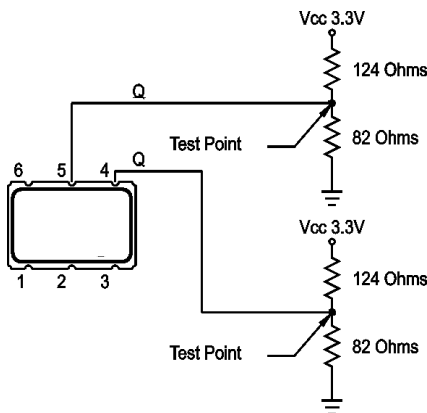

3.3V LVPECL Load Circuit

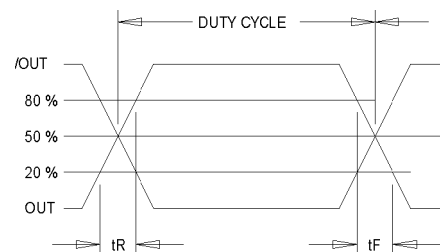

Output Waveform: LVDS/CML/PECL

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

Revision: 11-21-06

MtronPTI Lead Free Solder Profile

