

Keysight M3300A

PXIe Arbitrary Waveform Generator and
Digitizer with Optional Real-Time
Sequencing and FPGA Programming

500 MSa/s, 16 Bits, 2/4 Channel AWG

100 MSa/s, 14 Bits, 4/8 Channel Digitizer

Data Sheet



Fast, Flexible, High-Performance Control, Testing and Prototyping

The M3300A combines high-performance with arbitrary waveform generator channels and digitizer channels in the same module providing the ideal tool for testing and prototyping in control or communications applications. Performance meets simplicity thanks to easy-to-use programming libraries, real-time sequencing technology (Hard Virtual Instrumentation or HVI), and graphical FPGA programming technology.

Features

Outputs (AWG)

- 500 MSa/s, 16 Bits, 2/4 Channels

Inputs (digitizer)

- 100 MSa/s, 14 Bits, 4/8 Channels

Output features

- AWGs, function generators, AM/FM/PM modulators
- Advanced triggering and marking functionalities

Input features

- Powerful data acquisition system (DAQ)
- Advanced triggering and marking functionalities

Less than 400 ns input to output latency

Optional HW programming for high-performance applications

- Real-time sequencing (HVI technology)
- FPGA programming
 - Xilinx Kintex-7 325T or 410T FPGA

Up to 2 GB of onboard RAM (~ 1 Gsamples)

Mechanical/interface

- 2 slots 3U (PXIe)
- Up to 1.6 GB/s transfer BW with P2P capabilities (PCIe Gen 2)
- Independent DMA channels for fast and efficient data transfer

Applications

General purpose AWGs & digitizers

High-performance control

Communications: BB/IF SDR, channel emulation, transceiver testing

Aerospace & defense (A/D): RADAR, electronic warfare (EW)

Hardware-in-the-loop (HIL), automated test equipment (ATE)

Scientific research

Quantum computing

Programming Technology and Software Tools

Software programming

- Easy-to-use native programming libraries for most common languages: C, C++, Visual Studio, LabVIEW, MATLAB, Python, and more

Hardware programming (optional)

- Real-time sequencing (Hard Virtual Instrumentation or HVI technology)
 - Graphical flowchart-style M3601A design environment (-HV1 option required on HW)
 - Ultra-fast, fully-parallelized, hard real-time execution
 - Ultra-fast, time-deterministic decision-making
 - Off-the-shelf inter-module synchronization & data exchange
- FPGA programming
 - Graphical M3602A FPGA design environment (-FP1 option required on HW)
 - No FPGA know-how required
 - Include high-level to low-level design elements: off-the-shelf DSP blocks, MATLAB/Simulink designs, Xilinx CORE Generator IP cores, Xilinx VIVADO/ISE projects, VHDL or Verilog code
 - Ultra-fast, one-click compiling and on-the-fly programming

No programming


- Ready-to-use SD1 SPF (software front panels)

PXIe Arbitrary Waveform Generators, Digitizers and Combination Modules

Product	Type	Outputs (AWGs)				Inputs (Digitizers)			
		Speed (MSa/s)	Bits	Ch	BW (MHz)	Speed (MSa/s)	Bits	Ch	BW (MHz)
M3202A	AWG	1000	14	2/4	DC-400				
M3201A	AWG	500	16	2/4	DC-200				
M3102A	Digitizer					500	14	2/4	DC-200
M3100A	Digitizer					100	14	4/8	DC-100
M3302A	Combo	500	16	2	DC-200	500	14	2	DC-200
M3300A	Combo	500	16	2/4	DC-200	100	14	4/8	DC-100

Functional Block Diagram

Output - Arbitrary Waveform Generator

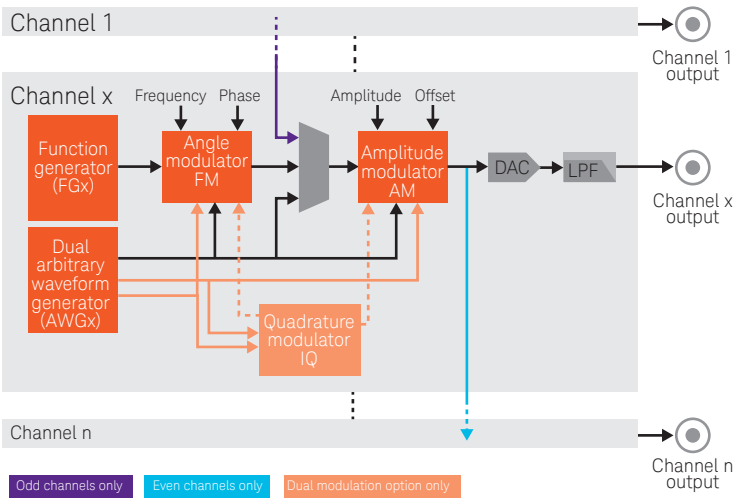

Input - Digitizer

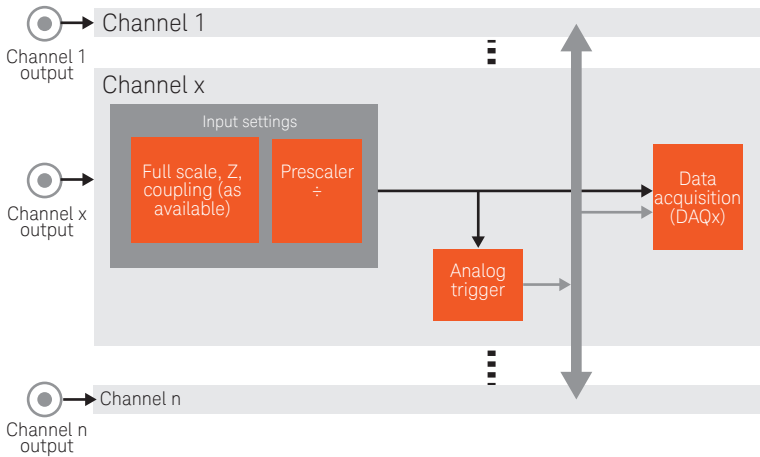


Figure 2. M3300A input functional block diagram, all channels have identical input structure

AWG Technical Specifications and Characteristics

General characteristics

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
Inputs and outputs								
Channels (single-ended mode)	2			4			Out	
Channels (differential mode)	1			2			Out	Differential uses 2 channels
Reference clock ¹	1			1			Out	
Reference clock ²	1			1			In	
Triggers/markers ^{1,3}	1			1			In/out	Reconfigurable
Triggers/markers ^{2,3}	8			8			In/out	Reconfigurable
Output channels overview								
Sampling rate	500			500			MSa/s	Fixed sampling clock
Voltage resolution	16			16			Bits	
Output frequency	DC	200		DC	200		MHz	
Real-time BW	200			200			MHz	
Output voltage	-1.5	1.5		-1.5	1.5		Volts	
Built-in functionalities								
Function generators	2			4				1 per channel
Dual AWGs	2			4				1 per channel
IQ modulators	2			4				1 per channel
Frequency modulators	2			4				1 per channel
Phase modulators	2			4				1 per channel
Amplitude modulators	2			4				1 per channel
DC offset modulators	2			4				1 per channel
Onboard memory								
RAM memory	16	2048		16	2048		MBytes	

1. At front panel
2. At backplane
3. Markers available from firmware version v3.0 or later

I/O specifications

	M3300A-C24			M3300A-C48				
Parameter	Min	Typ	Max	Min	Typ	Max	Units	Comments
Output channels								
Sampling rate	500			500			MSa/s	Fixed sampling clock
Output frequency	DC		200	DC		200	MHz	Limited by a reconstruction filter
Output voltage	−1.5		1.5	−1.5		1.5	Volts	On a 50 Ω load
Source impedance	50			50			Ω	
Reference clock output								
Frequency	10 or 100			10 or 100			MHz	Generated from the internal clock, user selectable
Voltage	800			800			mV _{pp}	On a 50 Ω load
Power	2			2			dBm	On a 50 Ω load
Source impedance	50			50			Ω	AC coupled
External I/O trigger/marker								
V _{IH}	2		5	2		5	V	
V _{IL}	0		0.8	0		0.8	V	
V _{OH}	2.4		3.3	2.4		3.3	V	On a high Z load
V _{OL}	0		0.5	0		0.5	V	On a high Z load
Input impedance	10			10			K Ω	
Source impedance	TTL			TTL			–	
Speed	500			500			Mbps	

Function generators (FGs) specifications

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
General specifications								
Function generators	2			4			–	1 per channel
Waveform types	4			4			–	Sinusoidal, triangular, square and DC
Frequency range	0	200		0	200		MHz	
Frequency resolution	45			45			Bits	
Frequency resolution	5.7			5.7			μHz	
Phase range	0	360		0	360		Deg	
Phase resolution	24			24			Bits	
Phase resolution	21.5			21.5			μdeg	
Speed performance								
Frequency change rate	100			100			MChanges/s	With HVI technology
Frequency modulation rate	500			500			MSamples/s	With AWGs and angle modulators
Phase change rate	100			100			MChanges/s	With HVI technology
Phase modulation rate	500			500			MSamples/s	With AWGs and angle modulators

Amplitude and offset specifications

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
General specifications								
Amplitude/offset range	−1.5		1.5	−1.5		1.5	Volts	Amplitude + offset values
Amplitude/offset resolution		16			16		Bits	
Amplitude/offset resolution		45.8			45.8		μV	
Speed performance								
Amplitude/offset change rate			500			500	MChanges/s	With HVI technology
Amplitude/offset modulation rate			500			500	MSamples/s	With AWGs and amplitude modulators

Arbitrary waveform generators (AWGs) specifications

	M3300A-C24			M3300A-C48				
Parameter	Min	Typ	Max	Min	Typ	Max	Units	Comments
General specifications								
Dual AWGs	2			4				1 Dual AWG per output channel
Aggregated speed (16 bits)	2000			4000			MSa/s	For all onboard waveforms combined
Aggregated speed (32 bits)	1000			2000			MSa/s	For all onboard waveforms combined
Waveform multiple	5			5			Samples	Waveform length must be a multiple of this value
16-bit waveform length	15	957M		15	957M		Samples	Maximum depends on onboard RAM
32-bit waveform length	10	478M		10	478M		Samples	Maximum depends on onboard RAM
Waveform length efficiency	93.5			93.5			%	Effic. = waveform size/waveform size in RAM
Trigger	Selec.			Selec.				External Trigger (input connector, backplane triggers), software trigger
AWG specifications (16-bit single waveform)								
Speed	500			500			MSa/s	Per AWG
Resolution	16			16			Bits	
AWG destination	Selec.			Selec.				Amplitude, offset, frequency or phase
AWG specifications (16-bit dual waveform)								
Speed (waveform A)	500			500			MSa/s	Per AWG
Speed (waveform B)	500			500			MSa/s	Per AWG
Resolution (waveform A)	16			16			Bits	
Resolution (waveform B)	16			16			Bits	
AWG destination (waveform A)	Selec.			Selec.				Amplitude, offset or I
AWG destination (waveform B)	Selec.			Selec.				Frequency, phase or Q
AWG specifications (32-bit single waveform)								
Speed	100			100			MSa/s	Per AWG, minimum prescaler: 1
Resolution	32			32			Bits	
AWG destination	Selec.			Selec.				Amplitude, offset, frequency or phase
AWG specifications (32-bit dual waveform)								
Speed (waveform A)	100			100			MSa/s	Per AWG, minimum prescaler: 1
Speed (waveform B)	100			100			MSa/s	Per AWG, minimum prescaler: 1
Resolution (waveform A)	32			32			Bits	
Resolution (waveform B)	32			32			Bits	
AWG destination (waveform A)	Selec.			Selec.				Amplitude or offset
AWG destination (waveform B)	Selec.			Selec.				Frequency or phase

Angle modulators specifications

	M3300A-C24			M3300A-C48				
Parameter	Min	Typ	Max	Min	Typ	Max	Units	Comments
General specifications								
Frequency modulators	2			4				1 per output channel
Phase modulators	2			4				1 per output channel
Carrier signal source	FGs			FGs				Table 3 on page 8
Modulating signal source	AWGs			AWGs				Table 5 on page 9
Frequency modulators (16-bit modulating waveform)								
Deviation	–Dev. gain		+Dev. gain	–Dev. gain		+Dev. gain	MHz	
Modulating signal resolution	16			16			Bits	AWG waveform
Modulating signal BW	0		250	0		250	MHz	AWG Nyquist limit
Deviation gain	0		200	0		200	MHz	
Deviation gain resolution	16			16			Bits	
Frequency modulators (32-bit modulating waveform)								
Deviation	–Dev. gain		+Dev. gain	–Dev. gain		+Dev. gain	MHz	
Modulating signal resolution	32			32			Bits	AWG waveform
Modulating signal BW	0		50	0		50	MHz	AWG Nyquist limit
Deviation gain	0		200	0		200	MHz	
Deviation gain resolution	16			16			Bits	
Phase modulators (16-bit modulating waveform)								
Deviation	–Dev. gain		+Dev. gain	–Dev. gain		+Dev. gain	Deg	
Modulating signal resolution	16			16			Bits	AWG waveform
Modulating signal BW	0		250	0		250	MHz	AWG Nyquist limit
Deviation gain	0		180	0		180	Deg	
Deviation gain resolution	16			16			Bits	~ 5.5 mdeg
Phase modulators (32-bit modulating waveform)								
Deviation	–Dev. gin		+Dev. gain	–Dev. gain		+Dev. gain	Deg	
Modulating signal resolution	16			16			Bits	AWG waveform is truncated
Modulating signal BW	0		50	0		50	MHz	AWG Nyquist limit
Deviation gain	0		180	0		180	Deg	
Deviation gain resolution	16			16			Bits	~ 5.5 mdeg

Amplitude modulators specifications

	M3300A-C24			M3300A-C48				
Parameter	Min	Typ	Max	Min	Typ	Max	Units	Comments
General specifications								
Amplitude modulators	2			4				1 per output channel
Offset modulators	2			4				1 per output channel
Carrier signal source	FGs			FGs				Table 3 on page 8
Modulating signal source	AWGs			AWGs				Table 5 on page 9
Amplitude & offset modulators (16-bit modulating waveform)								
Deviation	–Dev. gain	+Dev. gain		–Dev. gain	+Dev. gain		V _p	
Modulating signal resolution	16			16			Bits	AWG waveform
Modulating signal BW	0	250		0	250		MHz	AWG Nyquist limit
Deviation gain	0	1.5		0	1.5		V _p	
Deviation gain resolution	16			16			Bits	Limited by the output DAC
Amplitude & offset modulators (32-bit modulating waveform)								
Deviation	–Dev. gain	+Dev. gain		–Dev. gain	+Dev. gain		V _p	
Modulating signal resolution	16			16			Bits	AWG waveform is truncated
Modulating signal BW	0	50		0	50		MHz	AWG Nyquist limit
Deviation gain	0	1.5		0	1.5		V _p	
Deviation gain resolution	16			16			Bits	Limited by the output DAC

IQ modulators specifications

Parameter	M3300A			Units	Comments
	Min	Typ	Max		
General specifications					
IQ modulators	2				1 per output channel
Carrier signal source	FGs				Table 3 on page 8
Modulating signal source	AWGs				Table 5 on page 9
External I/O trigger/marker					
Amplitude deviation	-1.5		1.5	Vp	
Phase deviation	-180		180	Deg	
I modulating signal resolution	16			Bits	AWG waveform
I modulating signal BW	0		250	MHz	AWG Nyquist limit
Q modulating signal resolution	16			Bits	AWG waveform
Q modulating signal BW	0		250	MHz	AWG Nyquist limit

Clock system specifications

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
General specifications								
Clock frequency	500			500			MHz	Fixed sampling clock

AC performance

	M3300A-C24			M3300A-C48				
Parameter	Min	Typ	Max	Min	Typ	Max	Units	Comments
General characteristics								
Analog output jitter	<2			<2			ps	RMS (cycle-to-cycle)
AWG trigger to output jitter	<2			<2			ps	RMS (cycle-to-cycle) for any trigger referenced to the chassis clock; independent of input trigger jitter if input jitter < 4nS peak-to-peak
Trigger resolution	10			10			ns	
Channel-to-channel skew	<20			<20			ps	Between ch 0 & ch 1, and ch 2 & ch 3
	<50			<50			ps	Between any channel
	150			150			ps	Between modules, chassis dependant ²
Clock output jitter	<2			<2			ps	RMS (cycle-to-cycle)
Clock accuracy and stability	25			25			ppm	PXIe, cPCIe versions; chassis dependent ¹ .
AC characteristics								
Spurious-free dynamic range (SFDR)								P _{out} = 4 dBm, measured from DC to max frequency
f _{out} = 10 MHz	68			68			dBc	
f _{out} = 80 MHz	64			64			dBc	
f _{out} = 120 MHz	57			57			dBc	
f _{out} = 160 MHz	54			54			dBc	
Crosstalk (adjacent channels)								
f _{out} = 10 MHz	<-105			<-105			dB	
f _{out} = 40 MHz	-85			-85			dB	
f _{out} = 80 MHz	-75			-75			dB	
f _{out} = 120 MHz	-88			-88			dB	
f _{out} = 160 MHz	-73			-73			dB	
f _{out} = 200 MHz	-85			-85			dB	
Crosstalk (non-adjacent channels)								
f _{out} = 10 MHz	<-105			<-105			dB	
f _{out} = 40 MHz	-86			-86			dB	
f _{out} = 80 MHz	-78			-78			dB	
f _{out} = 120 MHz	<-105			<-105			dB	
f _{out} = 160 MHz	-92			-92			dB	
f _{out} = 200 MHz	-100			-100			dB	
Phase noise (SSB)								
offset = 1 KHz	<-127			<-127			dBc/Hz	
offset = 10 KHz	<-133			<-133			dBc/Hz	
offset = 100 KHz	<-138			<-138			dBc/Hz	
Average noise power density	<-142			<-142			dBm/Hz	

1. This value corresponds to a M9505A chassis. This value can be improved with an external chassis clock or a system timing module.

2. This value corresponds to a M9005A PXIe chassis.

AC performance, typical

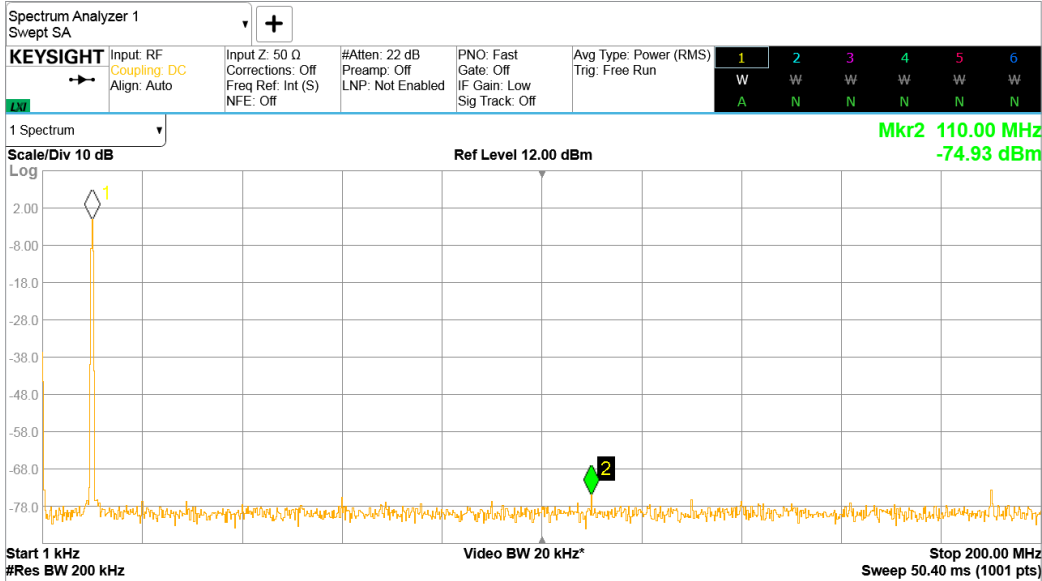


Figure 3. Single-tone spectrum @ f_{out} = 10 MHz

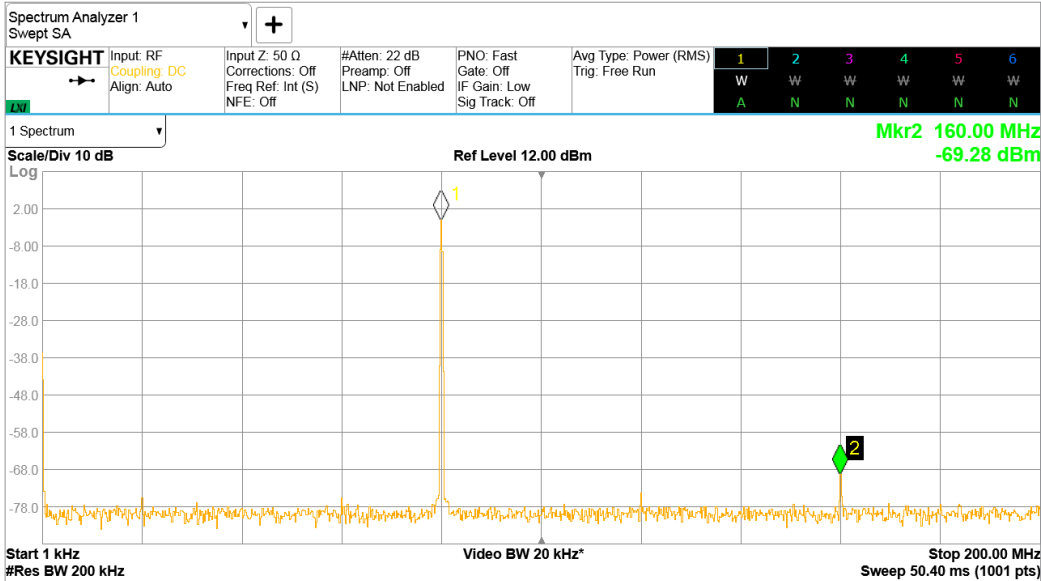


Figure 4. Single-tone spectrum @ f_{out} = 80 MHz

AC performance, typical

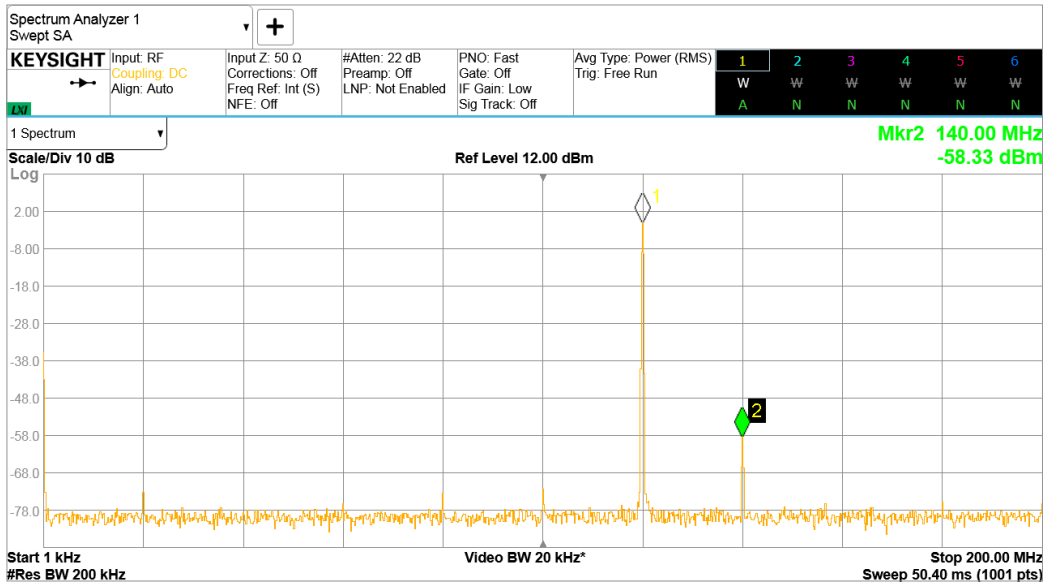


Figure 5. Single-tone spectrum @ $f_{out} = 120$ MHz

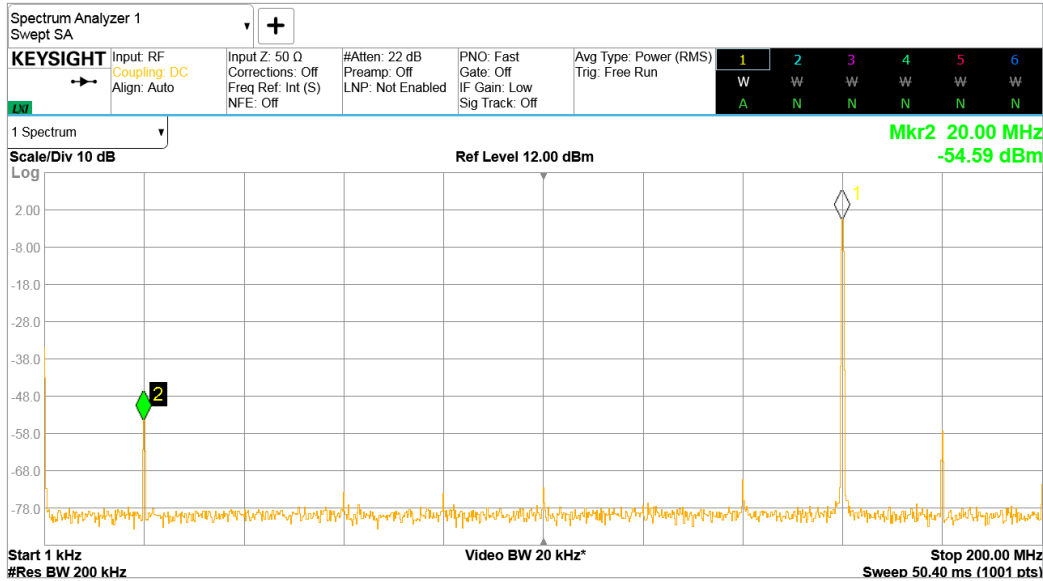


Figure 6. Single-tone spectrum @ $f_{out} = 160$ MHz

Digitizer Technical Specifications and Characteristics


General characteristics

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
Inputs and outputs								
Channels	4			8			Out	
Reference clock ¹	1			1			Out	
Reference clock ²	1			1			In	
Triggers/markers ^{1,3}	1			1			In/out	Reconfigurable
Triggers/markers ^{2,3}	8			8			In/out	Reconfigurable
Input channels overview								
Sampling rate	100			100			MSa/s	
Voltage resolution	14			14			Bits	
Input frequency ⁴	DC	100		DC	100		MHz	
Real-time BW	50			50			MHz	
Built-in functionalities								
Input conditioning blocks	4			8				1 per channel
Analog trigger processors	4			8				1 per channel
Data acquisition blocks	4			8				1 per channel
Onboard memory								
RAM memory	16	2048		16	2048		MBytes	

1. At front panel
2. At backplane
3. Markers available from firmware version v3.0 or later
4. 100 MHz refer to the Front End bandwidth. This digitizer can operate in 1st and 2nd Nyquist zones (using undersampling technique), but its real-time BW is limited by Nyquist to some 50 MHz. As an example for a band-limited signal of 70 MHz with a 10 MHz signal bandwidth the aliased component will appear between 25 to 35 MHz (30 ± 5 MHz).

I/O specifications

Analog input characteristics	
Number of channels	C24 or C48
Sampling rate	100 MSa/s option CLF
Configurable inputs: impedance	50Ω or 1 MΩ (HiZ)
Configurable inputs: Coupling	AC or DC
Input voltage range (50Ω)	400 mVpp to 6Vpp (continue: variable attenuator at input)
Input voltage range (HiZ)	200 mVpp to 20Vpp (continue: variable attenuator at input)
Bandwidth limit filters	100 MHz
Effective number of bits (ENOB)1	10.8 bits @30MHz (typical)
Noise floor	-142 dBm/Hz @30 MHz (typical)
SINAD	67 dB @30 MHz (typical)
Spurious free dynamic range (SFDR) + Total Harmonic Distorsion	79 dBc (typical)

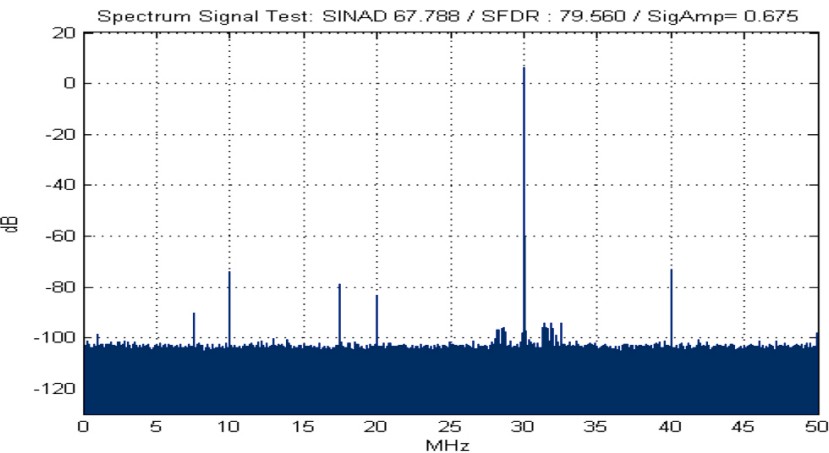

Parameter	M3300A			Units	Comments
	Min	Typ	Max		
Reference clock output					
Frequency	10 or 100			MHz	Generated from the internal clock. User selectable
Voltage	800			mVpp	On a 50 Ω load
Power	2			dBm	On a 50 Ω load
Source impedance	50			Ω	AC coupled
External I/O trigger/marker					
V _{IH}	2		5	V	
V _{IL}	0		0.8	V	
V _{OH}	2.4		3.3	V	On a high Z load
V _{OL}	0		0.5	V	On a high Z load
Input impedance	10			K Ω	
Source impedance	TTL			-	
Speed	500			Mbps	

Data acquisition blocks (DAQs) specifications

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
General specifications								
DAQs	4			8				1 per channel
Aggregated speed	400			800			MSa/s	For all onboard DAQs combined
Acquisition burst multiple	5			5			Samples	Burst length must be a multiple of this value
Acquisition RAM capacity	15		957M	15		957M	Samples	Maximum depends on onboard RAM
Acquisition RAM capacity effic.	93.5			93.5			%	Effic. = waveform size/waveform size in RAM
Trigger	Selec.			Selec.				Hardware trigger (analog channels, input trigger, backplane triggers), Software trigger
DAQ specifications								
Speed	100			100			MSa/s	Per DAQ
Resolution	14			14			Bits	

Clock system specifications

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
General specifications								
Clock frequency	100			100			MHz	

System Specifications

Environmental specifications (PXI Express)

Parameter	M3300A-C24			M3300A-C48			Units	Comments
	Min	Typ	Max	Min	Typ	Max		
System bus								
Slots	2			2			Slots	PXI Express (CompactPCI Express compatible)
PCI Express type	Gen 1		Gen 2	Gen 1		Gen 2	–	Automatic gen negotiation, chassis dependent
PCI Express link	1		4	1		4	Lanes	Automatic lane negotiation, chassis dependent
PCI Express speed	400		1600	400		1600	MBytes/s	Depends on # of lanes, chassis, congestion, and more
Sustainable throughput	200		800	200		800	MPoints/s	Depends on # of lanes, chassis, congestion, and more
Power dissipation								
3.3 V PXIe power supply	3			3			A	~ 10 W
12 V PXIe power supply	3.5			3.5			A	~ 40 W

Environmental ¹		
Temperature range	Operating	0 to +55°C (10,000 feet)
	Non-operating	-40 to +70 °C (up to 15,000 feet)
Max operative altitude		2000 m (10,000 feet)
Operating Humidity range (%RH)		10 to 95% at 40 °C
Non-operating Humidity range (%RH): 5 to 95		5 to 95%
Calibration interval		1 year
EMC		Complies with European EMC Directive – IEC/EN 61326-1 – CISPR Pub 11 Group 1, class A This ISM device is in compliance with Canadian ICES-001 Cet appareil ISM est conforme à la norme NMB-001 du Canada. This ISM device is in compliance with Australian and New Zealand RCM This ISM device is in compliance with South Korea EMC KCC

1. Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.



Ordering Information ¹

Product	Description
M3300A	PXI combo AWG + digitizer: 500/100 MSa/s, 16/14 bits
Options	Description
M3300A-C24 / -C48	Two channels AWG + four channels DIG ² / four channels AWG + eight channels DIG
M3300A-CLF	Fixed sampling clock, low jitter ²
M3300A-DM1	Dual modulation capability for the AWG (amplitude and angle simultaneously)
M3300A-M01 / -M12 / -M20	Memory 16 MB, 8 MSamples ² / 128 MB, 60 MSamples / 2 GB, 1 GSamples
HW programming options	Description
M3300A-HVI	Enabled HVI programming, requires an HVI design environment license (M3601A)
M3300A-FP1	Enabled FPGA programming, requires -K32 or -K41 option and an FPGA design environment license (M3602A)
M3300A-K32 / -K41	FPGA, Xilinx 7K325T / 7K410T, required for -FP1 option only (needs memory option -M20)
Related software	Description
M3601A	HVI design environment
M3602A	FPGA design environment

1. All options must be selected at time of purchase and are not upgradable
2. These options represent the standard configuration

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.
From Hewlett-Packard to Agilent to Keysight.



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

This information is subject to change without notice.
© Keysight Technologies, 2017 - 2018
Published in USA, February 20, 2018
5992-1809EN
www.keysight.com

myKeysight

myKeysight
www.keysight.com/find/mykeysight
A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration
Register your products to get up-to-date product information and find warranty information.



www.pxisa.org
PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Keysight Services
www.keysight.com/find/service
Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans
www.keysight.com/find/AssurancePlans
Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners
www.keysight.com/find/channelpartners
Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/m3300a

