

Customer Information Sheet

DRAWING No.: M50-360XX42




IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

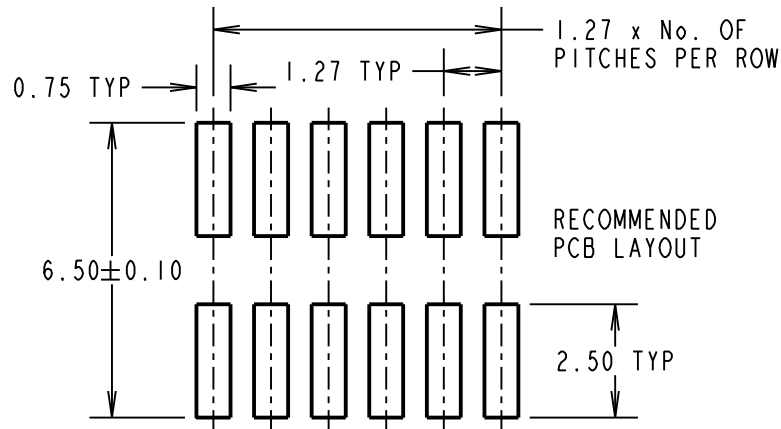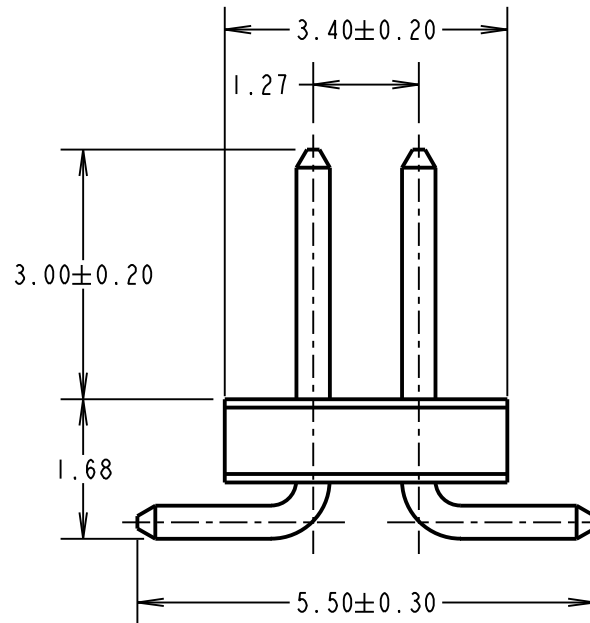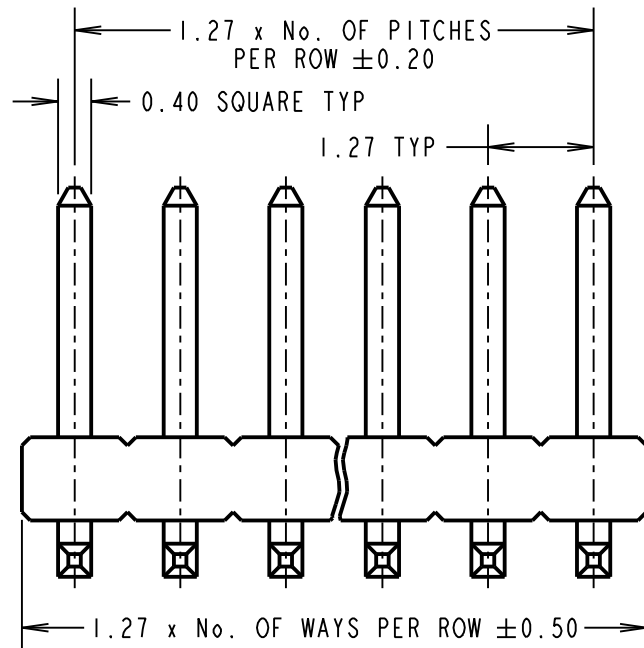

SPECIFICATIONS:

MATERIAL:

MOULDING = HIGH TEMP THERMOPLASTIC UL94V-0

CONTACTS = BRASS

FINISH:

CONTACTS = 0.02 - 0.08µ GOLD ON CONTACT AREA,
2.5 - 3.8µ TIN OVER NICKLE ON TAILS

ELECTRICAL:

CURRENT RATING (ALL CONTACTS ARE

ELECTRICALLY LOADED) = 1A

CONTACT RESISTANCE = 30mΩ MAX

INSULATION RESISTANCE = 5000MΩ MIN

DIELECTRIC WITHSTANDING = 600V AC MIN

MECHANICAL:

PIN RETENTION = 4.4N NOMINAL

SOLDERABILITY = 250°C FOR 3 TO 5 SECONDS

DURABILITY = 600 CYCLES

ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO +105°C

PACKING:

BAG

FOR COMPLETE SPECIFICATION, SEE COMPONENT
SPECIFICATION C029XX (LATEST ISSUE)

ORDER CODE:

M50-360XX42

No. OF WAYS PER ROW

01 TO 50

FINISH:

42 = SELECTIVE GOLD
+ 100% TIN OVER NICKEL

SB	11	20.07.11	11384
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		M.G.PLESTED	
DRAWN:		J. KIER	
CUSTOMER REF.:			
ASSEMBLY DRG:			

NOTES:

1. ALL TOLERANCES ARE ±0.15 UNLESS OTHERWISE STATED.

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

1.27mm PITCH DIL VERTICAL
SMT PIN HEADER

DRAWING NUMBER:

M50-360XX42

SHT
2 OF 2