
M5234P, FP

QUAD COMPARATOR

DESCRIPTION

The M5234 is a semiconductor circuit for a comparator designed to operate over a wide supply voltage range from 2 ~ 36V from a single power supply, with four circuits in each 14-pin DIP and 14-pin mini flat package. A differential circuit which is equivalent to a conventional single power supply operational amplifier is used to enable operation from GND level to improve input characteristics. Power dissipation (circuit current) is low and output voltage is large. It is a general-purpose comparator suitable for a variety of electronic equipment.

PIN CONFIGURATION (TOP VIEW)

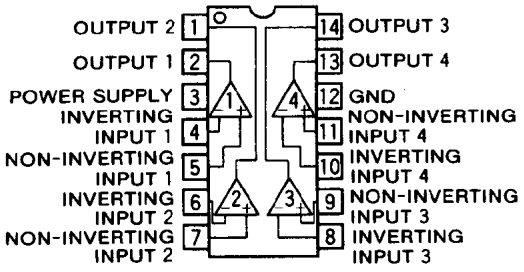

Outline 14P4 (P)
14P2S-A (FP)

FEATURES

- Wide operating supply voltage range ..... 2V~36V
  Dual power supplies: ±1V~±18V
- Low circuit current ..... 0.8mA(typ.)
- Wide common mode input voltage range
  ..... 0V~V_{CC}−1.5V (single power supply)
- Open collector output
- Output sink current 25mA
- Response time 1.3μsec
- Pin compatible with general-purpose comparators 339, 2901


APPLICATION

Voltage comparator, window comparator, CR timer, time delay circuit, oscillator, etc.

RECOMMENDED OPERATING CONDITIONS

Supply voltage range ..... 2~36V
Rated supply voltage 12V

EQUIVALENT CIRCUIT

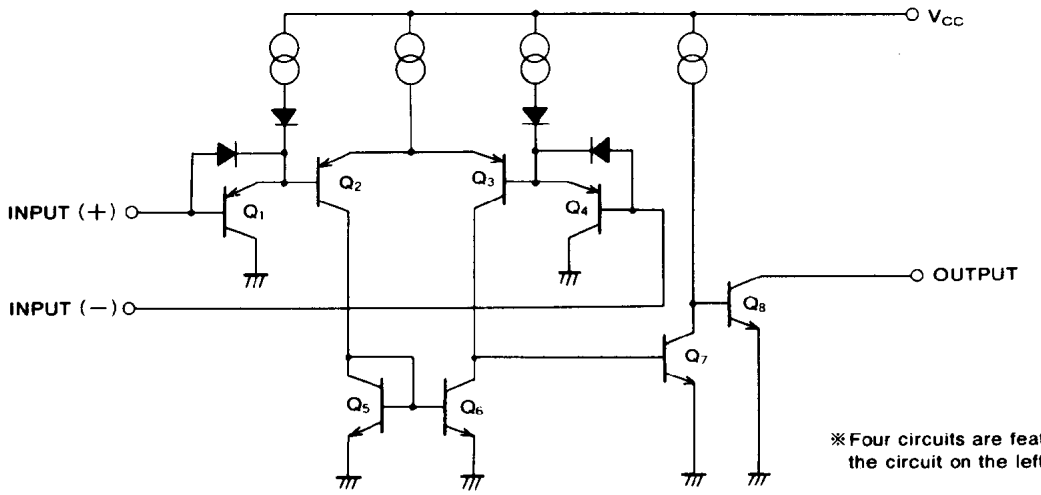

※Four circuits are featured in the circuit on the left.

M5234P, FP

QUAD COMPARATOR

ABSOLUTE MAXIMUM RATINGS (T_a=25℃, unless otherwise noted)


Symbol	Parameter	Ratings	Unit
V_{CC}	Supply voltage	36(±18)	V
V_{ID}	Differential input voltage	36	V
V_{ICM}	Common mode input voltage range	−0.3～+36	V
P_d	Power dissipation	700(DIP)/550(FP)	mW
T_{opr}	Operating temperature	−20～+75	℃
T_{stg}	Storage temperature	−55～+125	℃

ELECTRICAL CHARACTERISTICS (T_a=25℃, V_{CC}=±15V)


Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{IO}	Input offset voltage	V_O=1.4V, V_{REF}=1.4V, R_S=0Ω		2	5	mV
I_{IO}	Input offset current			5	50	nA
I_B	Input bias current			25	250	nA
V_{ICM}	Common mode input voltage range		0		V_{CC}−1.5	V
G_V	Voltage gain	R_L=15kΩ		200		V/mV
I_{CC}	Circuit current	R_L=∞		0.8	2	mA
t_{PLH}	Response time	R_L=5.1kΩ, V_{RL}=5V		1.3		μsec
I_{sink}	Output sink current	$V_{IN(-)}$=1V, $V_{IN(+)}$=0V, V_O≦1.5V	10	25		mA
V_{OL}	Output saturation voltage	$V_{IN(-)}$=1V, $V_{IN(+)}$=0V, I_{sink}=8mA		200	400	mV
I_{LO}	Output leak current	$V_{IN(+)}$=1V, $V_{IN(-)}$=0V, V_O=5V		0.1		nA

TYPICAL CHARACTERISTICS

THERMAL DERATING (MAXIMUM RATING)

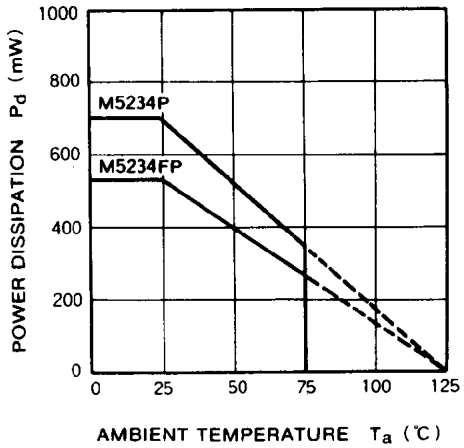


CIRCUIT CURRENT VS. SUPPLY VOLTAGE

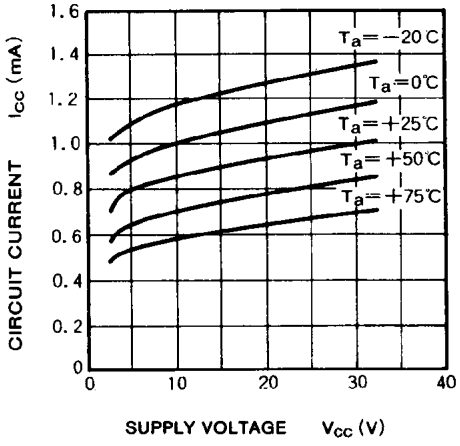


MITSUBISHI ELECTRIC


INPUT BIAS CURRENT VS. SUPPLY VOLTAGE

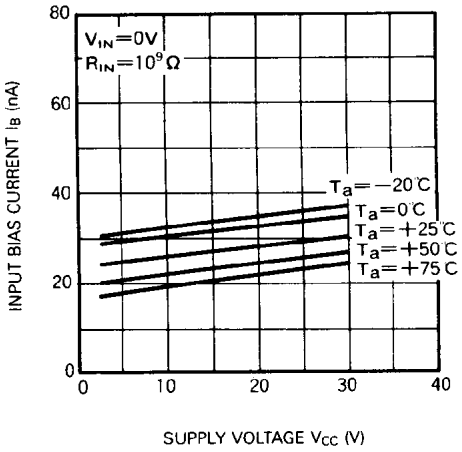


OUTPUT SATURATION VOLTAGE VS. OUTPUT SINK CURRENT

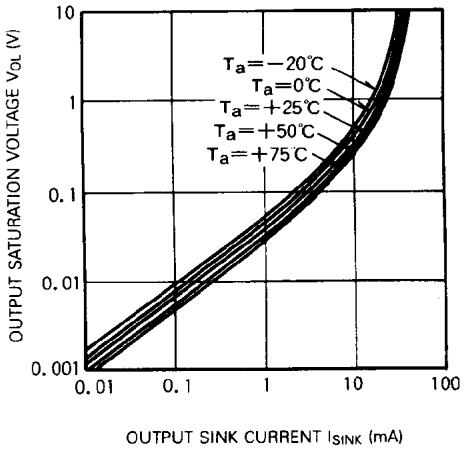

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES VS. NEGATIVE TRANSITION

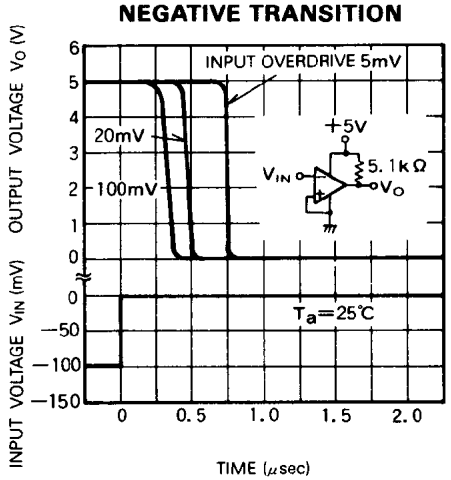

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES VS. NEGATIVE TRANSITION

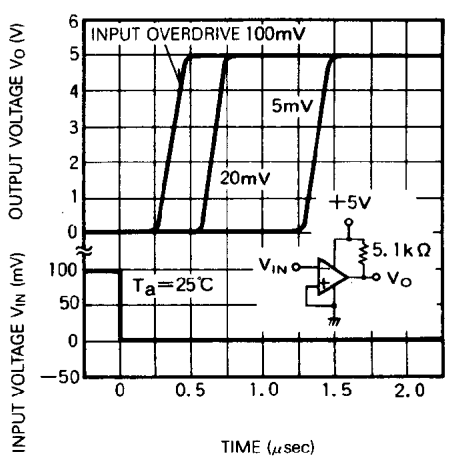

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.