
M57714SL


360-380MHz, 12.5V, 7W, FM MOBILE RADIO

OUTLINE DRAWING Dimensions in mm

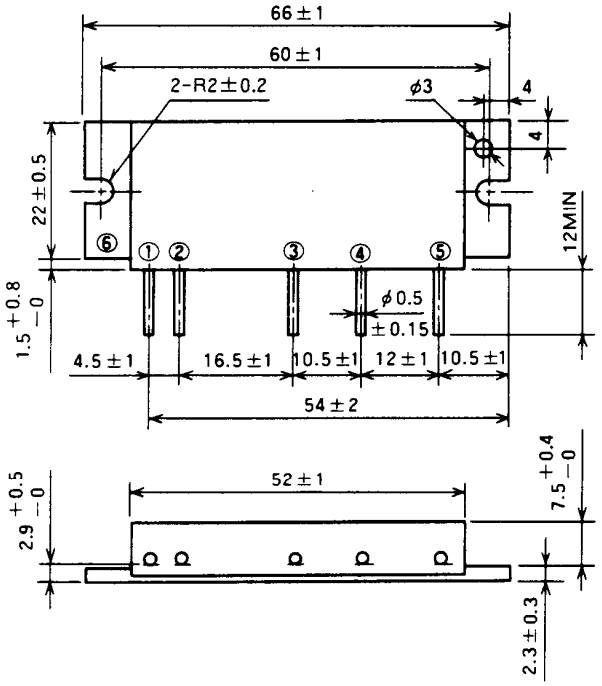

H3

BLOCK DIAGRAM

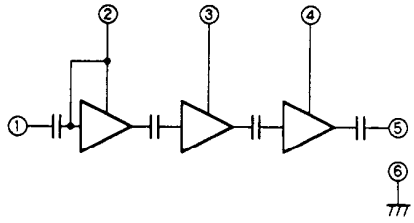

PIN :
① Pin : RF INPUT
② Vcc1 : 1st. DC SUPPLY
③ Vcc2 : 2nd. DC SUPPLY
④ Vcc3 : 3rd. DC SUPPLY
⑤ Po : RF OUTPUT
⑥ GND : FIN

ABSOLUTE MAXIMUM RATINGS (Tc = 25℃ unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage		17	V
Icc	Total current		4	A
Pin(max)	Input power	ZG = ZL = 50 Ω	0.2	W
Po(max)	Output power	ZG = ZL = 50 Ω	12	W
Tc(OP)	Operation case temperature		− 30 to 110	℃
Tstg	Storage temperature		− 40 to 110	℃

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc = 25℃ unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	Pin = 0.1W Vcc = 12.5V ZG = ZL = 50 Ω	360	380	MHz
Po	Output power		7		W
ηT	Total efficiency		38		%
2fo	2nd. harmonic			− 30	dBc
ρin	Input VSWR			2	−
−	Load VSWR tolerance	Vcc = 15.2V, Po = 7W (Pin : controlled) Load VSWR=20:1 (All phase), 2sec. ZG = 50 Ω	No degradation or destroy		−

Note. Above parameters, ratings, limits and conditions are subject to change.

MITSUBISHI ELECTRIC