
Datamate Connectors


Female Crimp Trio-Tek

Datamate Trio-Tek

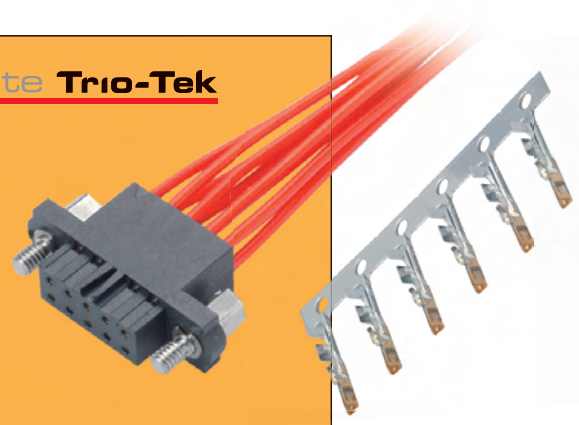


- Crimp inspection window in housing.
- Mates with Male connectors shown on pages 34 to 43.
- Contacts available separately, see page 16.
- Triangular contact design for automated assembly equipment.
- Ideal for volume applications.


WITH JACKSCREWS

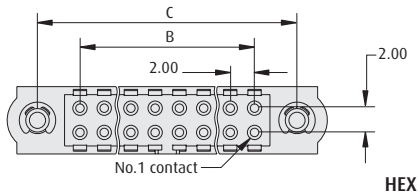

CALCULATION	
A	B + 12
B	Total No. of Contacts – 2
C	B + 7

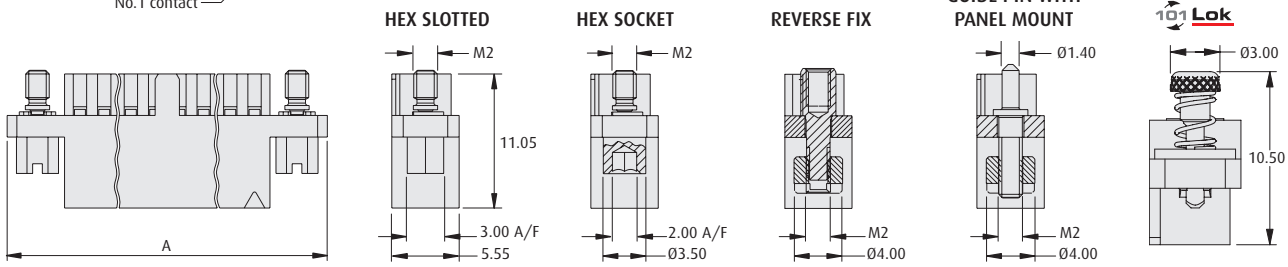

WITHOUT JACKSCREWS

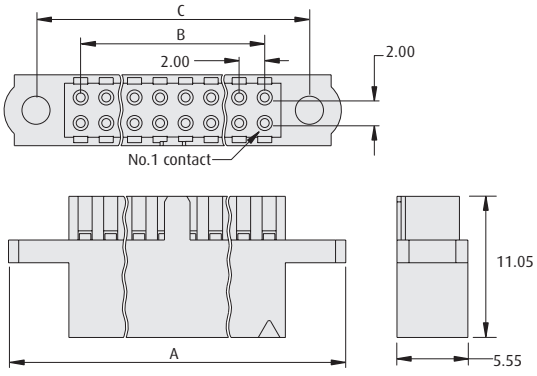


TOOLS

Recommended Crimp Tool – Z80-255
Contact Removal Tool – Z80-258
See page 78

- Instruction sheets available at www.harwin.com/downloads/instructions

WIRE STRIPPING DETAILS



HOW TO ORDER

M80 – 45X XX XX

SERIES CODE

HOUSINGS			
454	Without Jackscrews	457	Reverse Fix Jackscrews
455	Hex Slotted Jackscrews	458	Guide pin with panel mount
456	Hex Socket Jackscrews	459	101Lok jackscrews

FINISH	
98	Housings (Pd)

TOTAL NO. OF CONTACTS
06, 08, 10, 12, 14, 20, 26, 34, 42, 50

All dimensions in mm.

www.harwin.com

HARWiN