


Customer Information Sheet

DRAWING No.: M80-PF1 TO M80-PF2	IF IN DOUBT - ASK	©	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm

SPECIFICATIONS:
MATERIALS:
BODY = COPPER ALLOY
FINISH:
BODY = 0.76µ MIN GOLD OVER NICKEL
ELECTRICAL:
CONTACT RESISTANCE = 6mΩ MAX
CURRENT RATING = 40A
MECHANICAL:
DURABILITY = 500 OPERATIONS
INSERTION FORCE = 15N MAX,
WITHDRAWAL FORCE = 0.5N MIN
ENVIRONMENTAL:
TEMPERATURE RANGE = -55°C TO +150°C

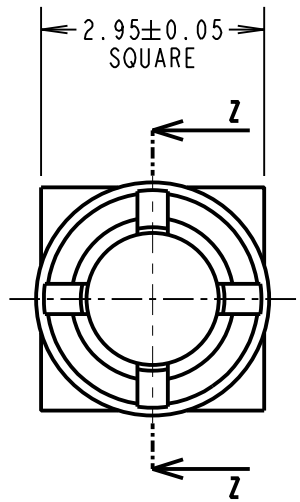

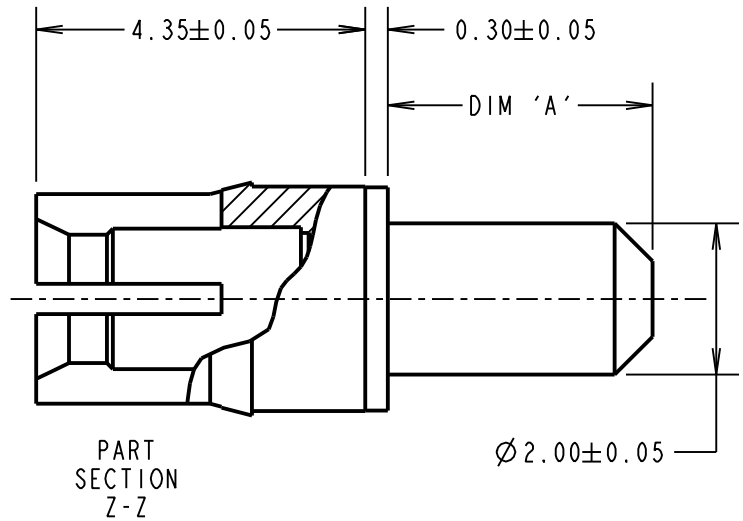

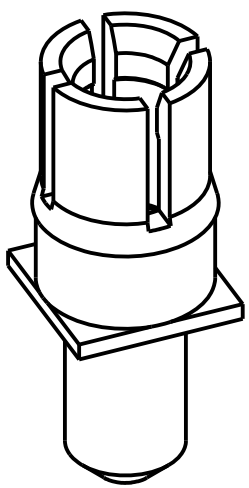

PART No.	DIM 'A'
M80-PF1	3.50
M80-PF2	5.00

NOTES:
1. RECOMMENDED PCB HOLE SIZE = Ø2.10mm MIN.
2. FOR ALL OTHER ELECTRICAL/ MECHANICAL REQUIREMENTS, SEE COMPONENT SPECIFICATION C005XX (LATEST ISSUE).

MSP	2	10.07.17	13440
NAME	ISS.	DATE	C/NOTE

APPROVED: M.PERREN
CHECKED: S.BENNETT
DRAWN: MARK G PLESTED
CUSTOMER REF.:
ASSEMBLY DRG:

HARWIN
www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL: SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE: DATAMATE MIX-TEK HIGH POWER CONTACT FEMALE VERTICAL PC-TAIL

DRAWING NUMBER: M80-PF1 TO M80-PF2

SHT 2 OF 2