


Optical Digital Connectors

MA-909, CSK-M94

FEATURES

1. A small L-type plug having a built-in Optical/Electric converter (E/O type, O/E type).
2. An adjustable device (A device for adjusting fiber length is provided.) is provided.
3. Electrical plug fitting to socket (CSK-M94) ensures excellent vibration resistance with easy handling.
4. A lock device ensures excellent vibration resistance.

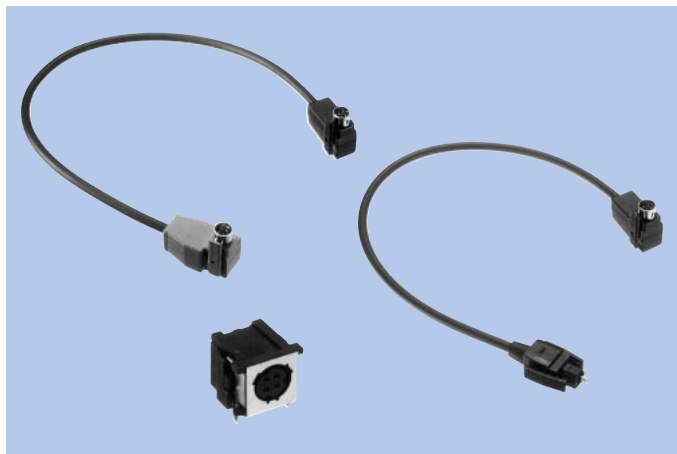

HOW TO ORDER

1. MA-909 Series

MA-909- -

1 2 3

- 1 Series No. (909)
- 2 Running No. assigned by us
- 3 Supplementary No.

2. CSK-M94

M94- -

1 2 3

- 1 Series No. (M94)
- 2 Running No. assigned by us
- 3 Supplementary No.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Transmission Speed	DC~6Mb/s (NRZ)
Output Interface	TTL direct-drive
Input Interface	LED direct-drive
Pulse Width Distortion	±30ns
Jitter Quantity	15ns max.

MECHANICAL CHARACTERISTICS

Min. Bending Radius of Fiber	30mm
------------------------------	------

DIMENSIONS

MC-909