
Amplifier, Power, 2W 5.0-8.5 GHz

Features

- **2 Watt Saturated Output Power Level**
- **Variable Drain Voltage (4-10V) Operation**
- **MSAG™ Process**
- **5x5 mm 20 Lead MLP Package**

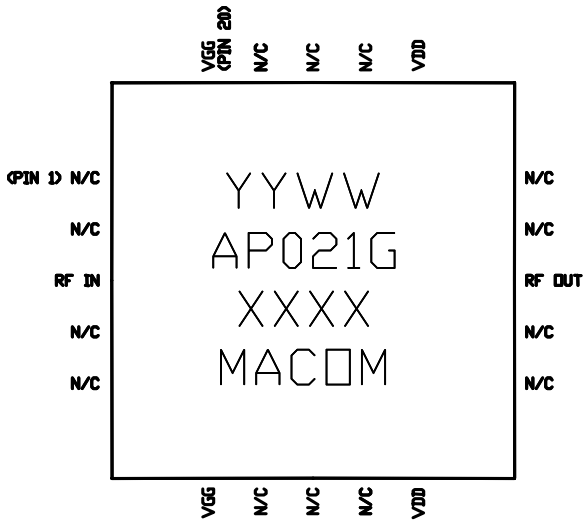

Description

The MAAP-000021-PKG0003 is a 2-stage 2 W power amplifier with on-chip bias networks in a 20 lead MLP package, allowing easy assembly. This product is fully matched to 50 ohms on both the input and output. It can be used as a power amplifier stage or as a driver stage in high power applications.

Each device is 100% RF tested to ensure performance compliance. The part is fabricated using M/A-COM's GaAs Multifunction Self-Aligned Gate (MSAG™) Process.

Primary Applications

- Multiple Band Point-to-Point Radio
- SatCom
- ISM Band

Also Available in:

			SAMPLE BOARDS	
Description	**Die**	**Ceramic Package**	**Ceramic Package**	**Plastic Package**
Part Number	MAAPGM0021-DIE	MAAPGM0021	MAAPGM0021-SMB	MAAP-000021-SMB003

Electrical Characteristics: T_C = 30°C[1], Z_0 = 50Ω, V_{DD} = 8V, I_{DQ} = 600 mA[2], P_{in} = 18dBm, R_G = 120Ω

Parameter	Symbol	Typical	Units
Bandwidth	f	5.0-8.5	GHz
Output Power	POUT	33	dBm
1-dB Compression Point	P1dB	32	dBm
Small Signal Gain	G	17	dB
Power Added Efficiency	PAE	35	%
Input VSWR	VSWR	1.6	—
Output VSWR	VSWR	2.5:1	—
Gate Supply Current	I_{GG}	<8	mA
Drain Supply Current, under RF Drive	I_{DD}	0.9	A
Output Third Order Intercept	OTOI	40	dBm
3rd Order Intermodulation Distortion, Single Carrier Level = 22 dBm	IM3	-13	dBm

1. **T_C = Case Temperature.**
2. **Adjust V_{GG} between –2.6 to-1.2 to achieve indicated I_{DQ}.**

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

Maximum Ratings[3]

Parameter	Symbol	Absolute Maximum	Units
Input Power	P_{IN}	23.0	dBm
Drain Supply Voltage	V_{DD}	+12.0	V
Gate Supply Voltage	V_{GG}	-3.0	V
Quiescent Drain Current (No RF)	I_{DQ}	950	mA
Quiescent DC Power Dissipated (No RF)	P_{DISS}	9.5	W
Junction Temperature	T_J	170	°C
Storage Temperature	T_{STG}	-55 to +150	°C

3. Operation beyond these limits may result in permanent damage to the part.


Recommended Operating Conditions[4]

Characteristic	Symbol	Min	Typ	Max	Unit
Drain Supply Voltage	V_{DD}	6.0	8.0	10.0	V
Gate Supply Voltage	V_{GG}	-2.6	-1.7	-1.2	V
Input Power	P_{IN}		18	21.0	dBm
Junction Temperature	T_J			150	°C
Thermal Resistance	Θ_{JC}		13.4		°C/W
Package Base Temperature	T_B			Note 5	°C

4. Operation outside of these ranges may reduce product reliability.
5. Maximum Package Case Temperature = 170°C — Θ_{JC}* V_{DD} * I_{DQ}



Power Derating Curve, Quiescent (No RF)

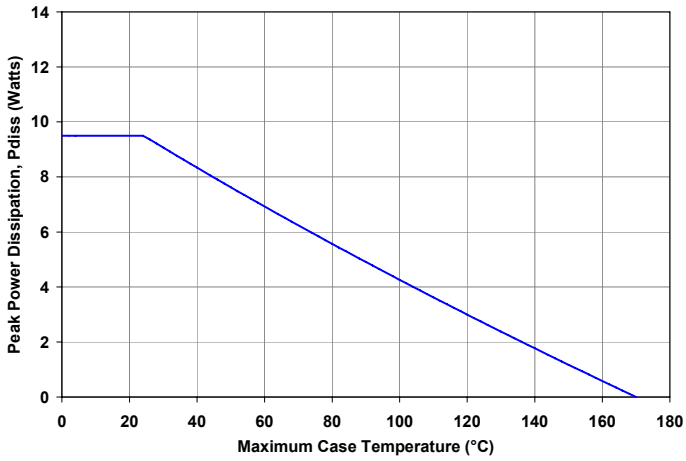

Operating Instructions

This device is static sensitive. Please handle with care.
To operate the device, follow these steps.

1. Apply V_{GG} = -1.7 V, V_{DD}= 0 V.
2. Ramp V_{DD} to desired voltage, typically 8 V.
3. Adjust V_{GG} to set I_{DQ}, (approxmately @ –1.7V).
4. Set RF input.
5. Power down sequence in reverse. Turn gate voltage off last.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

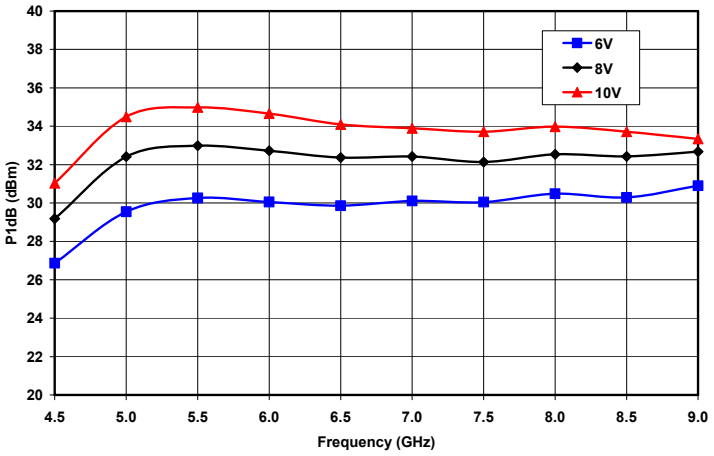


Figure 1. 1dB Compression vs. Frequency and Drain Voltage at IDQ = 600mA

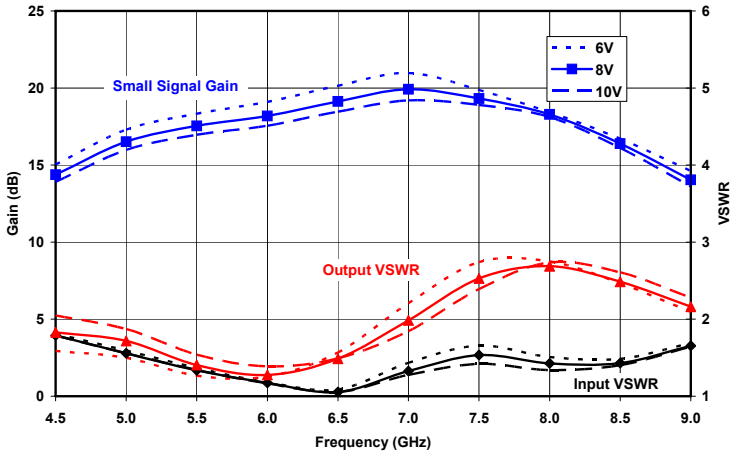


Figure 2. Small Signal Gain and Input & Output VSWR vs. Frequency and Drain Voltage at IDS = 600mA

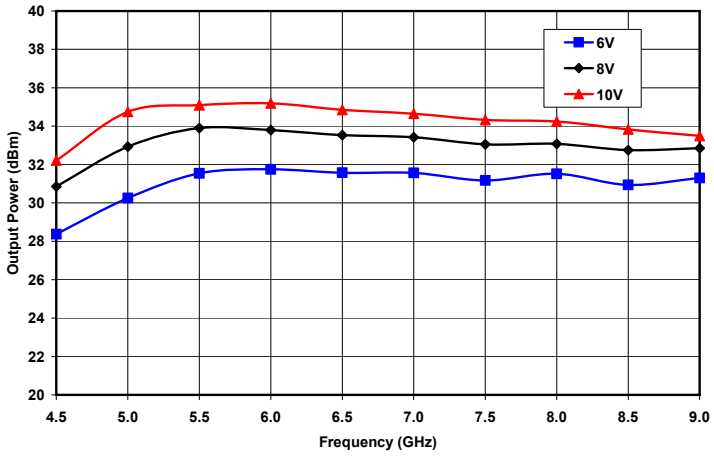


Figure 3. Saturated Output Power vs. Frequency and Drain Voltage at IDQ = 600mA

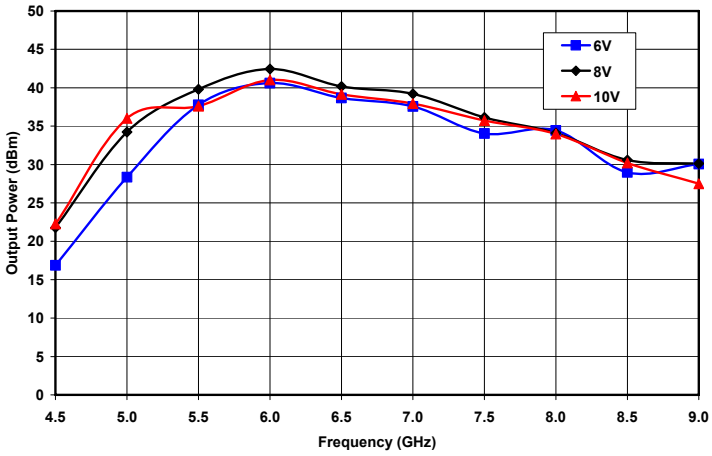


Figure 4. Saturated Power Added Efficiency vs. Frequency and Drain Voltage at IDQ = 600mA

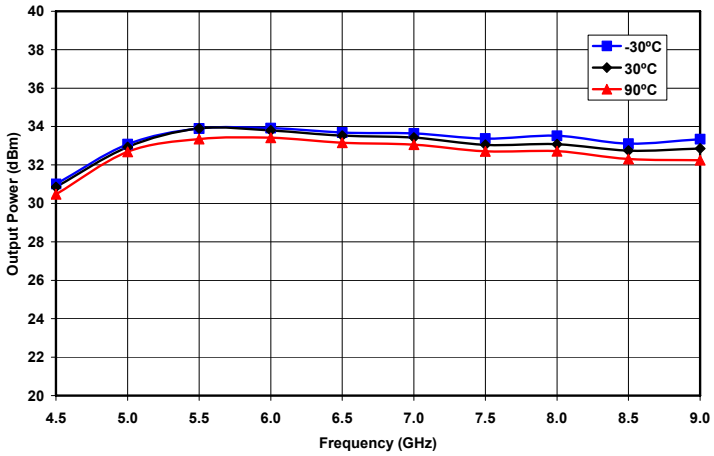


Figure 5. Saturated Output Power vs. Frequency and Case Temperature at VD = 8V and IDQ = 600 mA

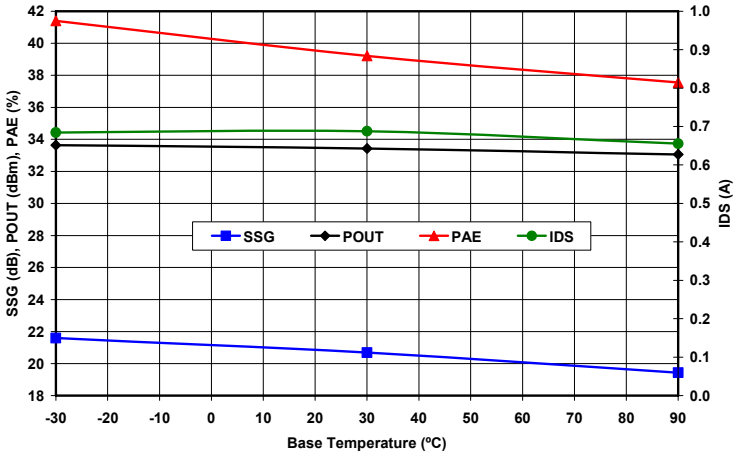


Figure 6. Small Signal Gain & Saturated Output Power, Power Added Efficiency, and Drain Current vs. Case Temperature at 7GHz, VD = 8V, and IDQ = 600 mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

VD = 6V

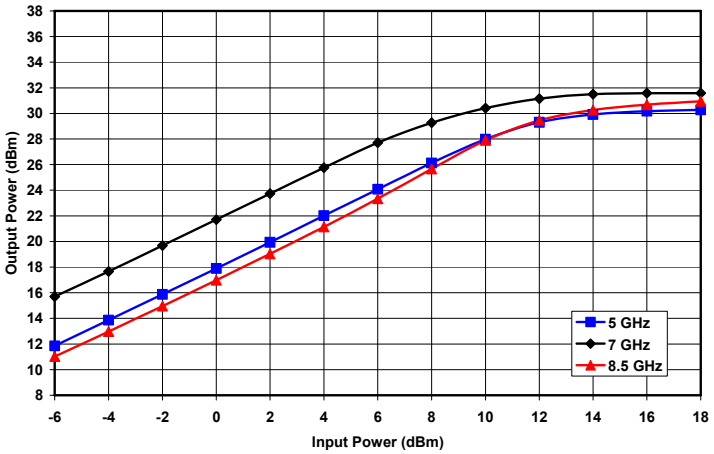


Figure 7. Output Power vs. Input Power and Frequency at VD = 6V and IDQ = 600mA

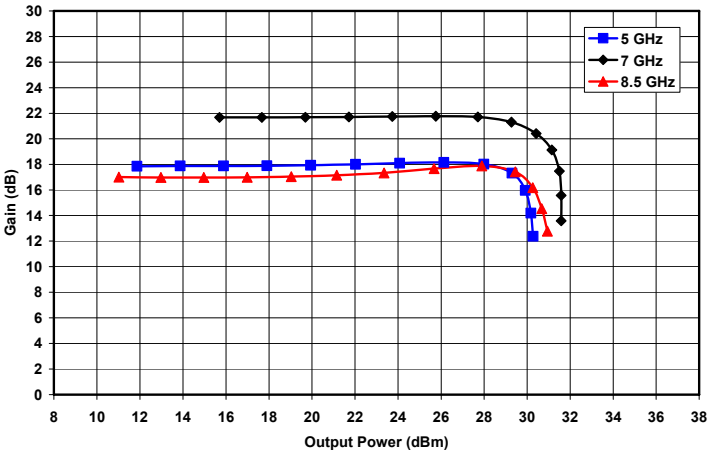


Figure 8. Gain vs. Output Power and Frequency at VD = 6V and IDQ = 600mA

VD = 8V

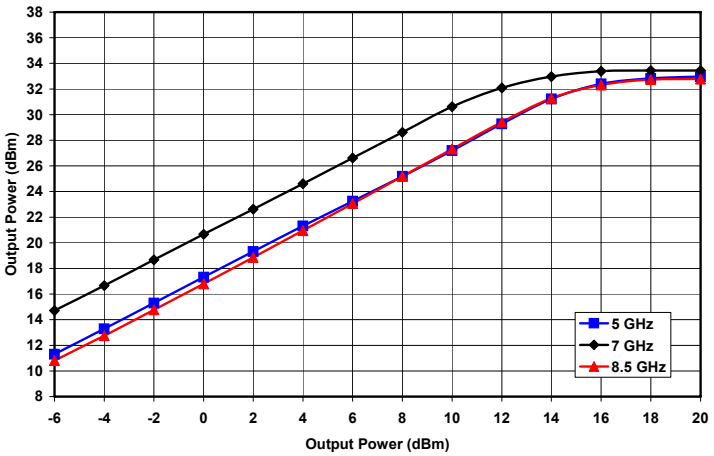


Figure 9. Output Power vs. Input Power and Frequency at VD = 8V and IDQ = 600mA

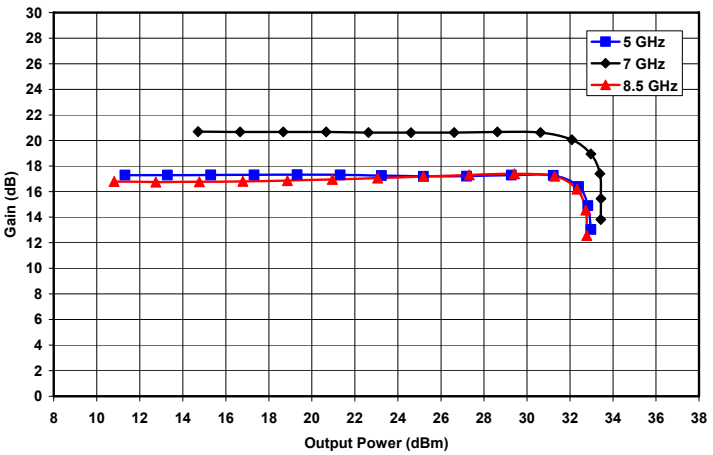


Figure 10. Gain vs. Output Power and Frequency at VD = 8V and IDQ = 600mA

VD = 10V

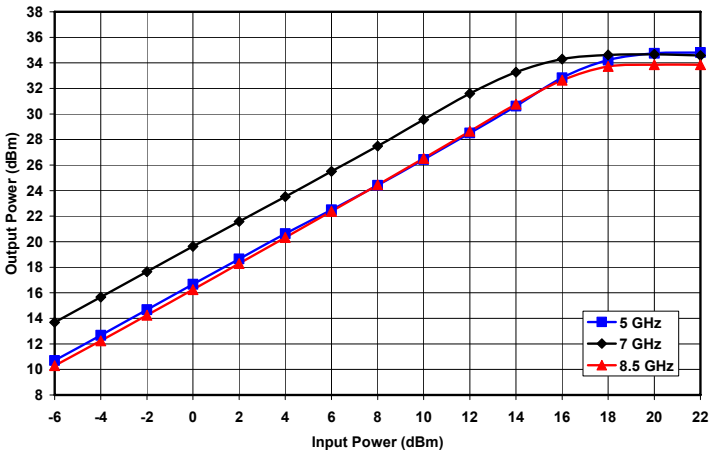


Figure 11. Output Power vs. Input Power and Frequency at VD = 10V and IDQ = 600mA

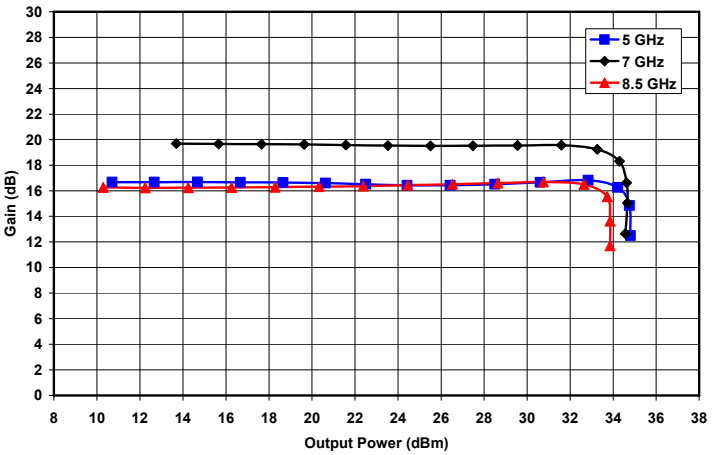


Figure 12. Gain vs. Output Power and Frequency at VD = 10V and IDQ = 600mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

VD = 6V

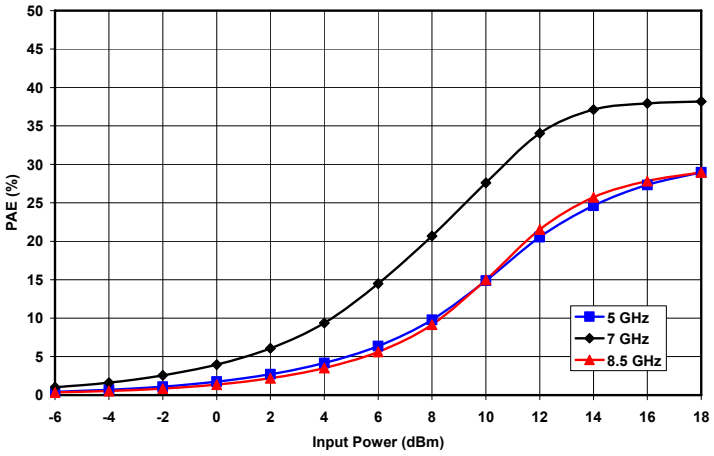


Figure 13. Power Added Efficiency vs. Input Power and Frequency at VD = 6V and IDQ = 600mA

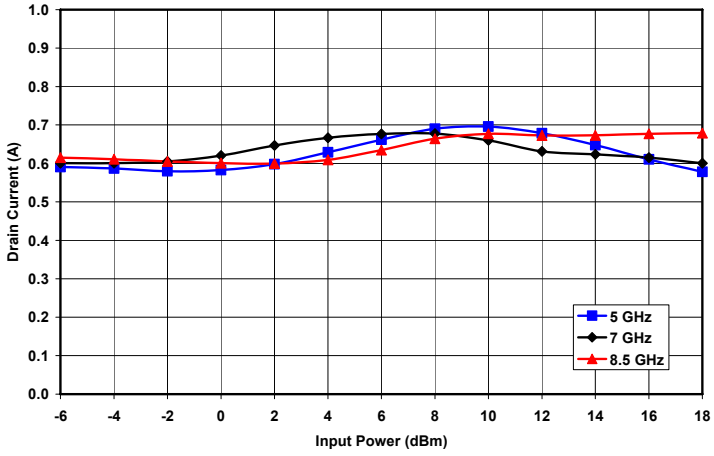


Figure 14. Drain Current vs. Input Power and Frequency at VD = 6V and IDQ = 600mA

VD = 8V

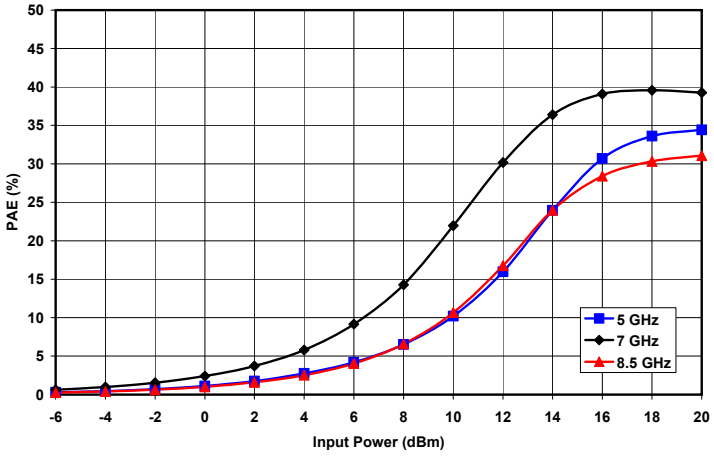


Figure 15. Power Added Efficiency vs. Input Power and Frequency at VD = 8V and IDQ = 600mA

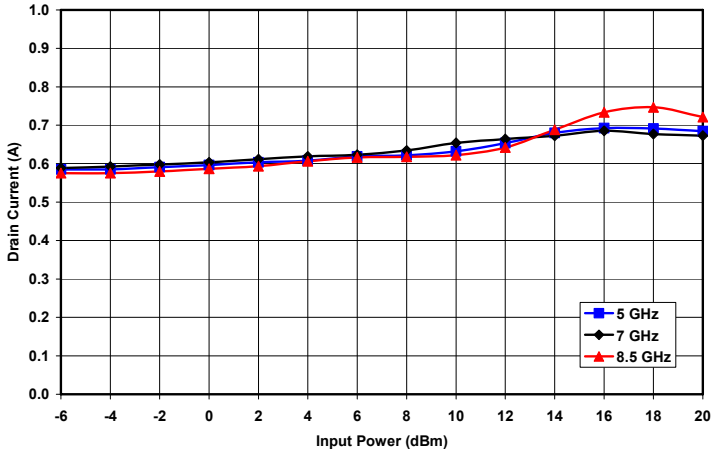


Figure 16. Drain Current vs. Input Power and Frequency at VD = 8V and IDQ = 600mA

VD = 10V

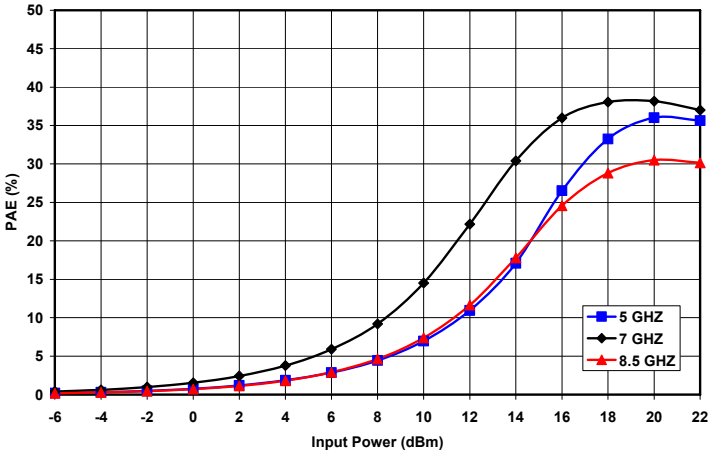


Figure 17. Power Added Efficiency vs. Input Power and Frequency at VD = 10V and IDQ = 600mA

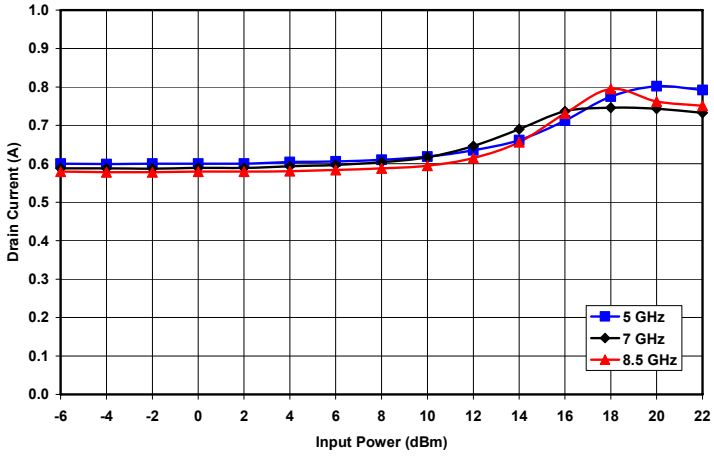


Figure 18. Drain Current vs. Input Power and Frequency at VD = 10V and IDQ = 600mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

VD = 6V

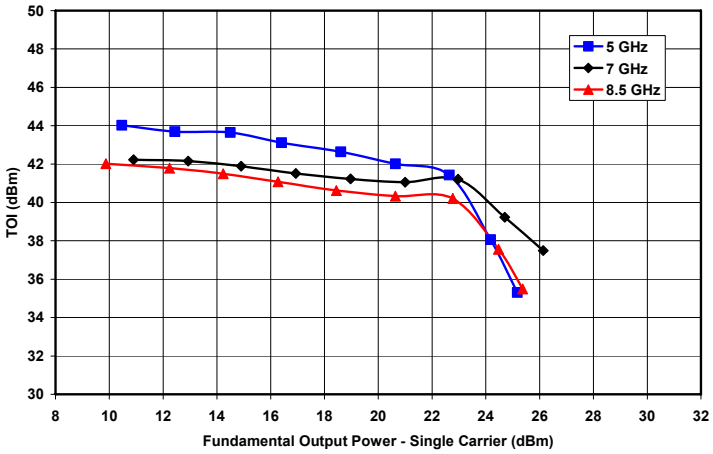


Figure 19. Third Order Intercept vs. Output Power and Frequency at VD = 6V and IDQ = 600mA

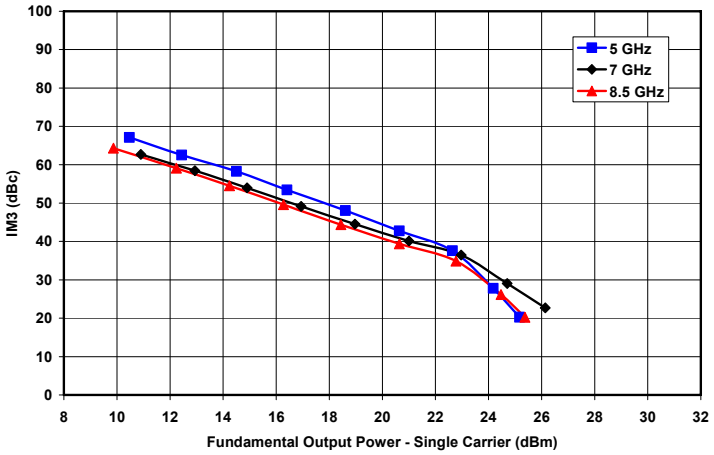


Figure 20. Third Order Intermod vs. Output Power and Frequency at VD = 6V and IDQ = 600mA

VD = 8V

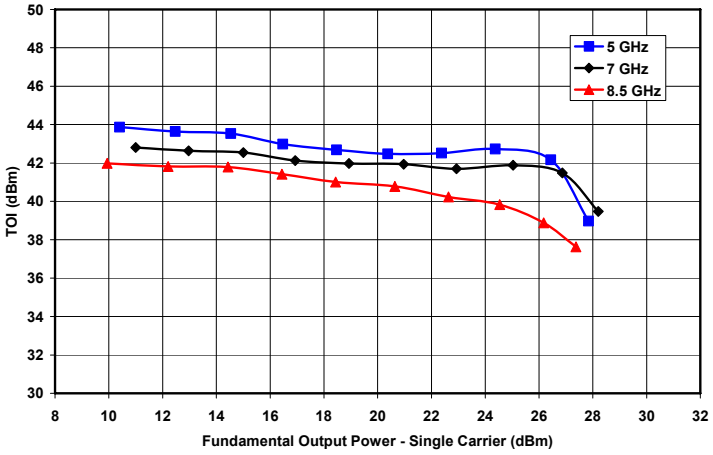


Figure 21. Third Order Intercept vs. Output Power and Frequency at VD = 8V and IDQ = 600mA

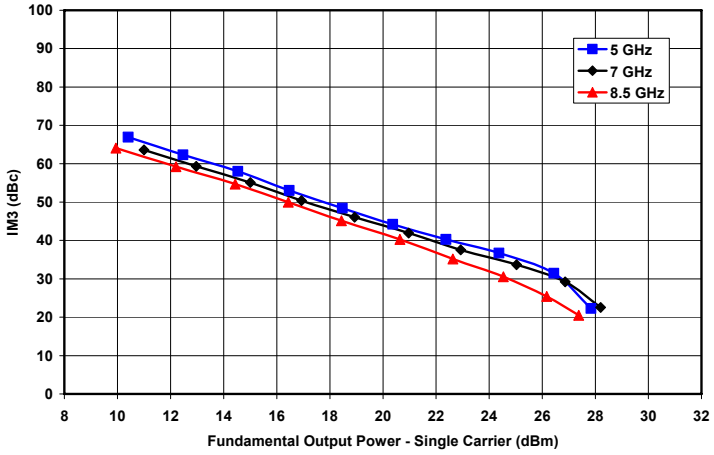


Figure 22. Third Order Intermod vs. Output Power and Frequency at VD = 8V and IDQ = 600mA

VD = 10V

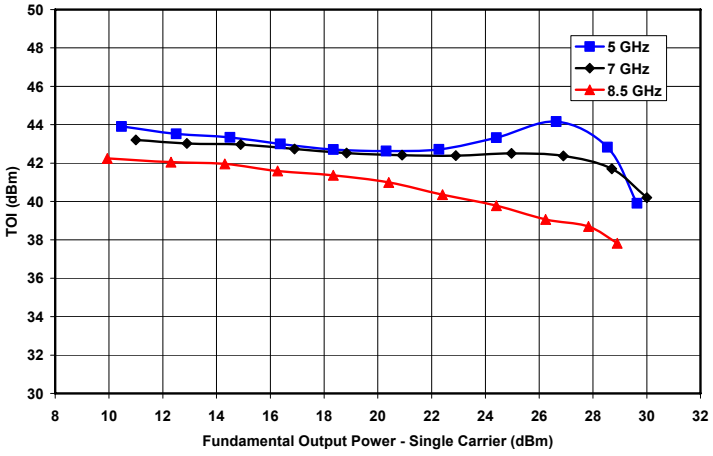


Figure 23. Third Order Intercept vs. Output Power and Frequency at VD = 10V and IDQ = 600mA

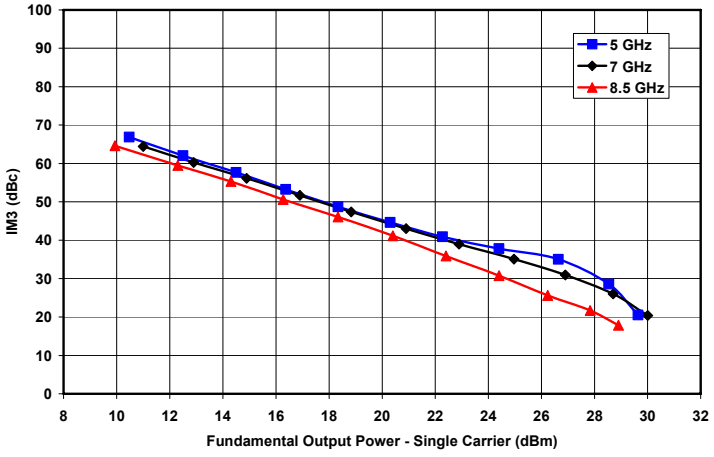


Figure 24. Third Order Intermod vs. Output Power and Frequency at VD = 10V and IDQ = 600mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

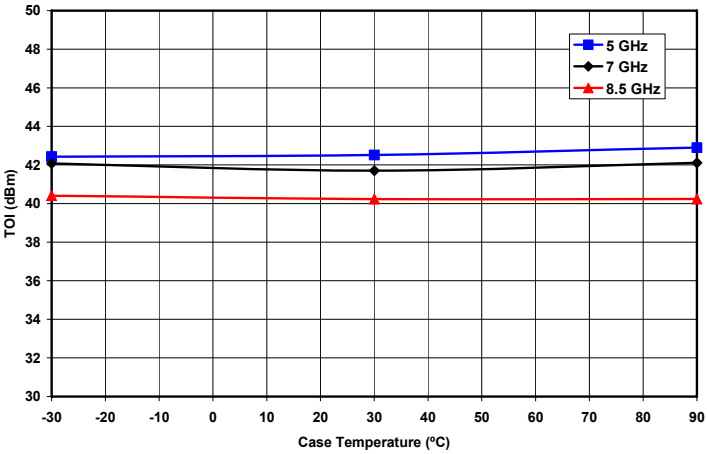


Figure 25. Third Order Intercept vs. Temperature and Frequency
at Single Carrier Output Power Level = 22dBm, VD = 8V and IDQ = 600mA

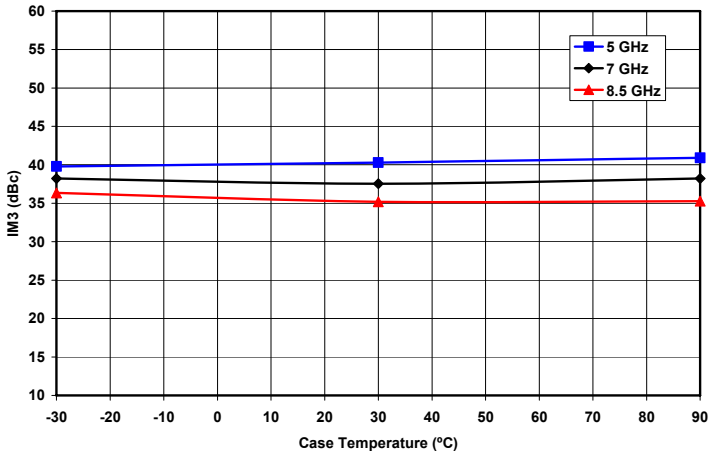


Figure 26. Third Order Intermod vs. Temperature and Frequency
at Single Carrier Output Power Level = 22dBm, VD = 8V and IDQ = 600mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

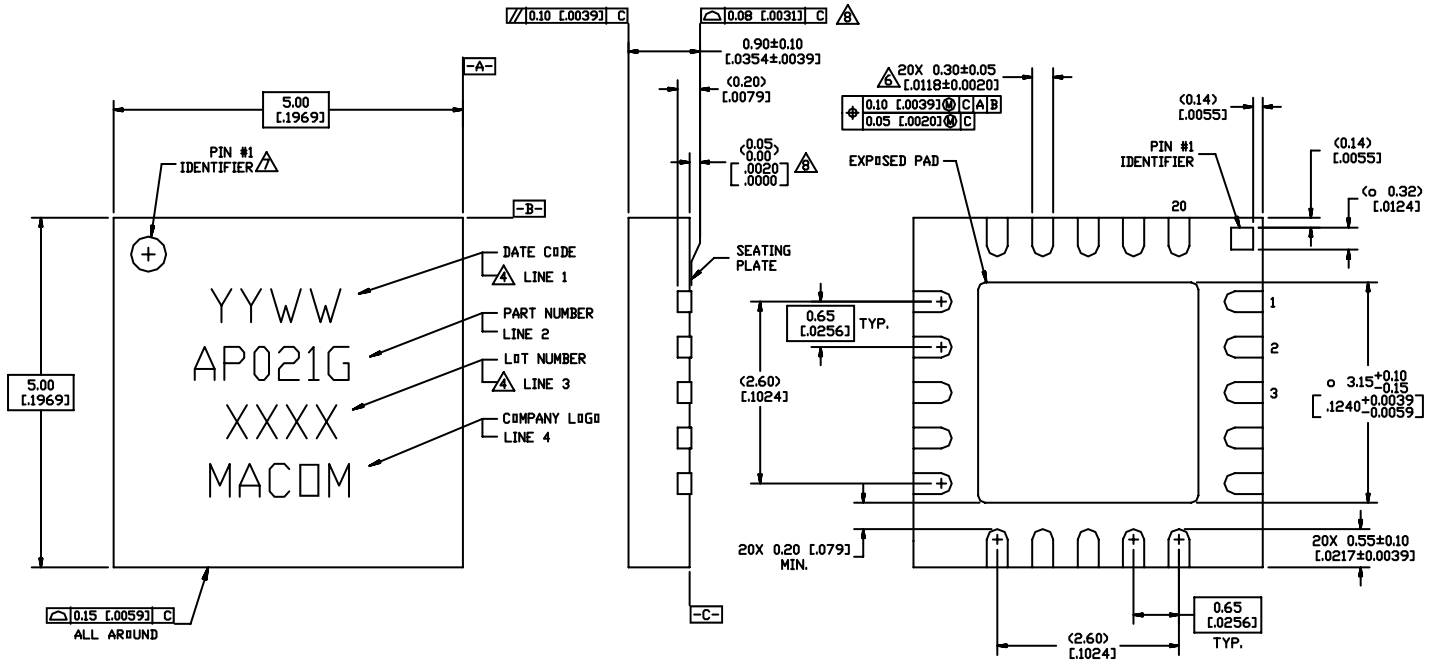


Figure 27. 5x5 mm 20-Lead MLP.

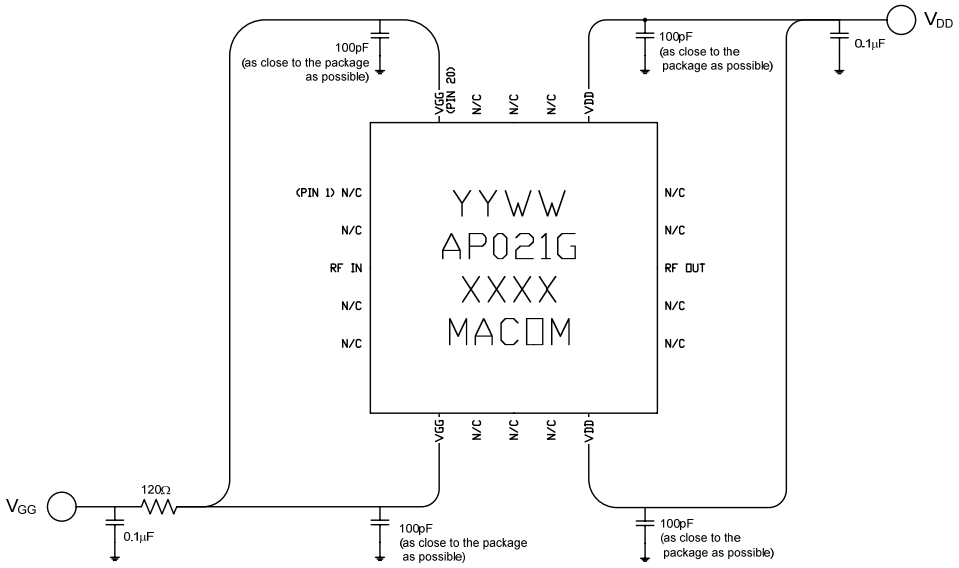


Figure 28. Recommended Bias Configuration.

Note: The exposed pad centered on the package bottom must be connected to RF and dc ground for proper electrical and thermal operation.

Refer to M/A-COM Application Note ***Surface Mounting Instructions for PQFN Packages #S2083**** for assembly guidelines.

Additional Precaution: All parts must receive a bake-out of 125ºC for 24 hours prior to any solder reflow operation.

*Application Notes can be found by going to the Site Search Page of M/A-COM's web page (http://www.macom.com/Application%20Notes/index.htm) and searching for the required Application Note.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

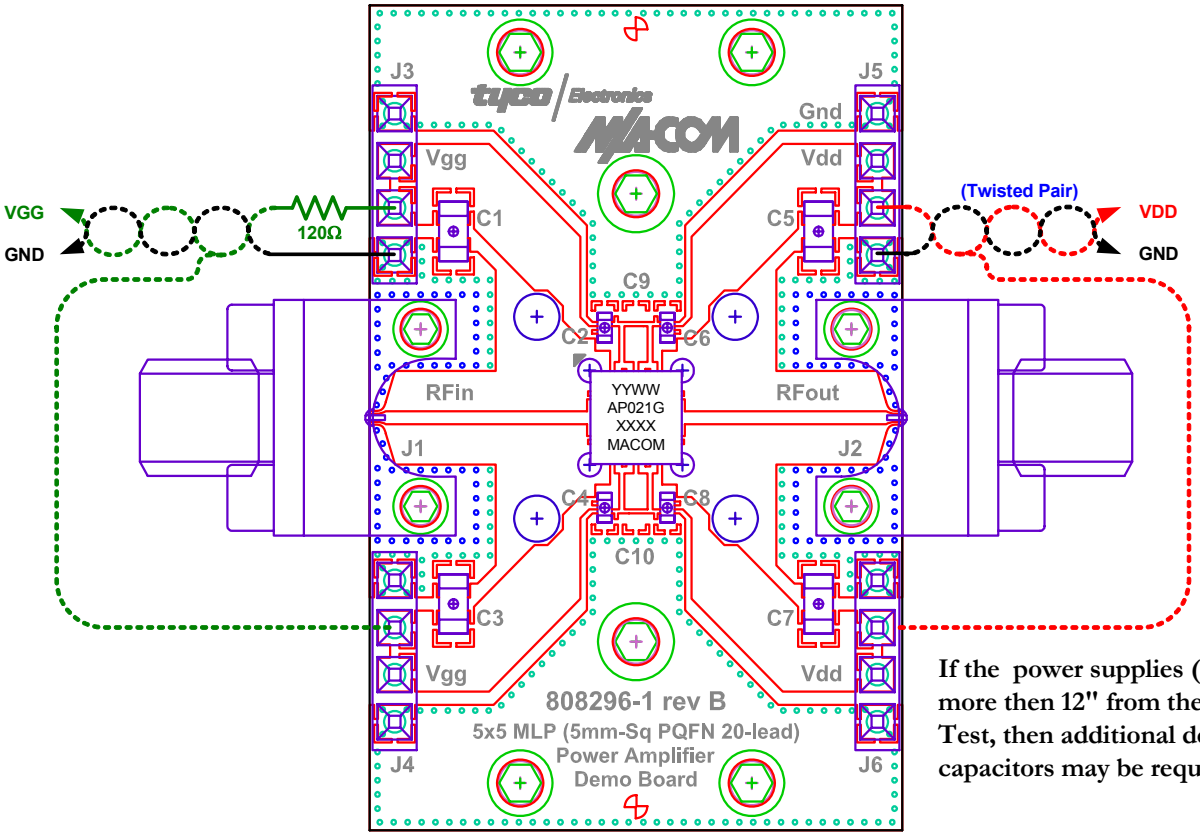


Figure 29. Demonstration Board PN MAAP-000021-SMB003 (available upon request).

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.