tyco Electronics

RoHS Compliant

MACOM

Digital Attenuator
15.0 dB, 4-Bit, TTL Driver, DC-3.0 GHz

MAATCC0008
V3


Features

- Attenuation: 1.0 dB steps to 15 dB
- Low DC Power Consumption
- Integral TTL Driver
- 50 Ohm Impedance
- Temperature Stability: ±0.18 dB from –40°C to +85°C Typ.
- Lead-Free SO-16 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of AT65-0413

Description

M/A-COM’s MAATCC0008 is a GaAs FET 4-bit digital attenuator with a 1.0 dB minimum step size and a 15 dB total attenuation range. This device is in a SOIC-16 plastic surface mount package. The MAATCC0008 is ideally suited for use where accuracy, fast speed, very low power consumption and low costs are required. Typical applications include dynamic range setting in precision receiver circuits and other gain/leveling control circuits.

Schematic with Off-Chip Components or Functional Block Diagram

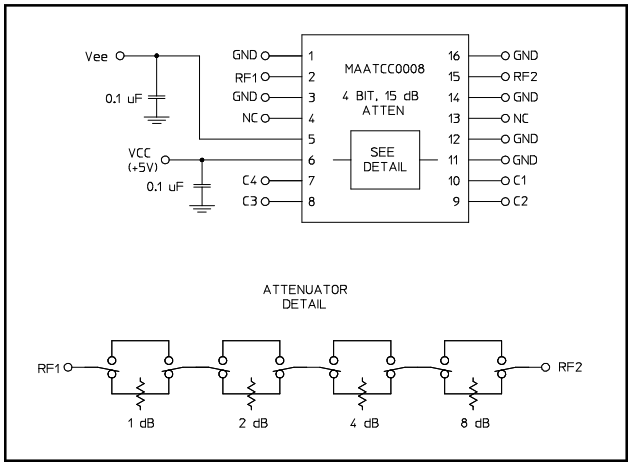

Ordering Information

Part Number	Package
MAATCC0008	Bulk Packaging
MAATCC0008TR	1000 piece reel
MAATCC0008-TB	Sample Test Board

Note: Reference Application Note M513 for reel size information.
Note: Die quantity varies.

Pin Configuration

Pin No.	Function	Pin No.	Function
1	GND	9	C2
2	RF1	10	C1
3	GND	11	GND
4	NC[1]	12	GND
5	Vee	13	NC[1]
6	Vcc	14	GND
7	C4	15	RF2
8	C3	16	GND

1. NC = No Connection

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

Digital Attenuator
15.0 dB, 4-Bit, TTL Driver, DC-3.0 GHz

MAATCC0008
V3

Electrical Specifications: T_A = 25°C


Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	—	DC - 0.5 GHz DC - 2.0 GHz DC - 3.0 GHz	dB dB dB	— — —	1.3 1.7 1.9	1.6 2.1 2.4
Attenuation Accuracy	Any Bit or Combination of Bits	DC - 3.0 GHz	dB	± (.25 + 3% of attenuation) or ± .55 dB	± (.25 + 3% of attenuation) or ± .55 dB	± (.25 + 3% of attenuation) or ± .55 dB
VSWR	Full Range	DC - 3.0 GHz	Ratio	—	—	1.6:1
Trise, Tfall Ton, Toff Transients	10% to 90% 50% Cntl to 90%/10% RF In-Band	10% to 90% 50% Cntl to 90%/10% RF In-Band	nS nS mV	— — —	10 30 35	50 150 —
1 dB Compression	Input Power Input Power	0.05 GHz 0.5 - 3.0 GHz	dBm dBm	— —	+20 +28	— —
Input IP_3	Two-tone inputs up to +5 dBm	0.05 GHz 0.5 - 3.0 GHz	dBm dBm	— —	+40 +50	— —
Input IP_2	Two-tone inputs up to +5 dBm	0.05 GHz 0.5 - 3.0 GHz	dBm dBm	— —	+45 +68	— —
Vcc V_{EE}	—	— —	V V	4.5 -8.0	5.0 -5.0	5.5 -4.75
V_{IL} V_{IH}	LOW-level input voltage HIGH-level input voltage	— —	V V	0.0 2.0	— —	0.8 5.0
Iin (Input Leakage Current)	Vin = V_{CC} or GND	—	uA	-1.0	—	1.0
Icc (Quiescent Supply Current)	Vcntrl = V_{CC} or GND	—	uA	—	250	400
ΔIcc (Additional Supply Current Per TTL Input Pin)	V_{CC} = Max, Vcntrl = V_{CC} - 2.1 V	—	mA	—	—	1.0
I_{EE}	V_{EE} min to max, Vin = V_{IL} or V_{IH}	—	mA	-1.0	-0.2	—

Absolute Maximum Ratings [2,3]

Parameter	Absolute Maximum
Max. Input Power 0.05 GHz 0.5 - 3.0 GHz	 +27 dBm +34 dBm
V_{CC}	-0.5V ≤ V_{CC} ≤ +7.0V
V_{EE}	-8.5V ≤ V_{EE} ≤ +0.5V
V_{CC} - V_{EE}	-0.5V ≤ V_{CC} - V_{EE} ≤ 14.5V
Vin[4]	-0.5V ≤ Vin ≤ V_{CC} + 0.5V
Operating Temperature	-40ºC to +85ºC
Storage Temperature	-65ºC to +125ºC

2. Exceeding any one or combination of these limits may cause permanent damage to this device.
3. M/A-COM does not recommend sustained operation near these survivability limits.
4. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

Recommended PCB Configuration

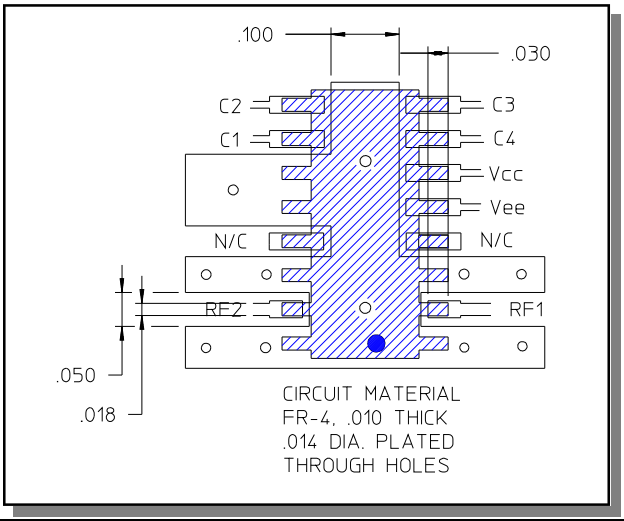

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.


Truth Table (Digital Attenuator)

C1	C2	C3	C4	Attenuation
0	0	0	0	Loss, Reference
1	0	0	0	1.0 dB
0	1	0	0	2.0 dB
0	0	1	0	4.0 dB
0	0	0	1	8.0 dB
1	1	1	1	15.0 dB


0 = TTL Low; 1 = TTL High

Typical Performance Curves


Typical Insertion Loss (dB)

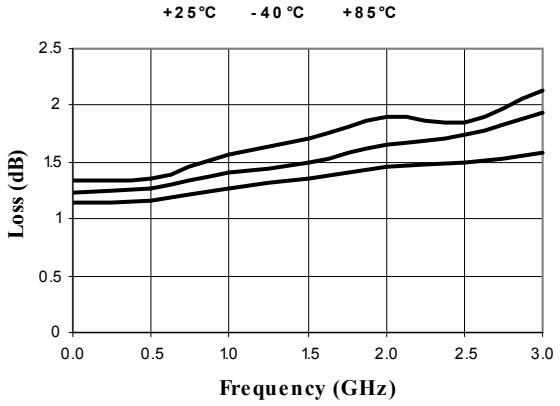


Attenuation Accuracy @ +25ºC

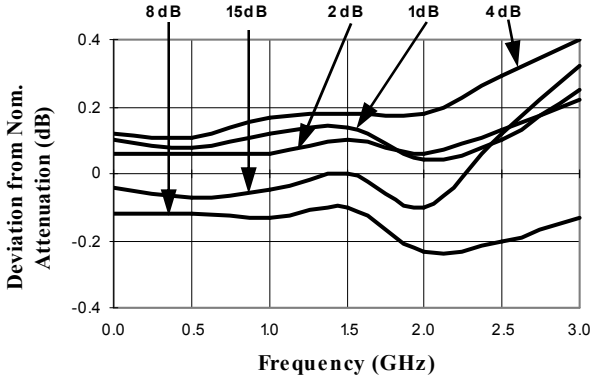

Attenuation Accuracy @ -40ºC

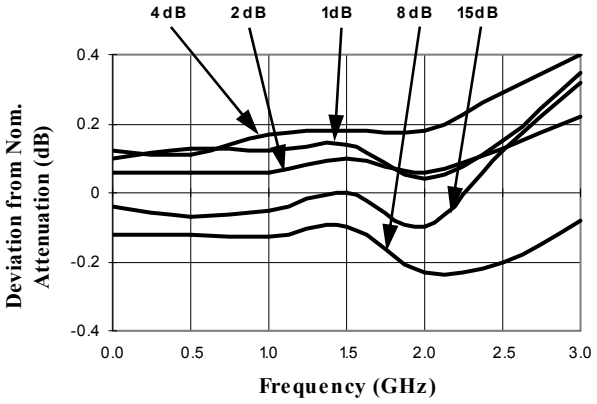

Attenuation Accuracy @ +85ºC

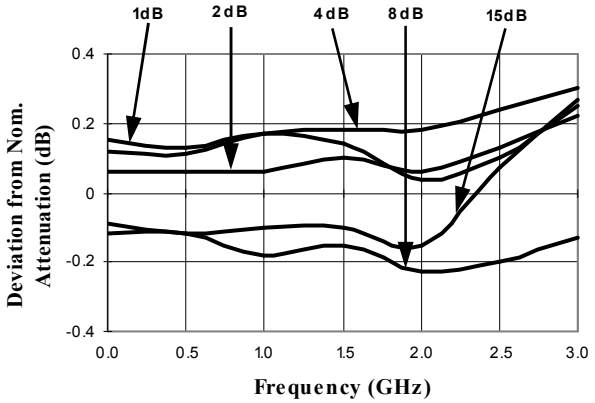


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298


Visit www.macom.com for additional data sheets and product information.

Typical Performance Curves


RF1 VSWR vs. Frequency

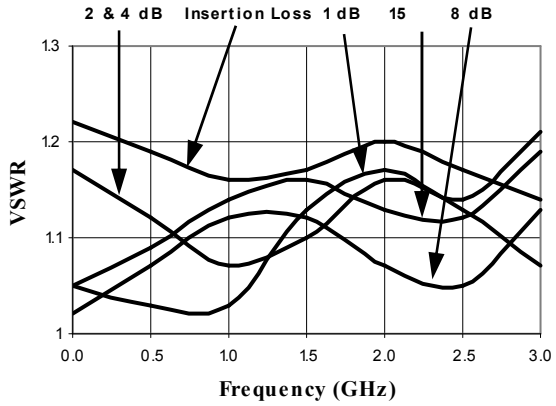

RF 2 VSWR vs. Frequency

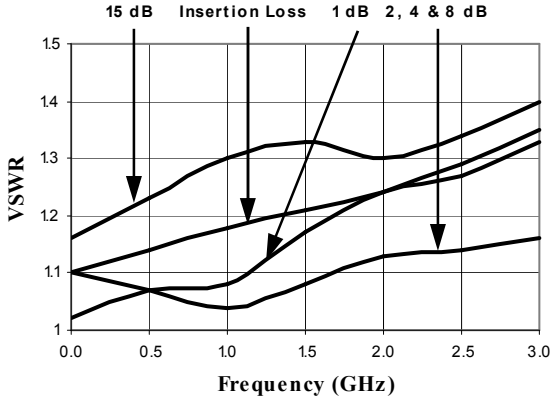

Lead-Free, SO-16†

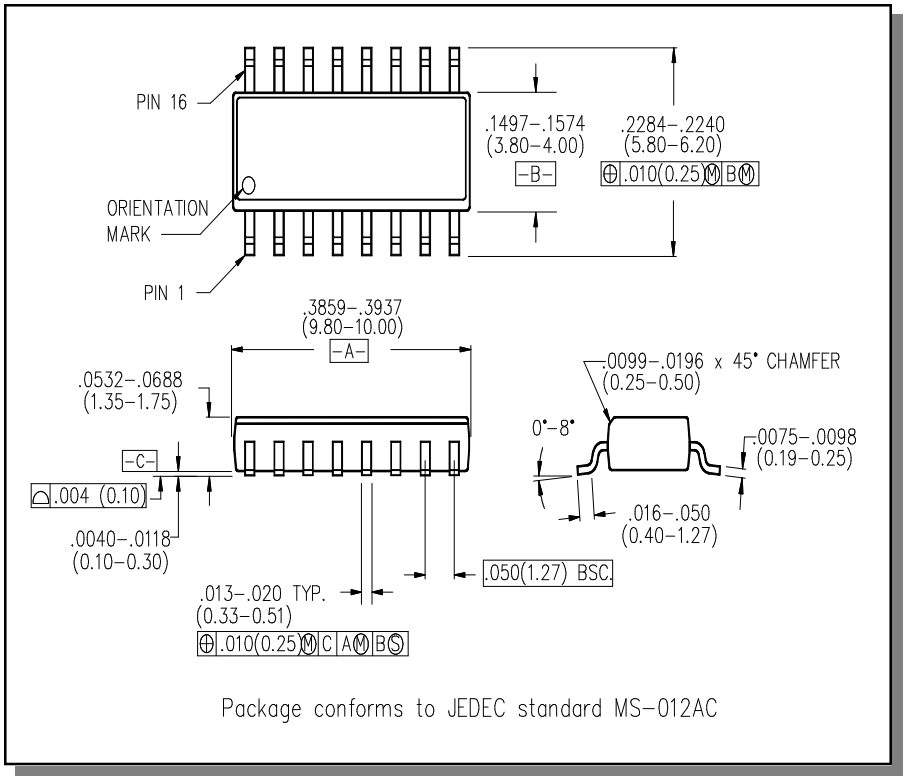

† Reference Application Note M538 for lead-free solder reflow recommendations.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.