19-1826; Rev 2; 9/01

EVALUATION KIT AVAILABLE

Upstream CATV Amplifiers

General Description

The MAX3514/MAX3516/MAX3517 programmable-gain amplifiers are designed for use in CATV upstream applications. The MAX3514/MAX3517 drive up to +61dBmV (QPSK) into a 75Ω load when driven with a +34dBmV nominal input signal. The MAX3516 drives up to +64dBmV (QPSK). Both input and output ports are differential, requiring that an external balun be used at the output port. The variable gain feature provides greater than 56dB of dynamic range, which is controlled by an SPI™ 3-wire interface. Gain control is available in 0.5dB steps. The devices operate over a frequency range of 5MHz to 65MHz.

The MAX3514 is a pin-for-pin compatible upgrade for the MAX3510. Like the MAX3510, the MAX3514 is internally matched for use with a 2:1 (voltage ratio) balun. The MAX3517 utilizes an external output resistor for greater load-matching flexibility, and offers the same performance as the MAX3514. The MAX3516 is a higher power version of the MAX3514 with 3dB more gain and output power capability, and is offered in a smaller thermally enhanced TSSOP-EP package.

These devices operate from a single +5VDC supply and draw 120mA during transmit (100% duty cycle, +61dBmV out). The MAX3516 can be operated at up to +9VDC supply for improved harmonic distortion performance. The bias current is automatically adjusted based on the output level to increase efficiency. Additionally, the devices are shut off between bursts to minimize noise and save power while still maintaining a match at the output port. Shutdown mode disables all circuitry and reduces current consumption to 10µA (typ).

The MAX3514/MAX3517 are available in a 20-pin QSOP package and the MAX3516 is available in a 20-pin TSSOP-EP package. All devices operate in the extended industrial temperature range (-40°C to +85°C).

Applications

DOCSIS™/EuroDOCSIS™ and DVB Cable Modems

OpenCable™ Set-Top Box

Telephony over Cable

CATV Status Monitor

Typical Operating Circuit appears at end of data sheet.

SPI is a trademark of Motorola Corp.

DOCSIS/EuroDOCSIS/OpenCable are trademarks of CableLabs.

Features

- **Accurate Gain Control**
- **Gain Programmable in 0.5dB Steps**
- **56dB of Gain Control Range**
- **-55dBc Harmonic Distortion at 65MHz Input**
- **Low Burst On/Off Transient**
- **High Efficiency:**
  35mA at +34dBmV Out
  8mA Transmit Disable Mode

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX3514EEP	-40°C to +85°C	20 QSOP
MAX3516EUP	-40°C to +85°C	20 TSSOP-EP*
MAX3517EEP	-40°C to +85°C	20 QSOP

**Exposed paddle*

Pin Configuration

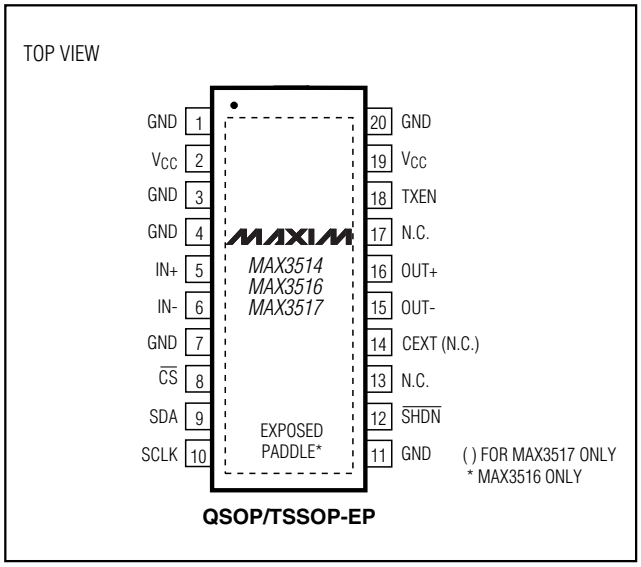

QSOP/TSSOP-EP

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

ABSOLUTE MAXIMUM RATINGS

V_{CC}, OUT+, OUT-.....-0.3V to +10.0V
Input Voltage Levels (all inputs).....-0.3V to (V_{CC} + 0.3V)
Continuous Input Voltage (IN+, IN-).....2Vp-p
Continuous Current (OUT+, OUT-).....120mA
Continuous Power Dissipation (T_A = +70°C)
20-Pin QSOP (derate 12.3mW/°C above T_A = +70°C). .988mW
20-Pin TSSOP-EP
(derate 27mW/°C above T_A = +70°C) 2200mW

Operating Temperature Range ..... -40°C to +85°C
Junction Temperature..... +150°C
Storage Temperature Range ..... -65°C to +150°C
Lead Temperature (soldering, 10s)..... +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS—MAX3514/MAX3516/MAX3517

(Typical operating circuit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V_{CC}		4.75		5.25	V
Supply Current Transmit Mode (MAX3514/MAX3517)	I_{CC}	D7 = 1, gain code = 125 (A_V = 27dB)		120	150	mA
		D7 = 0, gain code = 100 (A_V = 0dB)		35		
Supply Current Transmit Mode (MAX3516)	I_{CC}	D7 = 1, gain code = 125 (A_V = 31dB)		160	195	mA
		D7 = 0, gain code = 94 (A_V = 0.5dB)		30		
Supply Current Transmit Disable Mode	I_{CC}	TXEN = low		8	12	mA
Supply Current Low-Power Standby	I_{CC}	$\overline{SHDN}$ = low		10		µA
LOGIC INPUTS						
Input High Voltage	V_{INH}		2.0			V
Input Low Voltage	V_{INL}				0.8	V
Input High Current	I_{BIASH}	V_{INH} = +3.6V			100	µA
Input Low Current	I_{BIASL}	V_{INL} = 0	-100			µA

AC ELECTRICAL CHARACTERISTICS—MAX3514

(MAX3514 EV kit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, P_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Voltage Gain, f_{IN} = 5MHz (Note 2)	A_V	D7 = 1, gain code = 125, T_A = 0°C to +85°C	26.7	27.7	28.7	dB
		D7 = 1, gain code = 110, T_A = 0°C to +85°C	19.2	20.2	21.2	
		D7 = 1, gain code = 87, T_A = 0°C to +85°C	7.7	8.7	9.7	
		D7 = 0, gain code = 115, T_A = 0°C to +85°C	6.7	7.7	8.7	
		D7 = 0, gain code = 100, T_A = 0°C to +85°C	-0.8	0.2	1.2	
		D7 = 0, gain code = 80, T_A = 0°C to +85°C	-10.8	-9.8	-8.8	
		D7 = 0, gain code = 60, T_A = 0°C to +85°C	-20.8	-19.8	-18.8	
		D7 = 0, gain code = 48, T_A = 0°C to +85°C	-27.0	-26.0	-25.0	
Voltage Gain, f_{IN} = 65MHz	A_V	D7 = 1, gain code = 127, T_A = -40°C to +85°C; Notes 3, 4	26.3			dB
Gain Rolloff		V_{OUT} = 61dBmV, f_{IN} = 5MHz to 42MHz (Notes 3, 4)		-0.3	-0.5	dB
		V_{OUT} = 61dBmV, f_{IN} = 5MHz to 65MHz (Notes 3, 4)		-1.0	-1.5	
Gain Step Size		f_{IN} = 5MHz to 65MHz, A_V = -26dB to +27dB		0.5		dB
		f_{IN} = 5MHz to 65MHz, A_V = -26dB to +27dB, any 2-bit transition of D0, D1	0.7	1	1.3	
		f_{IN} = 5MHz to 65MHz, D7 = 0, gain code = 115; to D7 = 1, gain code = 87	0.7	1.0	1.3	
Transmit-Disable Mode Noise		TXEN = low, BW = 160kHz, f_{IN} = 5MHz to 65MHz; Note 3			-71	dBmV
Isolation in Transmit-Disable Mode		TXEN = low, f_{IN} = 5MHz to 65MHz (Note 3)	60			dB
Transmit Mode Noise		BW = 160kHz, f_{IN} = 5MHz to 65MHz, A_V = -26dB to +27dB; Note 3			-59	dBc
Transmit Enable Transient Duration		TXEN input rise/fall time < 0.1µs, T_A = +25°C (Note 3)			2	µs
Transmit Disable Transient Duration		TXEN input rise/fall time < 0.1µs, T_A = +25°C (Note 3)			2	µs
Transmit Disable/Transmit Enable Transient Step Size		D7 = 1, gain code = 125 (A_V = 27dB), T_A = +25°C		30	100	mVp-p
		D7 = 0, gain code = 100 (A_V = 0.2dB), T_A = +25°C		1		
Input Impedance	Z_{IN}	f_{IN} = 5MHz to 65MHz, single ended; Note 3	1	1.5		kΩ
Output Return Loss		f_{IN} = 5MHz to 42MHz in 75Ω system, D7 = 1 gain code = 125 (A_V = 27dB) (Note 4)		10		dB

AC ELECTRICAL CHARACTERISTICS—MAX3514 (continued)

(MAX3514 EV kit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, P_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Return Loss in Transmit-Disable Mode		f_{IN} = 5MHz to 42MHz, in 75Ω system, TXEN = low; Note 4		10		dB
Two-Tone Third-Order Distortion	IM3	Input tones at 42MHz and 42.2MHz, both +31dBmV, V_{OUT} = +58dBmV/tone; Note 3		-53	-47	dBc
		Input tones at 65MHz and 65.2MHz, both +31dBmV, V_{OUT} = +58dBmV/tone		-49		
2nd-Harmonic Distortion	HD2	f_{IN} = 33MHz, V_{OUT} = +61dBmV; Note 3		-55	-53	dBc
		f_{IN} = 65MHz, V_{OUT} = +61dBmV; Note 3		-55	-52	
3rd-Harmonic Distortion	HD3	f_{IN} = 22MHz, V_{OUT} = +61dBmV		-55	-50.5	dBc
		f_{IN} = 65MHz, V_{OUT} = +61dBmV		-55	-50.5	
AM to AM	AM/AM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 42MHz		0.1		dB
		A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 65MHz		0.1		
AM to PM	AM/PM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 42MHz		1		degrees
		A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 65MHz		1		

AC ELECTRICAL CHARACTERISTICS—MAX3516

(MAX3516 EV kit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, P_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Voltage Gain, f_{IN} = 5MHz (Note 2)	A_V	D7 = 1, gain code = 125, T_A = 0°C to +85°C	30	31	32	dB
		D7 = 1, gain code = 119, T_A = 0°C to +85°C	27	28	29	
		D7 = 1, gain code = 104, T_A = 0°C to +85°C	19.5	20.5	21.5	
		D7 = 1, gain code = 81, T_A = 0°C to +85°C	8	9	10	
		D7 = 0, gain code = 109, T_A = 0°C to +85°C	7	8	9	
		D7 = 0, gain code = 94, T_A = 0°C to +85°C	-0.5	0.5	1.5	
		D7 = 0, gain code = 74, T_A = 0°C to +85°C	-10.5	-9.5	-8.5	
		D7 = 0, gain code = 54, T_A = 0°C to +85°C	-20.5	-19.5	-18.5	
		D7 = 0, gain code = 42, T_A = 0°C to +85°C	-26.5	-25.5	-24.5	
Voltage Gain, f_{IN} = 65MHz	A_V	D7 = 1, gain code = 127, T_A = -40°C to +85°C (Notes 3, 4)	28.1			dB
Gain Rolloff		V_{OUT} = 64dBmV, f_{IN} = 5MHz to 42MHz (Notes 3, 4)		-0.3	-0.6	dB
		V_{OUT} = 64dBmV, f_{IN} = 5MHz to 65MHz (Notes 3, 4)		-1.1	-1.7	
Gain Step Size		f_{IN} = 5MHz to 65MHz, A_V = -26dB to +30dB		0.5		dB
		f_{IN} = 5MHz to 65MHz, A_V = -26dB to +30dB, any 2-bit transition of D0, D1	0.7	1.0	1.3	
		f_{IN} = 5MHz to 42MHz, A_V = -26dB to +30dB, D7 = 0, gain code = 109; to D7 = 1, gain code = 81	0.7	1.0	1.3	
Transmit-Disable Mode Noise		TXEN = low, BW = 160kHz, f_{IN} = 5MHz to 65MHz			-71	dBmV
Isolation in Transmit-Disable Mode		TXEN = low, f_{IN} = 5MHz to 65MHz (Note 3)	60			dB
Transmit Mode Noise		BW = 160kHz, f_{IN} = 5MHz to 65MHz, A_V = -26dB to 27dB (Note 3)			-59	dBc

AC ELECTRICAL CHARACTERISTICS—MAX3516 (continued)

(MAX3516 EV kit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, P_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Transmit Enable Transient Duration		TXEN input rise/fall time < 0.1µs, T_A = +25°C (Note 3)			2	µs
Transmit Disable Transient Duration		TXEN input rise/fall time < 0.1µs, T_A = +25°C (Note 3)			2	µs
Transmit Disable/Transmit Enable Transient Step Size		D7 = 1, gain code = 119, (A_V = 28dB), T_A = +25°C		30	100	mVp-p
		D7 = 0, gain code = 94, (A_V = 0.5 dB), T_A = +25°C		1		
Input Impedance	Z_{IN}	f_{IN} = 5MHz to 65MHz, single-ended (Note 3)	1	1.5		kΩ
Output Return Loss		f_{IN} = 5MHz to 65MHz in 75Ω system D7 = 1, gain code = 125, (A_V = 31dB) (Note 4)		10		dB
Output Return Loss in Transmit-Disable Mode		f_{IN} = 5MHz to 65MHz in 75Ω system, TXEN = low (Note 4)		10		dB
Two-Tone Third-Order Distortion (Note 3)	IM3	Input tones at 42MHz and 42.2MHz, both +31dBmV, V_{OUT} = +58dBmV/tone		-53.5		dBc
		Input tones at 65MHz and 65.2MHz, both +31dBmV, V_{OUT} = +58dBmV/tone		-48.8		
2nd-Harmonic Distortion (Note 3)	HD2	f_{IN} = 33MHz, V_{OUT} = +61dBmV		-55	-53	dBc
		f_{IN} = 33MHz, V_{OUT} = +64dBmV		-55		
		f_{IN} = 65MHz, V_{OUT} = +61dBmV		-55	-52	
3rd-Harmonic Distortion	HD3	f_{IN} = 22MHz, V_{OUT} = +61dBmV		-55	-50.5	dBc
		f_{IN} = 22MHz, V_{OUT} = +64dBmV		-50		
		f_{IN} = 65MHz, V_{OUT} = +61dBmV		-55	-50.5	
AM to AM	AM/AM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 42MHz		0.1		dB
AM to AM	AM/AM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 65MHz		0.1		dB
AM to PM	AM/PM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 42MHz		1		degrees
AM to PM	AM/PM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 65MHz		1		degrees

AC ELECTRICAL CHARACTERISTICS—MAX3517

(MAX3517 EV kit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, P_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Voltage Gain, f_{IN} = 5MHz	A_V	D7 = 1, gain code = 125, T_A = 0°C to +85°C	26.7	27.7	28.7	dB
		D7 = 1, gain code = 110, T_A = 0°C to +85°C	19.2	20.2	21.2	
		D7 = 1, gain code = 90, T_A = 0°C to +85°C	9.2	10.2	11.2	
		D7 = 1, gain code = 70, T_A = 0°C to +85°C	-0.8	0.2	1.2	
		D7 = 1, gain code = 115, T_A = 0°C to +85°C	6.7	7.7	8.7	
		D7 = 1, gain code = 100, T_A = 0°C to +85°C	-0.8	0.2	1.2	
		D7 = 1, gain code = 80, T_A = 0°C to +85°C	-10.8	-9.8	-8.8	
		D7 = 0, gain code = 60, T_A = 0°C to +85°C	-20.8	-19.8	-18.8	
		D7 = 0, gain code = 48, T_A = 0°C to +85°C	-27.0	-26.0	-25.0	
Gain Step Size		f_{IN} = 5MHz to 65MHz, A_V = -26dB to +27dB		0.5		dB
Transmit-Disable Mode Noise		TXEN = low, BW = 160kHz, f_{IN} = 5MHz to 65MHz		-71		dBmV
Isolation in Transmit-Disable Mode		TXEN = low, f_{IN} = 5MHz to 65MHz	50	58		dB
Transmit Mode Noise		BW = 160kHz, f_{IN} = 5MHz to 65MHz, A_V = -26dB to +27dB; Note 3		-60	-59	dBc
Transmit Enable Transient Duration		TXEN input rise/fall time < 0.1µs, T_A = +25°C; Note 3			2	µs

AC ELECTRICAL CHARACTERISTICS—MAX3517 (continued)

(MAX3517 EV kit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, P_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Transmit Disable Transient Duration		TXEN input rise/fall time < 0.1µs, T_A = +25°C			2	µs
Transmit Disable/Transmit Enable Transient Step Size		D7 = 1, gain code = 125, (A_V = 27dB), T_A = +25°C		30	100	mVp-p
		D7 = 0, gain code = 100, (A_V = 0.2 dB), T_A = +25°C		1		
Input Impedance	Z_{IN}	f_{IN} = 5MHz to 65MHz, single ended; Note 3	1	1.5		kΩ
Output Return Loss		f_{IN} = 5MHz to 65MHz in 75Ω system D7 = 1, gain code = 125, (A_V = 27dB); Note 4		8.3		dB
Output Return Loss in Transmit-Disable Mode		f_{IN} = 42MHz, in 75Ω system TXEN = low; Note 4		10.5		dB
Two-Tone Third-Order Distortion (Note 2)	IM3	Input tones at 42MHz and 42.2MHz, both +31dBmV, V_{OUT} = +58dBmV/tone		-49.5		dBc
		Input tones at 65MHz and 65.2MHz, both +31dBmV, V_{OUT} = +58dBmV/tone		-46.3		
2nd-Harmonic Distortion	HD2	f_{IN} = 33MHz, V_{OUT} = +61dBmV		-55		dBc
		f_{IN} = 65MHz, V_{OUT} = +61dBmV		-55		
3rd-Harmonic Distortion	HD3	f_{IN} = 22MHz, V_{OUT} = +61dBmV		-55		dBc
		f_{IN} = 65MHz, V_{OUT} = +61dBmV		-55		
AM to AM	AM/AM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 42MHz		0.1		dB
AM to AM	AM/AM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 65MHz		0.1		dB
AM to PM	AM/PM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 42MHz		1		degrees
AM to PM	AM/PM	A_V = 27dB, V_{IN} = +34dBmV to +38dBmV, f_{IN} = 65MHz		1		degrees

TIMING CHARACTERISTICS

(V_{CC} = 4.75V to 5.25V, V_{GND} = 0, TXEN = $\overline{SHDN}$ = high, D7 = X, T_A = +25°C, unless otherwise specified.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SEN to SCLK Setup Time	t_{SENS}		20			ns
SEN to SCLK Hold Time	t_{SENH}		10			ns
SDA to SCLK Setup Time	t_{SDAS}		10			ns
SDA to SCLK Hold Time	t_{SDAH}		20			ns
SDA Pulse Width High	T_{DATAH}		50			ns
SDA Pulse Width Low	T_{DATAL}		50			ns
SCLK Pulse Width High	t_{SCLKH}		50			ns
SCLK Pulse Width Low	t_{SCLKL}		50			ns

Note 1: Guaranteed by design and characterization to ±3 sigma for T_A < +25°C, unless otherwise specified.
Note 2: AC Gain correlated to DC Gain measurements to ±3 sigma.
Note 3: Guaranteed by design and characterization to ±6 sigma.
Note 4: Does not include output matching; see Output Match in the *Applications* section.

Typical Operating Characteristics

(Typical operating circuit; V_{CC} = +5V, V_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, f_{IN} = 20MHz, Z_{LOAD} = 75Ω, T_A = +25°C, unless otherwise noted.)

MAX3514/MAX3517

SUPPLY CURRENT vs. TEMPERATURE

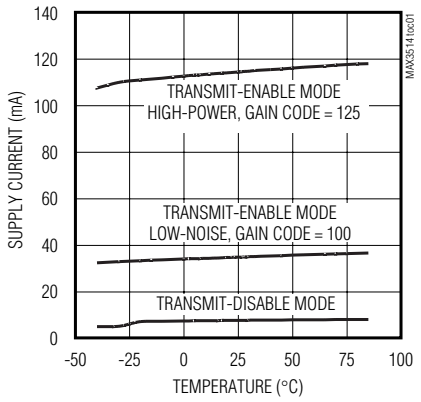

SUPPLY CURRENT vs. GAIN CODE

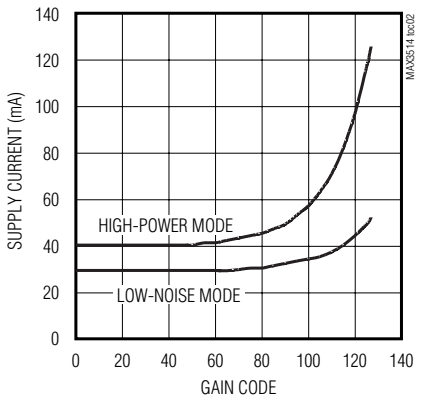

VOLTAGE GAIN vs. SUPPLY VOLTAGE HIGH-POWER MODE

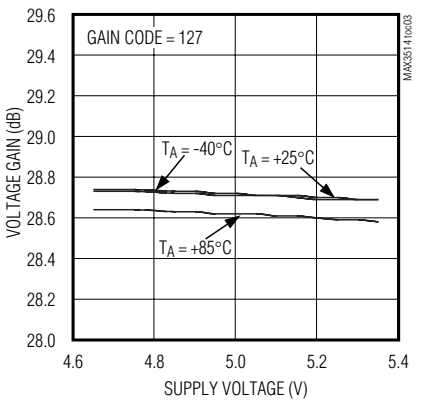

Typical Operating Characteristics (continued)

(Typical operating circuit; V_{CC} = +5V, V_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, f_{IN} = 20MHz, Z_{LOAD} = 75Ω, T_A = +25°C, unless otherwise noted.)

MAX3514/MAX3517 (continued)

VOLTAGE GAIN vs. SUPPLY VOLTAGE LOW-NOISE MODE

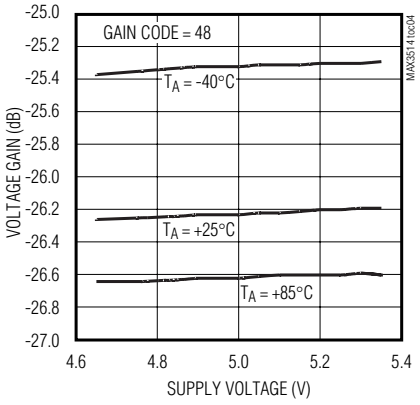

VOLTAGE GAIN vs. TEMPERATURE HIGH-POWER MODE

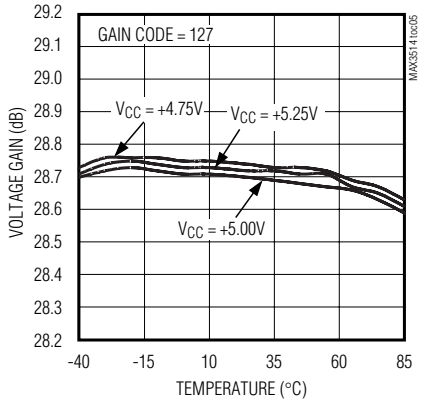

VOLTAGE GAIN vs. TEMPERATURE LOW-NOISE MODE

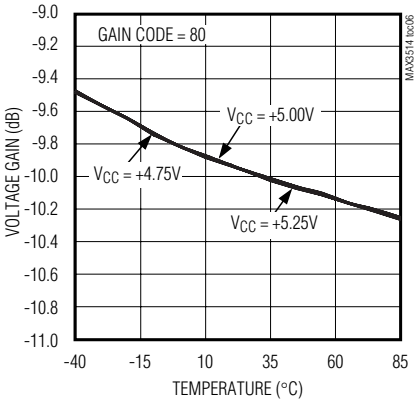

VOLTAGE GAIN vs. FREQUENCY HIGH-POWER MODE

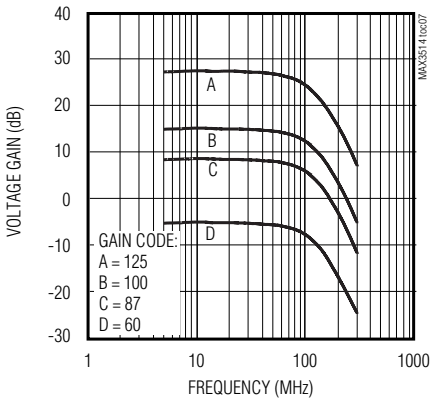

VOLTAGE GAIN vs. FREQUENCY LOW-NOISE MODE

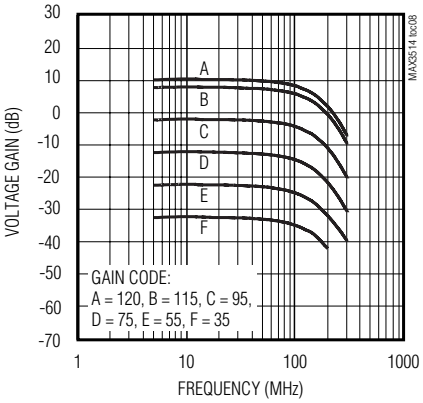

VOLTAGE GAIN vs. GAIN CODE

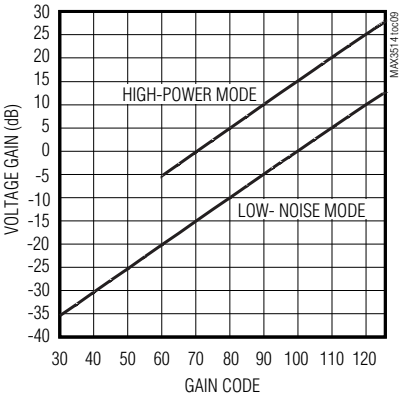

GAIN STEP vs. GAIN CODE HIGH-POWER MODE

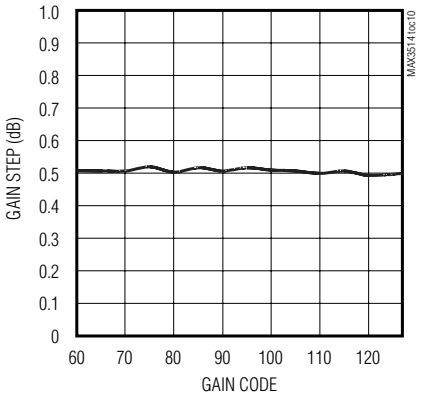

GAIN STEP vs. GAIN CODE LOW-NOISE MODE

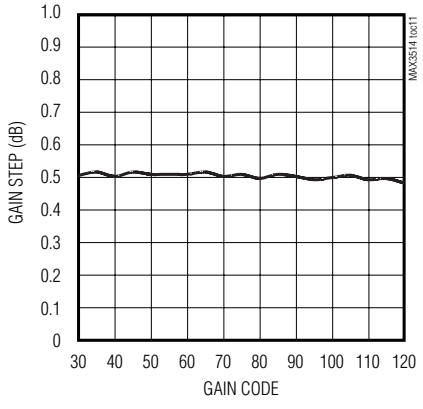

TRANSMIT NOISE vs. GAIN CODE

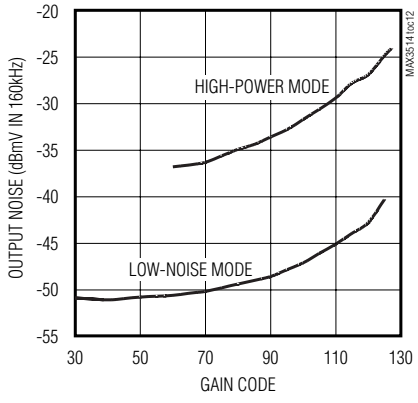

Typical Operating Characteristics (continued)

(Typical operating circuit; V_{CC} = +5V, V_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, f_{IN} = 20MHz, Z_{LOAD} = 75Ω, T_A = +25°C, unless otherwise noted.)

MAX3514/MAX3517 (continued)

2ND HARMONIC DISTORTION vs. INPUT FREQUENCY

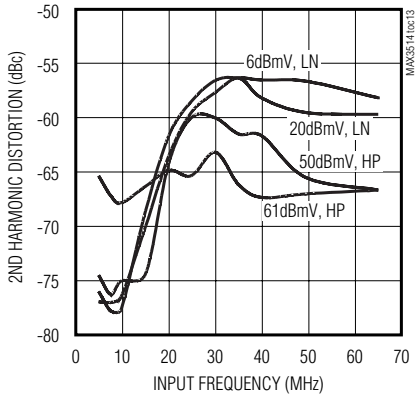

3RD HARMONIC DISTORTION vs. INPUT FREQUENCY

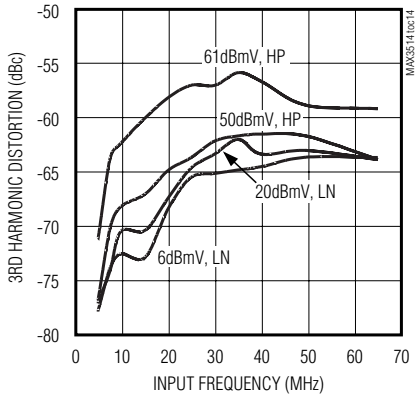

POWER-UP/DOWN TRANSIENTS vs. GAIN CODE

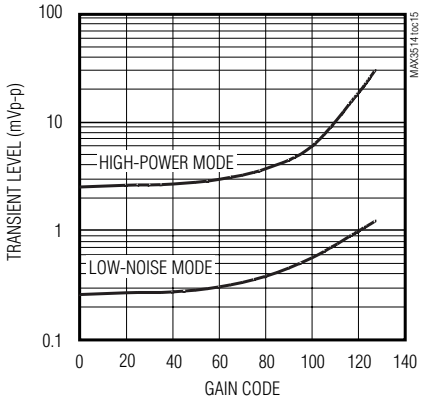

OUTPUT RETURN LOSS vs. FREQUENCY (75Ω SYSTEM)

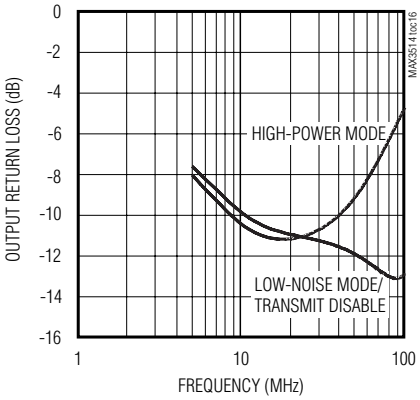

OUTPUT IMPEDANCE (75Ω SYSTEM)

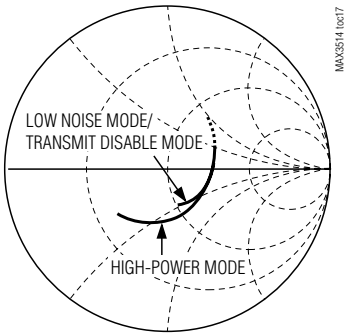

OUTPUT SPECTRUM

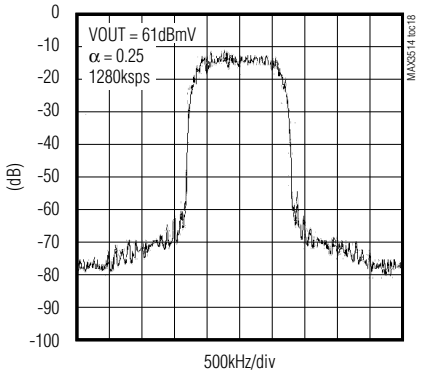

OUTPUT SPECTRUM

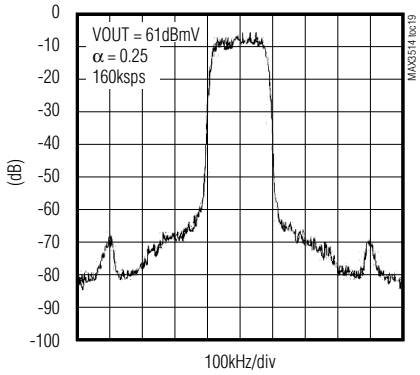

OUTPUT SPECTRUM

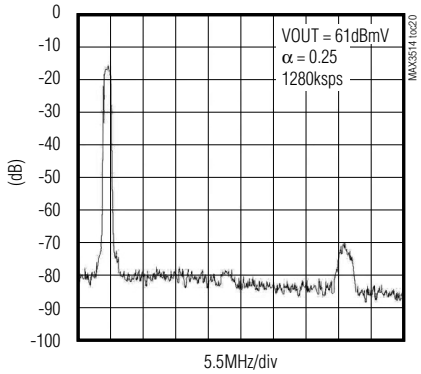

Typical Operating Characteristics (continued)

(Typical operating circuit; V_{CC} = +5V, V_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, f_{IN} = 20MHz, Z_{LOAD} = 75Ω, T_A = +25°C, unless otherwise noted.)

MAX3516

SUPPLY CURRENT vs. TEMPERATURE

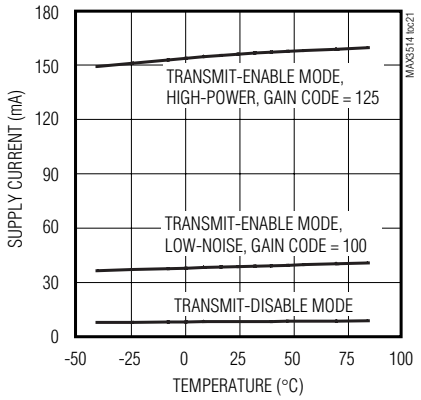

SUPPLY CURRENT vs. GAIN CODE

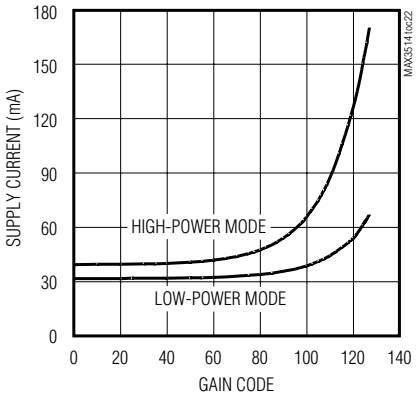

VOLTAGE GAIN vs. SUPPLY VOLTAGE HIGH-POWER MODE

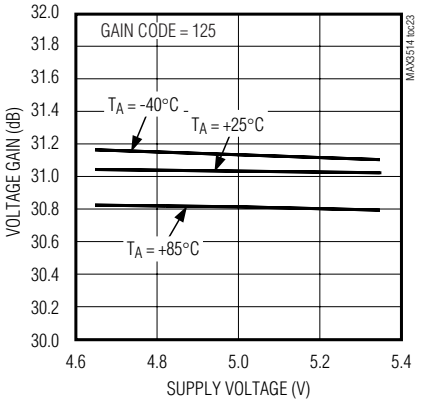

VOLTAGE GAIN vs. SUPPLY VOLTAGE LOW-NOISE MODE

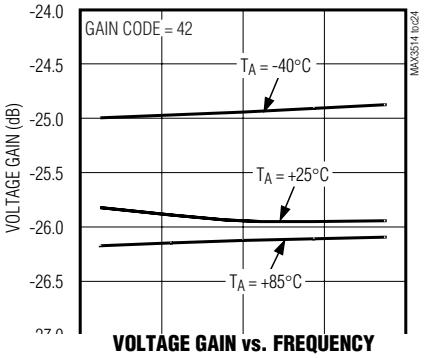

VOLTAGE GAIN vs. TEMPERATURE HIGH-POWER MODE

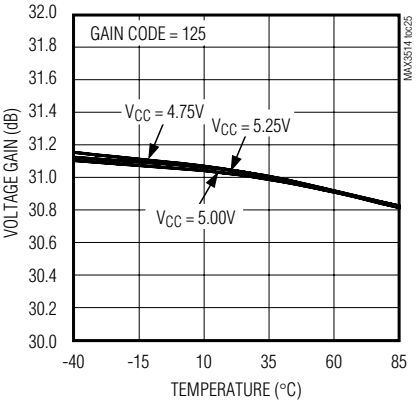

VOLTAGE GAIN vs. TEMPERATURE LOW-NOISE MODE

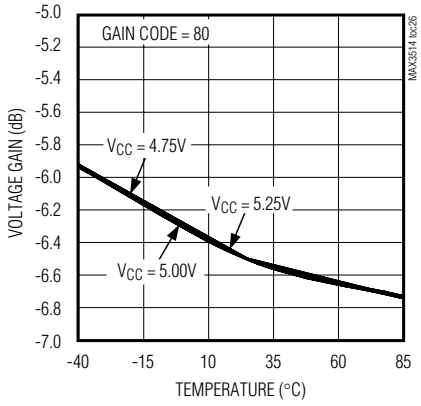

VOLTAGE GAIN vs. FREQUENCY HIGH-POWER MODE

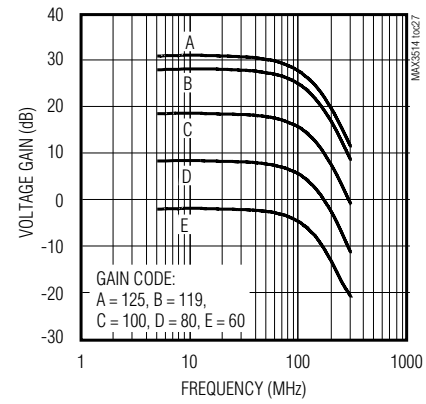

VOLTAGE GAIN vs. FREQUENCY LOW-NOISE MODE

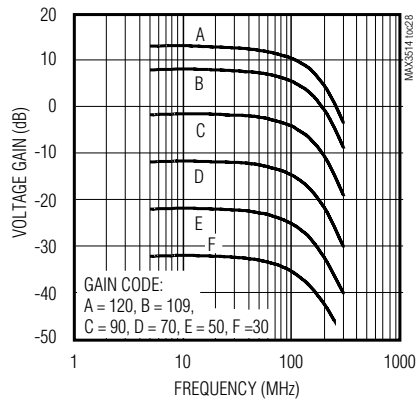

VOLTAGE GAIN vs. GAIN MODE

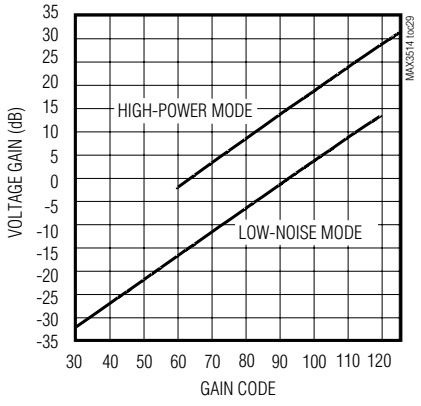

Typical Operating Characteristics (continued)

(Typical operating circuit; V_{CC} = +5V, V_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, f_{IN} = 20MHz, Z_{LOAD} = 75Ω, T_A = +25°C, unless otherwise noted.)

MAX3516 (continued)

GAIN STEP vs. GAIN MODE HIGH-POWER MODE

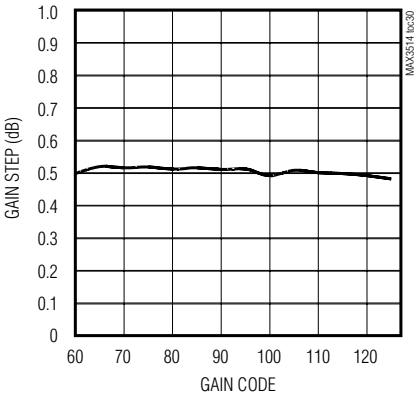

GAIN STEP vs. GAIN CODE LOW-NOISE MODE

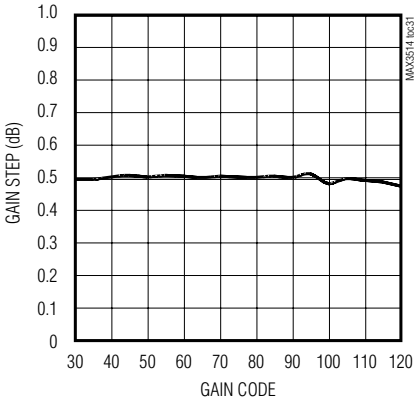

TRANSMIT NOISE vs. GAIN CODE

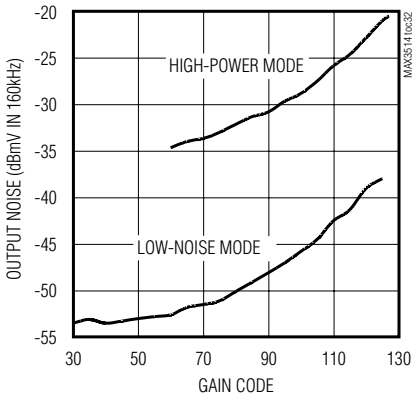

2ND HARMONIC DISTORTION vs. INPUT FREQUENCY, V_{CC} = 5.0V

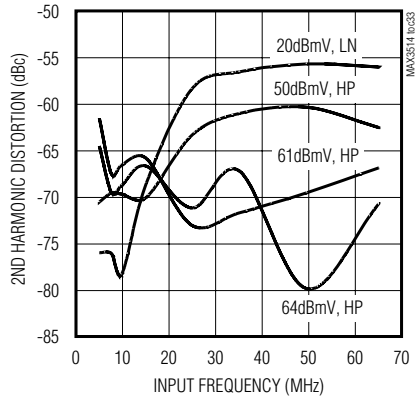

3RD HARMONIC DISTORTION vs. INPUT FREQUENCY, V_{CC} = 5.0V

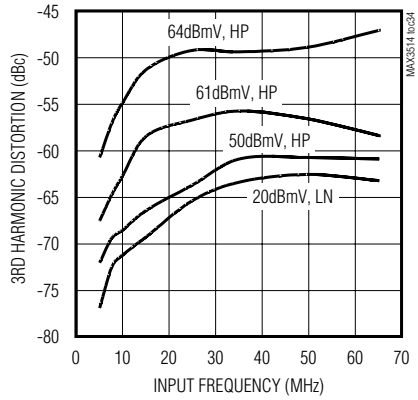

2ND HARMONIC DISTORTION vs. INPUT FREQUENCY, V_{CC} = 7.0V

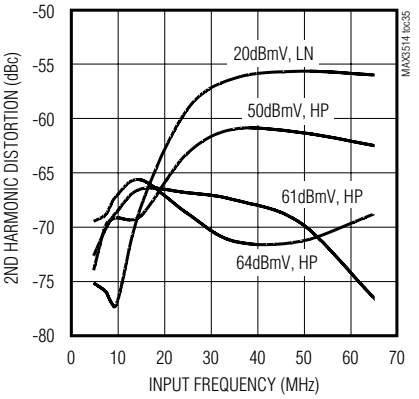

3RD HARMONIC DISTORTION vs. INPUT FREQUENCY, V_{CC} = 7.0V

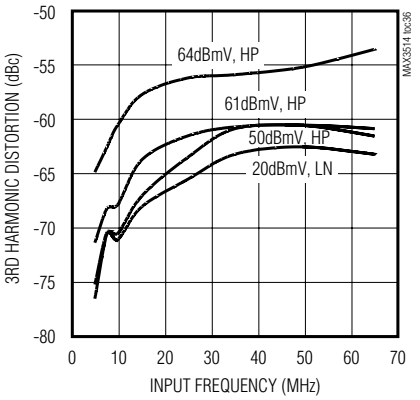

POWER-UP/DOWN TRANSIENTS vs. GAIN CODE

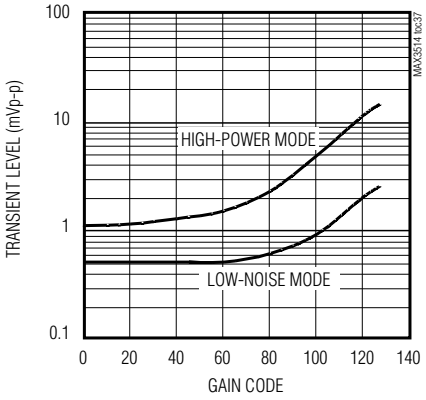

OUTPUT RETURN LOSS vs. FREQUENCY (75Ω SYSTEM)

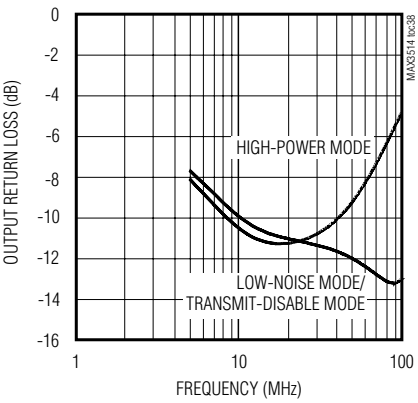

Typical Operating Characteristics (continued)

(Typical operating circuit; V_{CC} = +5V, V_{IN} = +34dBmV, TXEN = $\overline{SHDN}$ = high, f_{IN} = 20MHz, Z_{LOAD} = 75Ω, T_A = +25°C, unless otherwise noted.)

MAX3516 (continued)

OUTPUT IMPEDANCE, 5MHz–65MHz (75Ω SYSTEM)



OUTPUT SPECTRUM

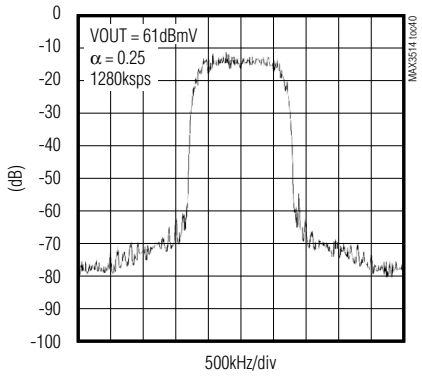

OUTPUT SPECTRUM

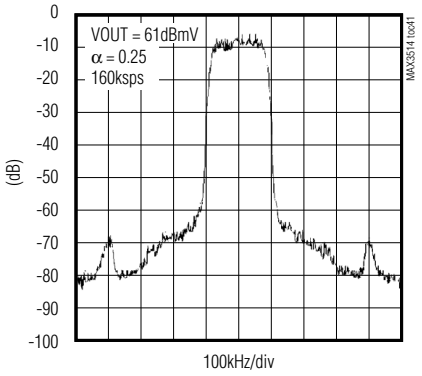

OUTPUT SPECTRUM

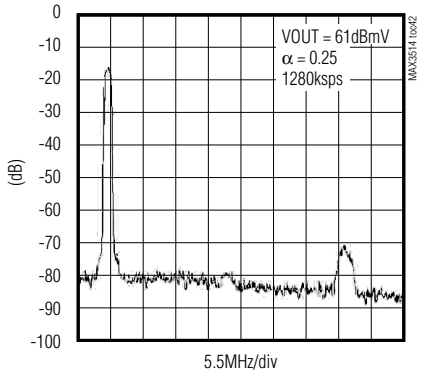

Pin Description

PIN	NAME	FUNCTION
1, 3, 7, 11	GND	Ground
2	V_{CC}	Programmable-Gain Amplifier (PGA) +5V Supply. Bypass to pin 4 with a decoupling capacitor as close to the part as possible.
4	GND	PGA RF Ground. As with all ground connections, maintain the shortest possible (low-inductance) length to the ground plane.
5	IN+	Positive PGA Input. Along with IN-, this port forms a high-impedance differential input to the PGA. Driving this port differentially increases the rejection of second-order distortion at low output levels.
6	IN-	Negative PGA Input. When not used, this port must be AC-coupled to ground. See IN+.
8	$\overline{CS}$	Serial-Interface Enable. TTL-compatible input. See *Serial Interface* section.
9	SDA	Serial-Interface Data. TTL-compatible input. See *Serial Interface* section.
10	SCLK	Serial-Interface Clock. TTL-compatible input. See *Serial Interface* section.
12	$\overline{SHDN}$	Shutdown. When $\overline{SHDN}$ is set low, all functions (including the serial interface) are disabled.
13, 17	N.C.	No Connection
14	CEXT	RF Output Bypass. Bypass to ground with a 0.1µF capacitor. (N.C. for MAX3517.)
15	OUT-	Negative Output. Along with OUT+, this port forms a 300Ω impedance output. This port is matched to a 75Ω load using a 2:1 (voltage ratio) transformer.
16	OUT+	Positive Output. See OUT-.
18	TXEN	Transmit Enable. Drive TXEN high to place the device in transmit-enable mode.
19	V_{CC}	Output Amplifier Bias, +5V Supply. Bypass to pin 20 with a decoupling capacitor as close to the part as possible.
20	GND	Output Amplifier Bias Ground. As with all ground connections, maintain the shortest possible (low-inductance) length to the ground plane.
Exposed Paddle	GND	Ground (MAX3516 only)

Functional Diagram

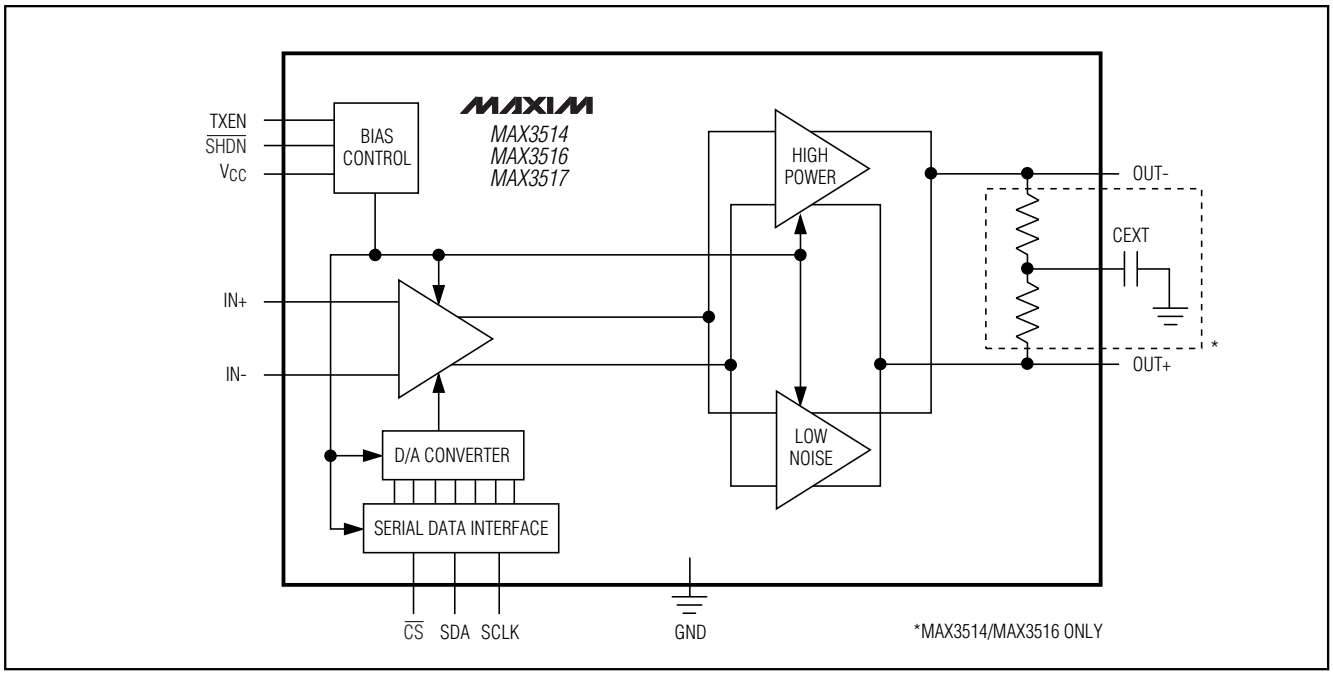

Detailed Description

Programmable-Gain Amplifier

The PGA consists of the variable-gain amplifier (VGA) and the digital-to-analog converter (DAC), which provide better than 56dB of output level control in 0.5dB steps. The PGA is implemented as a programmable Gilbert-cell attenuator. The gain of the PGA is determined by a 7-bit word (D6–D0) programmed through the serial data interface (Tables 1 and 2).

Specified performance is achieved when the input is driven differentially. The device may be driven single ended. To drive the device in this manner, one of the input pins must be capacitively coupled to ground. Use a capacitor value large enough to allow for a low-impedance path to ground at the lowest frequency of operation. For operation down to 5MHz, a 0.001µF capacitor is suggested.

Output Amplifiers

The output amplifiers are Class A differential amplifiers capable of driving +61dBmV (QPSK, MAX3514) differentially. This architecture provides superior even-order distortion performance but requires that a transformer be used to convert to a single-ended output. In transmit-disable mode, the output amplifiers are powered down. A resistor is across the output so that the output impedance remains matched when the amplifier is in transmit-disable mode. Disabling the output devices also results in low output noise.

MAX3514/MAX3516

To match the output impedance to a 75Ω load, the transformer must have a turns ratio (voltage ratio) of 2:1 (4:1 impedance ratio). The differential amplifier is biased directly from the +5V supply using the center tap of the output transformer. This provides a significant benefit when switching between transmit mode and transmit-disable mode. Stored energy due to bias currents will cancel within the transformer and prevent switching transients from reaching the load.

MAX3517

The MAX3517 uses external matching resistors to allow matching to various load impedances through suitable values of matching resistors and transformer turns ratios.

Serial Interface

The serial interface has an active-low enable ($\overline{CS}$) to bracket the data, with data clocked in MSB first on the rising edge of SCLK. Data is stored in the storage latch on the rising edge of $\overline{CS}$. The serial interface controls

the state of the PGA and the output amplifiers. Tables 1 and 2 show the register format. Serial-interface timing is shown in Figure 1.

Applications Information

High-Power and Low-Noise Modes

The MAX3514/MAX3516/MAX3517 have two transmit modes, high power (HP) and low noise (LN). Each of these modes is actuated by the high-order bit D7 of the 8-bit programming word. When D7 is a logic 1, HP mode is enabled. When D7 is a logic 0, LN mode is enabled.

Each of these modes is characterized by the activation of a distinct output stage. In HP mode, the output stage exhibits 15dB higher gain than LN mode. The lower gain of the LN output stage allows for significantly lower output noise and lower transmit/transmit-disable transients.

The full range of gain codes (D6–D0) may be used in either mode. For DOCSIS applications, HP mode is recommended for output levels at or above +42dBmV (MAX3514, D7 = 1, gain code = 87), LN mode when the output level is below +42dBmV (MAX3514, D7 = 0, gain code = 115).

Shutdown Mode

In normal operation, the shutdown pin ($\overline{SHDN}$) is held high. When $\overline{SHDN}$ is taken low, all circuits within the IC are disabled. Only leakage currents flow in this state. Data stored within the serial-data interface latches will

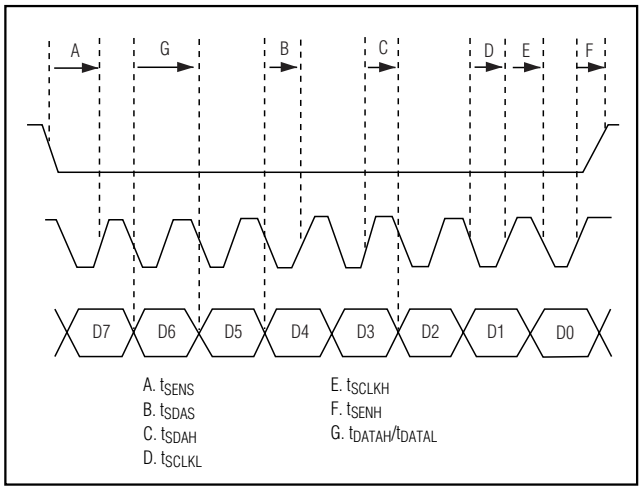

Figure 1. Serial-Interface Timing Diagram

Table 1. Serial-Interface Control Word

BIT	MNEMONIC	DESCRIPTION
MSB 7	D7	High-power/low-noise mode select
6	D6	Gain code, bit 6
5	D5	Gain code, bit 5
4	D4	Gain code, bit 4
3	D3	Gain code, bit 3
2	D2	Gain code, bit 2
1	D1	Gain code, bit 1
LSB 0	D0	Gain code, bit 0

Table 2. Chip State Control Bits

$\overline{SHDN}$	TXEN	D7	D6	D5	D4	D3	D2	D1	D0	GAIN CODE (DECIMAL)	GAIN* (DB)	STATES
0	X	X	X	X	X	X	X	X	X			Shutdown Mode
1	0	X	X	X	X	X	X	X	X			Transmit-Disable Mode
1	1	1	X	X	X	X	X	X	X			Transmit-Enable Mode, High Power
1	1	0	X	X	X	X	X	X	X			Transmit- Enable Mode, Low Noise
1	1	0	0	1	1	0	0	0	0	48	-26	
1	1	0	1	0	1	0	0	0	0	80	-10	
1	1	0	1	1	1	0	0	1	1	115	8	
1	1	1	1	0	1	0	1	1	1	87	9	
1	1	1	1	1	0	1	1	1	0	110	20	
1	1	1	1	1	1	1	1	0	1	125	28	

**Typical Gain at +25°C, V_{CC} = 5.0V*

be lost upon entering this mode. Current consumption is reduced to 10µA (typ) in shutdown mode.

Output Match

MAX3514/MAX3516

When used in conjunction with a 2:1 voltage-ratio transformer, the MAX3514/MAX3516 are internally resistively matched to 75Ω. This internal resistor is across the OUT+ and OUT- terminals.

To improve the match at the high end of the frequency range (65MHz), a reactive match may be employed as part of the ensuing diplex filter. A series inductor (typ 180nH) followed by a shunt capacitor (typ 33µF) can be placed directly after the output transformer. This match will also improve the gain flatness substantially.

As mentioned above, the matching components may be incorporated into the diplex filter design. Optimize the input impedance of the diplex filter to be 35 + j35 (typ) at 65MHz when using the specified output transformer.

MAX3517

The MAX3517 does not have an internal matching resistor. This allows the device performance to be optimized for various load impedances.

When 300Ω resistors are placed across the output terminals of the device, performance identical to the MAX3514 will result. If an impedance higher than 300Ω is used, additional gain will result.

Note also that a 2:1 voltage-ratio output transformer is not needed.

When operating the device with arbitrary output resistance and XFMR turns ratio, take care not to exceed the allowable power dissipation (see *Absolute Maximum Ratings*).

Transformer

To match the output of the MAX3514/MAX3516 to a 75Ω load, a 2:1 voltage-ratio transformer is required. This transformer must have adequate bandwidth to cover the intended application. Note that most RF transformers specify bandwidth with a 50Ω source on the primary and a matching resistance on the secondary winding. Operating in a 75Ω system will tend to shift the low-frequency edge of the transformer bandwidth specification up by a factor of 1.5 due to primary inductance. Keep this in mind when specifying a transformer.

Bias to the output stage is provided through the center tap on the transformer primary. This greatly diminishes the on/off transients present at the output when switching between transmit and transmit-disable modes. Commercially available transformers typically have adequate balance between half-windings to achieve substantial transient cancellation.

Finally, keep in mind that transformer core inductance varies proportionally with temperature. If the application requires low temperature extremes (less than 0°C), adequate primary inductance must be present to sustain low-frequency output capability as temperatures drop. In general, this will not be a problem as modern RF transformers have adequate bandwidth.

Input Circuit

To achieve rated performance, the inputs of the MAX3514/MAX3516/MAX3517 must be driven differentially with an appropriate input level. The differential input impedance is approximately 1.5kΩ. Most applications will require a differential low-pass filter preceding the device. The filter design will dictate a terminating impedance of a specified value. Place this load impedance across the AC-coupled input pins (see *Typical Operating Circuit*).

The MAX3514/MAX3517 have sufficient gain to produce an output level of +61dBmV (QPSK through a 2:1 transformer) when driven with a +34dBmV input signal. The MAX3516 provides an additional 3dB of gain and output level. When a lower input level is present, the maximum output level will be reduced proportionally and output linearity will increase. If an input level greater than +34dBmV is used, the 3rd-order distortion performance will degrade slightly.

If single-ended sources drive the MAX3514/MAX3516/MAX3517, one of the input terminals must be capacitively coupled to ground (IN+ or IN-). The value of this capacitor must be large enough to look like a short circuit at the lowest frequency of interest. For operation at 5MHz with a 75Ω source impedance, a value of 0.001µF will suffice.

Layout Issues

A well-designed PC board is an essential part of an RF circuit. For best performance, pay attention to power-supply layout issues, as well the output circuit layout.

Output Circuit Layout

The differential implementation of the MAX3514/MAX3516/MAX3517s' output has the benefit of significantly reducing even-order distortion, the most significant of which is 2nd-harmonic distortion. The degree of distortion cancellation depends on the amplitude and phase balance of the overall circuit. It is important to keep the trace lengths from the output pins equal.

Power-Supply Layout

For minimal coupling between different sections of the IC, the ideal power-supply layout is a star configuration. This configuration has a large-value decoupling capacitor at the central power-supply node. The power-supply traces branch out from this node, each going to a separate power-supply node in the circuit. At the end of each of these traces is a decoupling capacitor that provides a very low impedance at the frequency of interest. This arrangement provides local power-supply decoupling at each power-supply pin.

The power-supply traces must be made as thick as practical.

Ground inductance degrades distortion performance. Therefore, ground plane connections to pin 4 and pin 20 should be made with multiple vias if necessary.

Exposed Paddle Thermal Considerations

The exposed paddle (EP) of the MAX3516's 20-pin TSSOP-EP package provides a low thermal-resistance path to the die. It is important that the PC board on which the MAX3516 is mounted, be designed to conduct heat from this contact. In addition, the EP should be provided with a low inductance path to electrical ground.

It is recommended that the EP be soldered to a ground plane on the PC board, either directly or through an array of plated via holes.

Typical Operating Circuit

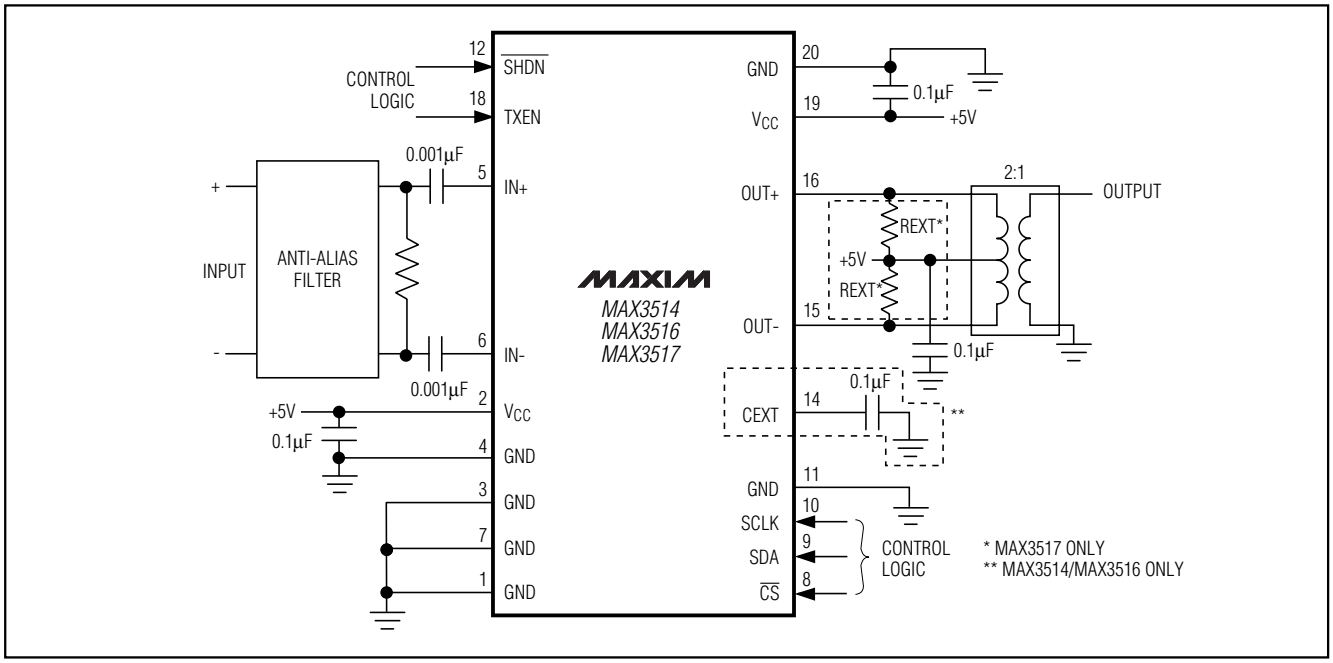

Chip Information

TRANSISTOR COUNT: 1006

Upstream CATV Amplifiers

Package Information

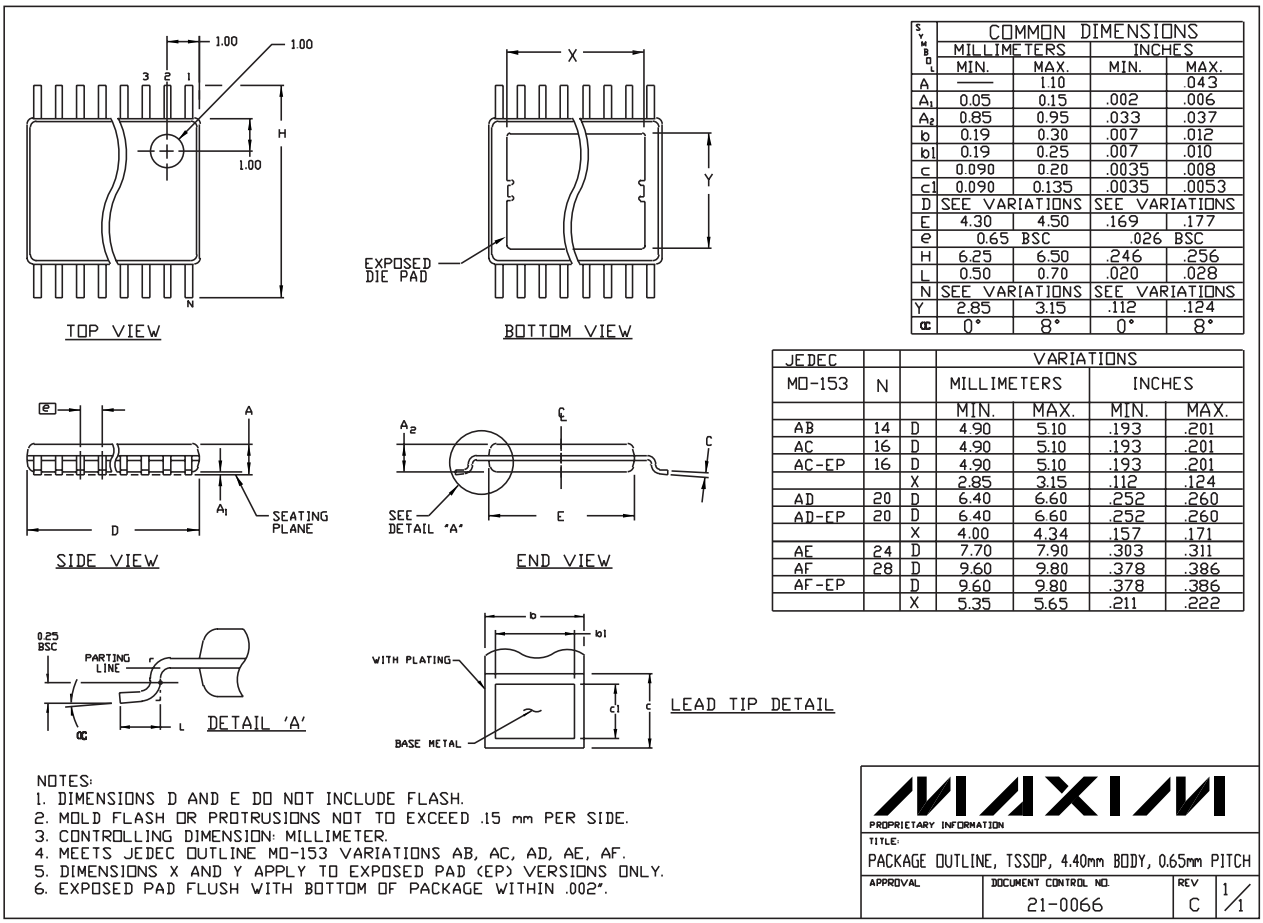

TSSOP.EPS

SYMBOL	COMMON DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	———	1.10		.043
A_1	0.05	0.15	.002	.006
A_2	0.85	0.95	.033	.037
b	0.19	0.30	.007	.012
b1	0.19	0.25	.007	.010
c	0.090	0.20	.0035	.008
c1	0.090	0.135	.0035	.0053
D	SEE VARIATIONS		SEE VARIATIONS	
E	4.30	4.50	.169	.177
e	0.65 BSC		.026 BSC	
H	6.25	6.50	.246	.256
L	0.50	0.70	.020	.028
N	SEE VARIATIONS		SEE VARIATIONS	
Y	2.85	3.15	.112	.124
α	0°	8°	0°	8°

JEDEC			VARIATIONS			
MO-153	N		MILLIMETERS		INCHES	
			MIN.	MAX.	MIN.	MAX.
AB	14	D	4.90	5.10	.193	.201
AC	16	D	4.90	5.10	.193	.201
AC-EP	16	D	4.90	5.10	.193	.201
		X	2.85	3.15	.112	.124
AD	20	D	6.40	6.60	.252	.260
AD-EP	20	D	6.40	6.60	.252	.260
		X	4.00	4.34	.157	.171
AE	24	D	7.70	7.90	.303	.311
AF	28	D	9.60	9.80	.378	.386
AF-EP		D	9.60	9.80	.378	.386
		X	5.35	5.65	.211	.222

NOTES:
1. DIMENSIONS D AND E DO NOT INCLUDE FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15 mm PER SIDE.
3. CONTROLLING DIMENSION: MILLIMETER.
4. MEETS JEDEC OUTLINE MO-153 VARIATIONS AB, AC, AD, AE, AF.
5. DIMENSIONS X AND Y APPLY TO EXPOSED PAD (EP) VERSIONS ONLY.
6. EXPOSED PAD FLUSH WITH BOTTOM OF PACKAGE WITHIN .002".

MAXIM
PROPRIETARY INFORMATION

TITLE:
PACKAGE OUTLINE, TSSOP, 4.40mm BODY, 0.65mm PITCH

APPROVAL	DOCUMENT CONTROL NO.	REV	
	21-0066	C	1/1

Package Information (continued)

QSOP.EPS

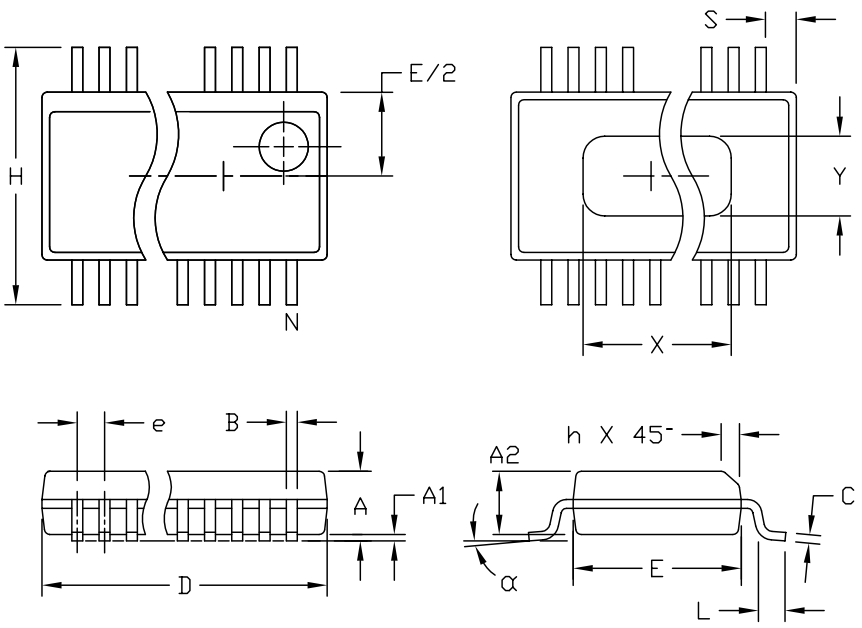

DIM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.061	.068	1.55	1.73
A1	.004	.0098	0.102	0.249
A2	.055	.061	1.40	1.55
B	.008	.012	0.20	0.31
C	.0075	.0098	0.191	0.249
D	SEE VARIATIONS			
E	.150	.157	3.81	3.99
e	.025 BSC		0.635 BSC	
H	.230	.244	5.84	6.20
h	.010	.016	0.25	0.41
L	.016	.035	0.41	0.89
N	SEE VARIATIONS			
X	SEE VARIATIONS			
Y	.071	.087	1.803	2.209
α	0°	8°	0°	8°

VARIATIONS:

	INCHES MIN.	INCHES MAX.	MILLIMETERS MIN.	MILLIMETERS MAX.	N	
D	.189	.196	4.80	4.98	16	AA
S	.0020	.0070	0.05	0.18		
X	.107	.123	2.72	3.12		
D	.337	.344	8.56	8.74	20	AB
S	.0500	.0550	1.270	1.397		
D	.337	.344	8.56	8.74	24	AC
S	.0250	.0300	0.635	0.762		
D	.386	.393	9.80	9.98	28	AD
S	.0250	.0300	0.635	0.762		
X	.271	.287	6.88	7.29		

NOTES:
1. D & E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .006" PER SIDE.
3. HEAT SLUG DIMENSIONS X AND Y APPLY ONLY TO 16 AND 28 LEAD POWER-QSOP PACKAGES.
4. CONTROLLING DIMENSIONS: INCHES.
5. MEETS JEDEC MO137.

MAXIM
PROPRIETARY INFORMATION

TITLE:
PACKAGE OUTLINE, QSOP, .150", .025" LEAD PITCH

APPROVAL	DOCUMENT CONTROL NO.	REV	
	21-0055	C	1/1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2001 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.