
VS-MBRB30..CTPbF, VS-MBR30..CT-1PbF Series


VS-MBRB30..CTPbF






D²PAK

VS-MBR30..CT-1PbF





TO-262

FEATURES

- 150 °C T_J operation
- Low forward voltage drop
- High frequency operation
- Center tap D²PAK and TO-262 packages
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Halogen-free according to IEC 61249-2-21 definition
- Compliant to RoHS directive 2002/95/EC
- AEC-Q101 qualified

Pb e3 RoHS COMPLIANT HALOGEN FREE

DESCRIPTION

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

PRODUCT SUMMARY	
$I_{F(AV)}$	2 x 15 A
V_R	35 V/45 V
I_{RM}	100 mA at 125 °C

MAJOR RATINGS AND CHARACTERISTICS			
SYMBOL	CHARACTERISTICS	VALUES	UNITS
$I_{F(AV)}$	Rectangular waveform (per device)	30	A
I_{FRM}	T_C = 123 °C (per leg)	30	
V_{RRM}		35/45	V
I_{FSM}	t_p = 5 µs sine	1020	A
V_F	20 Apk, T_J = 125 °C	0.6	V
T_J	Range	- 65 to 150	°C

VOLTAGE RATINGS				
PARAMETER	SYMBOL	VS-MBRB3035CTPbF VS-MBR3035CT-1PbF	VS-MBRB3045CTPbF VS-MBR3045CT-1PbF	UNITS
Maximum DC reverse voltage	V_R	35	45	V
Maximum working peak reverse voltage	V_{RWM}			

ABSOLUTE MAXIMUM RATINGS					
PARAMETER		SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum average forward current	per leg	$I_{F(AV)}$	T_C = 123 °C, rated V_R	15	A
	per device			30	
Peak repetitive forward current per leg		I_{FRM}	Rated V_R, square wave, 20 kHz, T_C = 123 °C	30	
Non-repetitive peak surge current		I_{FSM}	5 µs sine or 3 µs rect. pulse — Following any rated load condition and with rated V_{RRM} applied	1020	
			Surge applied at rated load conditions halfwave, single phase, 60 Hz	200	
Non-repetitive avalanche energy per leg		E_{AS}	T_J = 25 °C, I_{AS} = 2 A, L = 5 mH	10	mJ
Repetitive avalanche current per leg		I_{AR}	Current decaying linearly to zero in 1 µs Frequency limited by T_J maximum V_A = 1.5 x V_R typical	2	A

ELECTRICAL SPECIFICATIONS					
PARAMETER	**SYMBOL**	**TEST CONDITIONS**		**VALUES**	**UNITS**
Maximum forward voltage drop	V_{FM} (1)	30 A	T_J = 25 °C	0.76	V
		20 A	T_J = 125 °C	0.6	
		30 A		0.72	
Maximum instantaneous reverse current	I_{RM} (1)	T_J = 25 °C	Rated DC voltage	1	mA
		T_J = 125 °C		100	
Threshold voltage	$V_{F(TO)}$	T_J = T_J maximum		0.29	V
Forward slope resistance	r_t			13.6	mΩ
Maximum junction capacitance	C_T	V_R = 5 V_{DC} (test signal range 100 kHz to 1 MHz), 25 °C		800	pF
Typical series inductance	L_S	Measured from top of terminal to mounting plane		8.0	nH
Maximum voltage rate of change	dV/dt	Rated V_R		10 000	V/µs

Note

(1) Pulse width < 300 µs, duty cycle < 2 %

THERMAL - MECHANICAL SPECIFICATIONS				
PARAMETER	**SYMBOL**	**TEST CONDITIONS**	**VALUES**	**UNITS**
Maximum junction temperature range	T_J		- 65 to 150	°C
Maximum storage temperature range	T_{Stg}		- 65 to 175	
Maximum thermal resistance, junction to case per leg	R_{thJC}	DC operation	1.5	°C/W
Typical thermal resistance, case to heatsink	R_{thCS}	Mounting surface, smooth and greased	0.50	
Maximum thermal resistance, junction to ambient	R_{thJA}	DC operation	50	
Approximate weight			2	g
			0.07	oz.
Mounting torque minimum		Non-lubricated threads	6 (5)	kgf · cm (lbf · in)
Mounting torque maximum			12 (10)	
Marking device		Case style D^2PAK	MBRB3045CT	
		Case style TO-262	MBR3045CT-1	

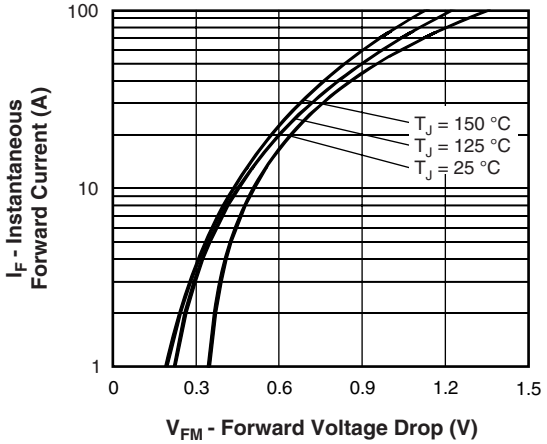


Fig. 1 - Maximum Forward Voltage Drop Characteristics (Per Leg)

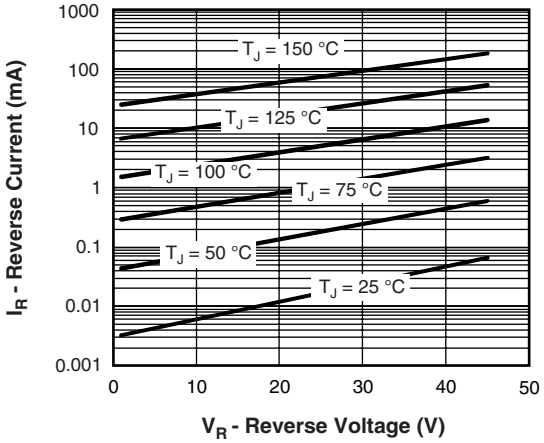


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage (Per Leg)

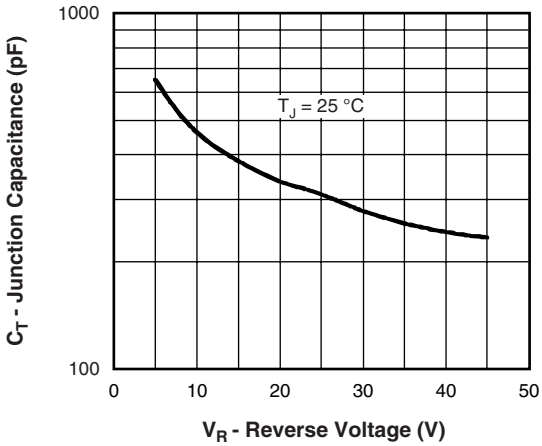


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage (Per Leg)

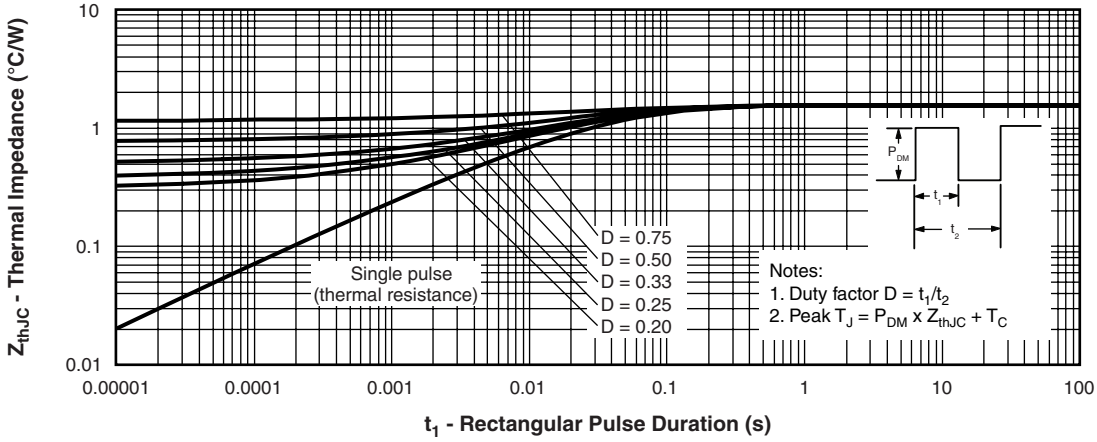


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics (Per Leg)

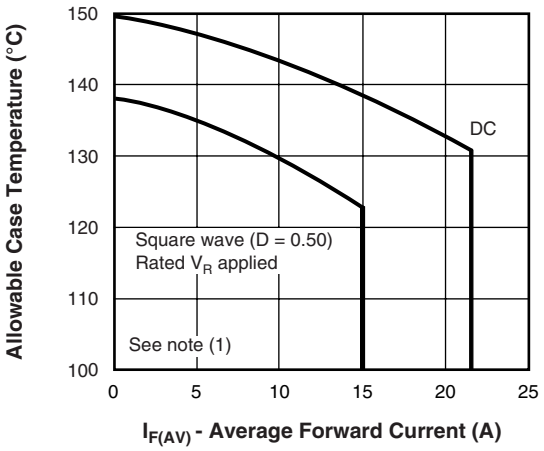


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current (Per Leg)

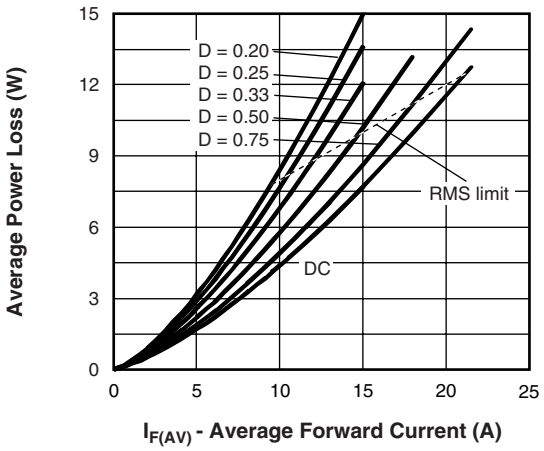


Fig. 6 - Forward Power Loss Characteristics (Per Leg)


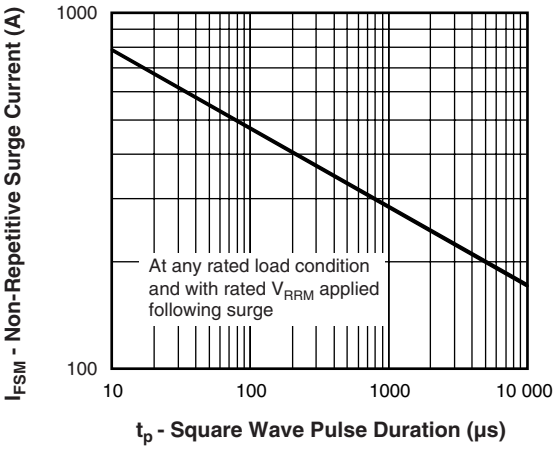


Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

Note

(1) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward power loss = $I_{F(AV)} \times V_{FM}$ at ($I_{F(AV)}$/D) (see fig. 6);
Pd_{REV} = Inverse power loss = $V_{R1} \times I_R$ (1 - D); I_R at V_{R1} = Rated V_R

Device code

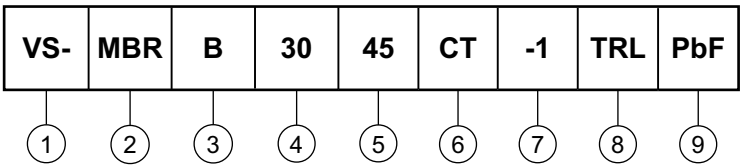

1 - HPP product suffix

2 - Essential part number

3 - • B = D^2PAK 7 None
• None = TO-262 7 = -1

4 - Current rating (30 = 30 A)

5 - Voltage ratings — 35 = 35 V, 45 = 45 V

6 - CT = Essential part number

7 - • None = D^2PAK 3 = B
• -1 = TO-262 3 None

8 - • None = Tube (50 pieces)
• TRL = Tape and reel (left oriented - for D^2PAK only)
• TRR = Tape and reel (right oriented - for D^2PAK only)

9 - • PbF = Lead (Pb)-free (for TO-262 and D^2PAK tube)
• P = Lead (Pb)-free (for D^2PAK TRR and TRL)

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95014
Part marking information	www.vishay.com/doc?95008
Packaging information	www.vishay.com/doc?95032