


Features

- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- Plastic Material: UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: D²PAK, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 1.7 grams (approx)
- Marking: Type Number

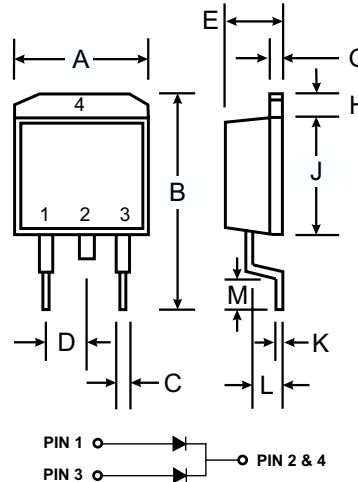

D ² PAK		
Dim	Min	Max
A	9.65	10.69
B	14.60	15.88
C	0.51	1.14
D	2.29	2.79
E	4.37	4.83
G	1.14	1.40
H	1.14	1.40
J	8.25	9.25
K	0.30	0.64
L	2.03	2.92
M	2.29	2.79
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	MBRB 2070CT	MBRB 2080CT	MBRB 2090CT	MBRB 20100CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	70	80	90	100	V
RMS Reverse Voltage	V _{R(RMS)}	49	56	63	70	V
Average Rectified Output Current (Note 1) @ T _C = 110°C	I _O	20				A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150				A
Forward Voltage Drop @ I _F = 10A, T _j = 125°C @ I _F = 10A, T _j = 25°C @ I _F = 20A, T _j = 125°C @ I _F = 20A, T _j = 25°C	V _{FM}	0.75 0.85 0.85 0.95				V
Peak Reverse Current @ T _A = 25°C at Rated DC Blocking Voltage @ T _A = 125°C	I _{RM}	0.1 100				mA
Typical Junction Capacitance (Note 2)	C _j	275				pF
Typical Thermal Resistance Junction to Case (Note 1)	R _{θJC}	2.0				°C/W
Voltage Rate of Change @ rated V _R	dV/dt	10000				V/μs
Operating Temperature Range	T _j	-65 to +150				°C
Storage Temperature Range	T _{STG}	-65 to +175				°C

Notes: 1. Thermal resistance junction to case mounted on heatsink.
 2. Measured at 1.0 MHz and Applied Reverse Voltage of 4.0V DC.

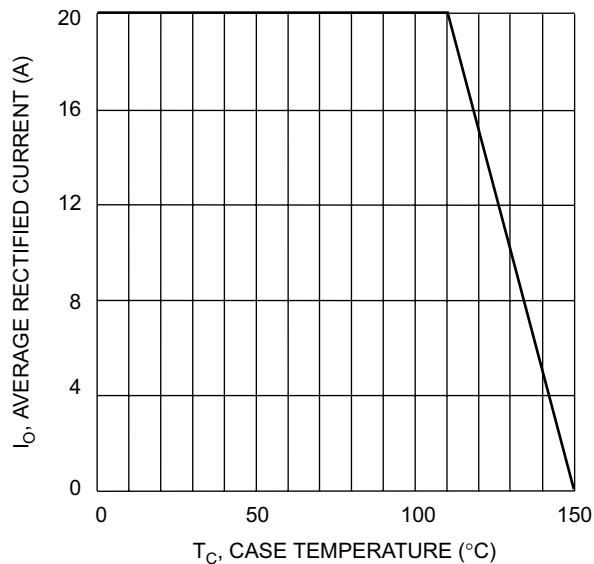


Fig. 1 Fwd Current Derating Curve

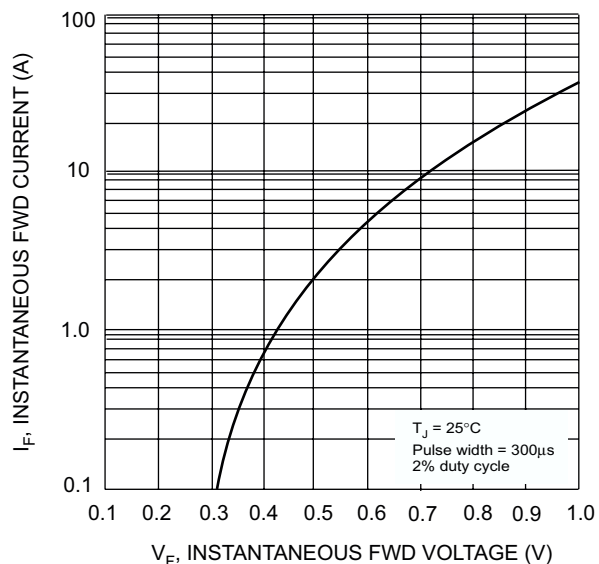


Fig. 2 Typical Forward Characteristics

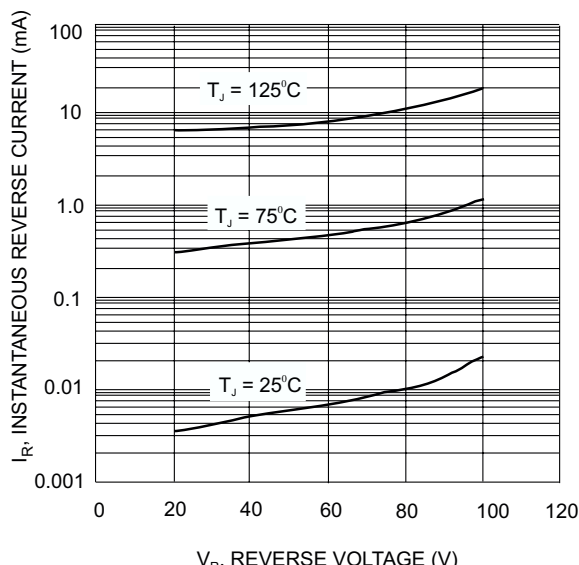


Fig. 3 Typical Reverse Characteristics

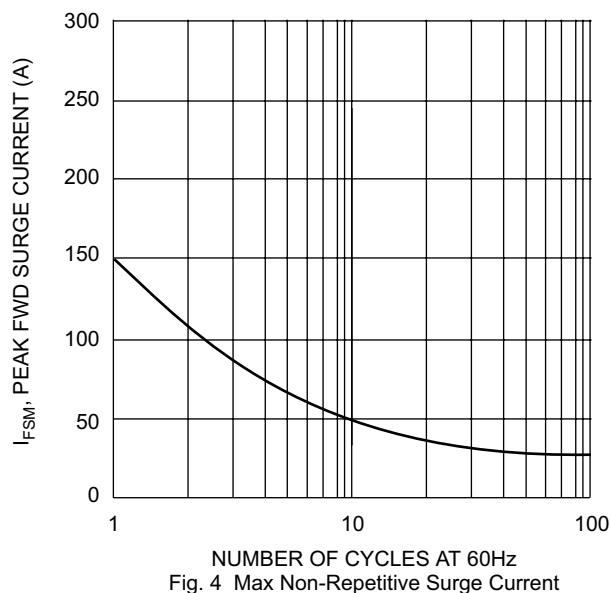


Fig. 4 Max Non-Repetitive Surge Current

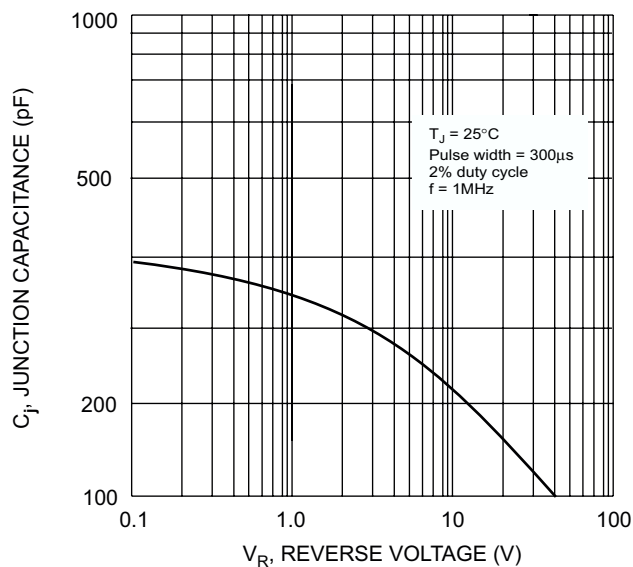


Fig. 5 Typical Junction Capacitance