



## Schottky Rectifier, 2 x 10 A

VS-MBRB20...CTGPbF

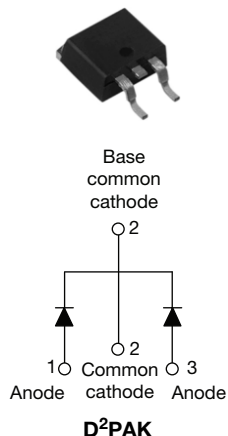

VS-MBR20...CTG-1PbF

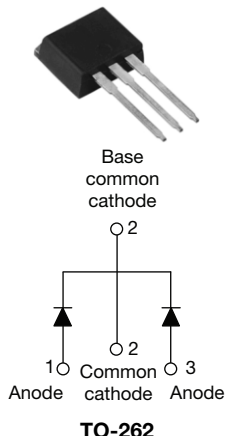

### FEATURES

- 150 °C T<sub>J</sub> operation
- Center tap D<sup>2</sup>PAK and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring enhanced ruggedness and long term reliability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Halogen-free according to IEC 61249-2-21 definition
- Compliant to RoHS directive 2002/95/EC
- AEC-Q101 qualified



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

### PRODUCT SUMMARY

|                    |               |
|--------------------|---------------|
| I <sub>F(AV)</sub> | 2 x 10 A      |
| V <sub>R</sub>     | 80 V to 100 V |

### DESCRIPTION

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

### MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL           | CHARACTERISTICS                   | VALUES      | UNITS |
|------------------|-----------------------------------|-------------|-------|
| I <sub>FRM</sub> | T <sub>C</sub> = 133 °C (per leg) | 20          | A     |
| V <sub>RRM</sub> |                                   | 80 to 100   | V     |
| I <sub>FSM</sub> | t <sub>p</sub> = 5 μs sine        | 850         | A     |
| V <sub>F</sub>   | 10 Apk, T <sub>J</sub> = 125 °C   | 0.70        | V     |
| T <sub>J</sub>   | Range                             | - 65 to 150 | °C    |

### VOLTAGE RATINGS

| PARAMETER                            | SYMBOL           | VS-MBRB2080CTGPbF<br>VS-MBR2080CTG-1PbF | VS-MBRB2090CTGPbF<br>VS-MBR2090CTG-1PbF | VS-MBRB20100CTGPbF<br>VS-MBR20100CTG-1PbF | UNITS |
|--------------------------------------|------------------|-----------------------------------------|-----------------------------------------|-------------------------------------------|-------|
| Maximum DC reverse voltage           | V <sub>R</sub>   | 80                                      | 90                                      | 100                                       | V     |
| Maximum working peak reverse voltage | V <sub>RWM</sub> |                                         |                                         |                                           |       |

# VS-MBRB20...CTGPbF, VS-MBR20...CTG-1PbF Series



Vishay High Power Products Schottky Rectifier, 2 x 10 A

| ABSOLUTE MAXIMUM RATINGS                                                    |             |                                                                                 |                                                                     |        |       |
|-----------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------|--------|-------|
| PARAMETER                                                                   | SYMBOL      | TEST CONDITIONS                                                                 |                                                                     | VALUES | UNITS |
| Maximum average forward current<br><div>per leg</div> <div>per device</div> | $I_{F(AV)}$ | $T_C = 133\text{ }^{\circ}\text{C}$ , rated $V_R$                               |                                                                     | 10     | A     |
|                                                                             |             |                                                                                 |                                                                     | 20     |       |
| Peak repetitive forward current per leg                                     | $I_{FRM}$   | Rated $V_R$ , square wave, 20 kHz<br>$T_C = 133\text{ }^{\circ}\text{C}$        |                                                                     | 20     |       |
| Non-repetitive peak surge current                                           | $I_{FSM}$   | 5 $\mu\text{s}$ sine or 3 $\mu\text{s}$ rect. pulse                             | Following any rated load condition and with rated $V_{RRM}$ applied | 850    |       |
|                                                                             |             | Surge applied at rated load conditions half wave, single phase, 60 Hz           |                                                                     | 150    |       |
| Peak repetitive reverse surge current                                       | $I_{RRM}$   | 2.0 $\mu\text{s}$ , 1.0 kHz                                                     |                                                                     | 0.5    |       |
| Non-repetitive avalanche energy per leg                                     | $E_{AS}$    | $T_J = 25\text{ }^{\circ}\text{C}$ , $I_{AS} = 2\text{ A}$ , $L = 12\text{ mH}$ |                                                                     | 24     | mJ    |

| ELECTRICAL SPECIFICATIONS             |                                |                                                                                |                                       |        |       |
|---------------------------------------|--------------------------------|--------------------------------------------------------------------------------|---------------------------------------|--------|-------|
| PARAMETER                             | SYMBOL                         | TEST CONDITIONS                                                                |                                       | VALUES | UNITS |
| Maximum forward voltage drop          | V <sub>FM</sub> <sup>(1)</sup> | 10 A                                                                           | T <sub>J</sub> = 25 °C                | 0.80   | V     |
|                                       |                                | 20 A                                                                           |                                       | 0.95   |       |
|                                       |                                | 10 A                                                                           | T <sub>J</sub> = 125 °C               | 0.70   |       |
|                                       |                                | 20 A                                                                           |                                       | 0.85   |       |
| Maximum instantaneous reverse current | I <sub>RM</sub> <sup>(1)</sup> | T <sub>J</sub> = 25 °C                                                         | V <sub>R</sub> = Rated V <sub>R</sub> | 0.10   | mA    |
|                                       |                                | T <sub>J</sub> = 125 °C                                                        |                                       | 6      |       |
| Threshold voltage                     | V <sub>F(TO)</sub>             | T <sub>J</sub> = T <sub>J</sub> maximum                                        |                                       | 0.433  | V     |
| Forward slope resistance              | r <sub>t</sub>                 |                                                                                |                                       | 15.8   | mΩ    |
| Maximum junction capacitance          | C <sub>T</sub>                 | V <sub>R</sub> = 5 V <sub>DC</sub> (test signal range 100 kHz to 1 MHz), 25 °C |                                       | 400    | pF    |
| Typical series inductance             | L <sub>S</sub>                 | Measured from top of terminal to mounting plane                                |                                       | 8.0    | nH    |
| Maximum voltage rate of change        | dV/dt                          | Rated V <sub>R</sub>                                                           |                                       | 10 000 | V/μs  |

## Note

<sup>(1)</sup> Pulse width < 300  $\mu\text{s}$ , duty cycle < 2 %

| THERMAL - MECHANICAL SPECIFICATIONS                  |                   |                               |               |                        |
|------------------------------------------------------|-------------------|-------------------------------|---------------|------------------------|
| PARAMETER                                            | SYMBOL            | TEST CONDITIONS               | VALUES        | UNITS                  |
| Maximum junction temperature range                   | T <sub>J</sub>    |                               | - 65 to 150   | °C                     |
| Maximum storage temperature range                    | T <sub>Stg</sub>  |                               | - 65 to 175   |                        |
| Maximum thermal resistance, junction to case per leg | R <sub>thJC</sub> | DC operation                  | 2.0           | °C/W                   |
| Maximum thermal resistance junction to ambient       | R <sub>thJA</sub> |                               | 50            |                        |
| Approximate weight                                   |                   |                               | 2             | g                      |
|                                                      |                   |                               | 0.07          | oz.                    |
| Mounting torque                                      | minimum           | Non-lubricated threads        | 6 (5)         | kgf · cm<br>(lbf · in) |
|                                                      | maximum           |                               | 12 (10)       |                        |
| Marking device                                       |                   | Case style D <sup>2</sup> PAK | MBRB2080CTG   |                        |
|                                                      |                   |                               | MBRB2090CTG   |                        |
|                                                      |                   |                               | MBRB20100CTG  |                        |
|                                                      |                   | Case style TO-262             | MBR2080CTG-1  |                        |
|                                                      |                   |                               | MBR2090CTG-1  |                        |
|                                                      |                   |                               | MBR20100CTG-1 |                        |



# VS-MBRB20...CTGPbF, VS-MBR20...CTG-1PbF Series

Schottky Rectifier, 2 x 10 A Vishay High Power Products

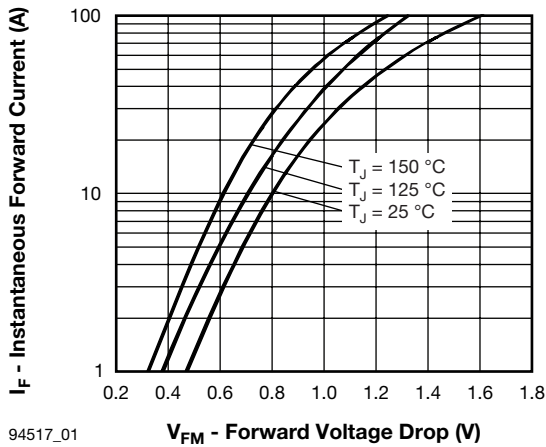


Fig. 1 - Maximum Forward Voltage Drop Characteristics (Per Leg)

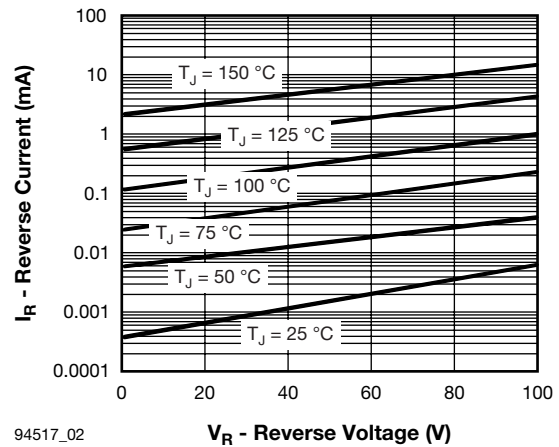


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage (Per Leg)

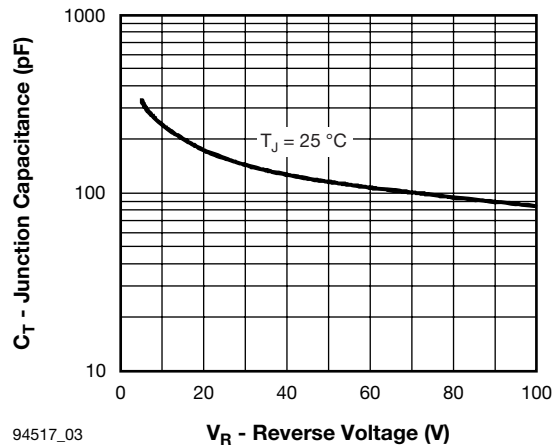


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage (Per Leg)

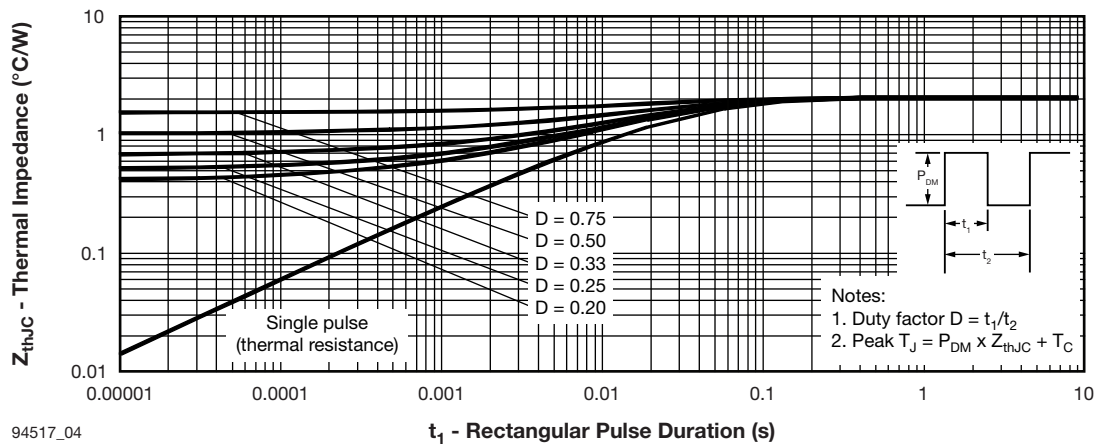


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

# VS-MBRB20...CTGPbF, VS-MBR20...CTG-1PbF Series

Vishay High Power Products Schottky Rectifier, 2 x 10 A

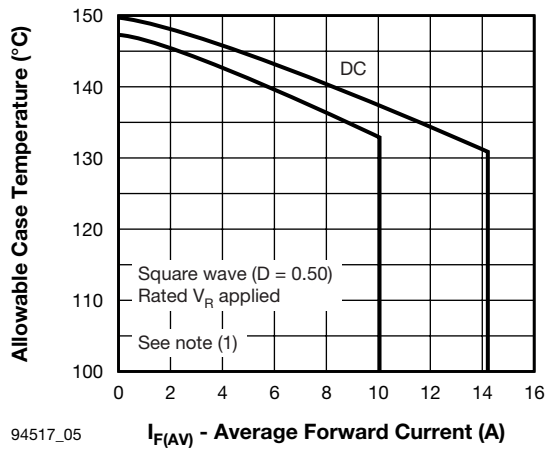


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current (Per Leg)

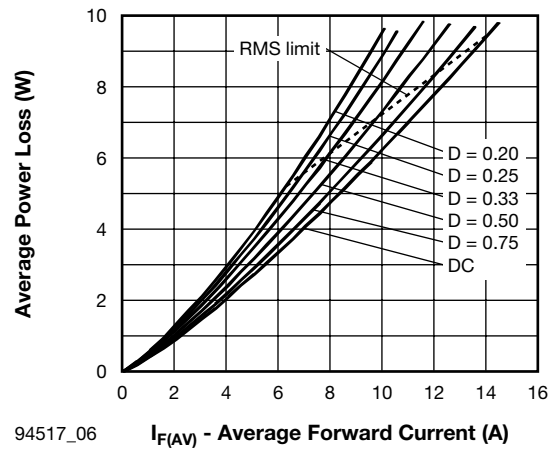


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

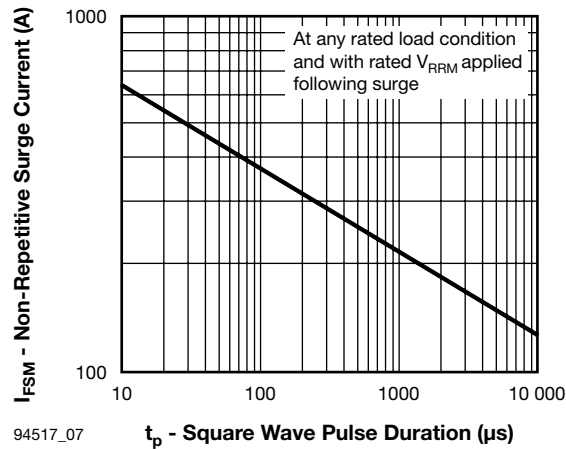


Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

## Note

- (1) Formula used:  $T_C = T_J - (P_d + P_{dREV}) \times R_{thJC}$ ;  
 $P_d$  = Forward power loss =  $I_{F(AV)} \times V_{FM}$  at ( $I_{F(AV)}/D$ ) (see fig. 6);  
 $P_{dREV}$  = Inverse power loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R$  at  $V_{R1}$  = Rated  $V_R$



# VS-MBRB20...CTGPbF, VS-MBR20...CTG-1PbF Series

Schottky Rectifier, 2 x 10 A Vishay High Power Products

## ORDERING INFORMATION TABLE

| Device code | VS- | MBR | B | 20 | 100 | CT | G | -1 | TL | PbF |
|-------------|-----|-----|---|----|-----|----|---|----|----|-----|
|             | 1   | 2   | 3 | 4  | 5   | 6  | 7 | 8  | 9  | 10  |


- |             |   |                                                                                                                                                                        |                                                                                                               |           |           |             |
|-------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|-----------|-------------|
| <b>1</b>    | - | HPP product suffix                                                                                                                                                     |                                                                                                               |           |           |             |
| <b>2</b>    | - | Essential part number                                                                                                                                                  |                                                                                                               |           |           |             |
| <b>3</b>    | - | • B = D <sup>2</sup> PAK<br>• None = TO-262                                                                                                                            |                                                                                                               |           |           |             |
| <b>4</b>    | - | Current rating (20 = 20 A)                                                                                                                                             | <table border="1"><tr><td>80 = 80 V</td></tr><tr><td>90 = 90 V</td></tr><tr><td>100 = 100 V</td></tr></table> | 80 = 80 V | 90 = 90 V | 100 = 100 V |
| 80 = 80 V   |   |                                                                                                                                                                        |                                                                                                               |           |           |             |
| 90 = 90 V   |   |                                                                                                                                                                        |                                                                                                               |           |           |             |
| 100 = 100 V |   |                                                                                                                                                                        |                                                                                                               |           |           |             |
| <b>5</b>    | - | Voltage ratings                                                                                                                                                        |                                                                                                               |           |           |             |
| <b>6</b>    | - | CT = Essential part number                                                                                                                                             |                                                                                                               |           |           |             |
| <b>7</b>    | - | G = Schottky generation                                                                                                                                                |                                                                                                               |           |           |             |
| <b>8</b>    | - | • None = D <sup>2</sup> PAK<br>• -1 = TO-262                                                                                                                           |                                                                                                               |           |           |             |
| <b>9</b>    | - | • None = Tube (50 pieces)<br>• TL = Tape and reel (left oriented - for D <sup>2</sup> PAK only)<br>• TR = Tape and reel (right oriented - for D <sup>2</sup> PAK only) |                                                                                                               |           |           |             |
| <b>10</b>   | - | • PbF = Lead (Pb)-free (for D <sup>2</sup> PAK tube)<br>• P = Lead (Pb)-free (for D <sup>2</sup> PAK TL/TR, and TO-262)                                                |                                                                                                               |           |           |             |

| LINKS TO RELATED DOCUMENTS |                                                                        |
|----------------------------|------------------------------------------------------------------------|
| Dimensions                 | <a href="http://www.vishay.com/doc?95014">www.vishay.com/doc?95014</a> |
| Part marking information   | <a href="http://www.vishay.com/doc?95008">www.vishay.com/doc?95008</a> |
| Packaging information      | <a href="http://www.vishay.com/doc?95032">www.vishay.com/doc?95032</a> |


## D<sup>2</sup>PAK, TO-262

### DIMENSIONS FOR D<sup>2</sup>PAK in millimeters and inches

Conforms to JEDEC outline D<sup>2</sup>PAK (SMD-220)

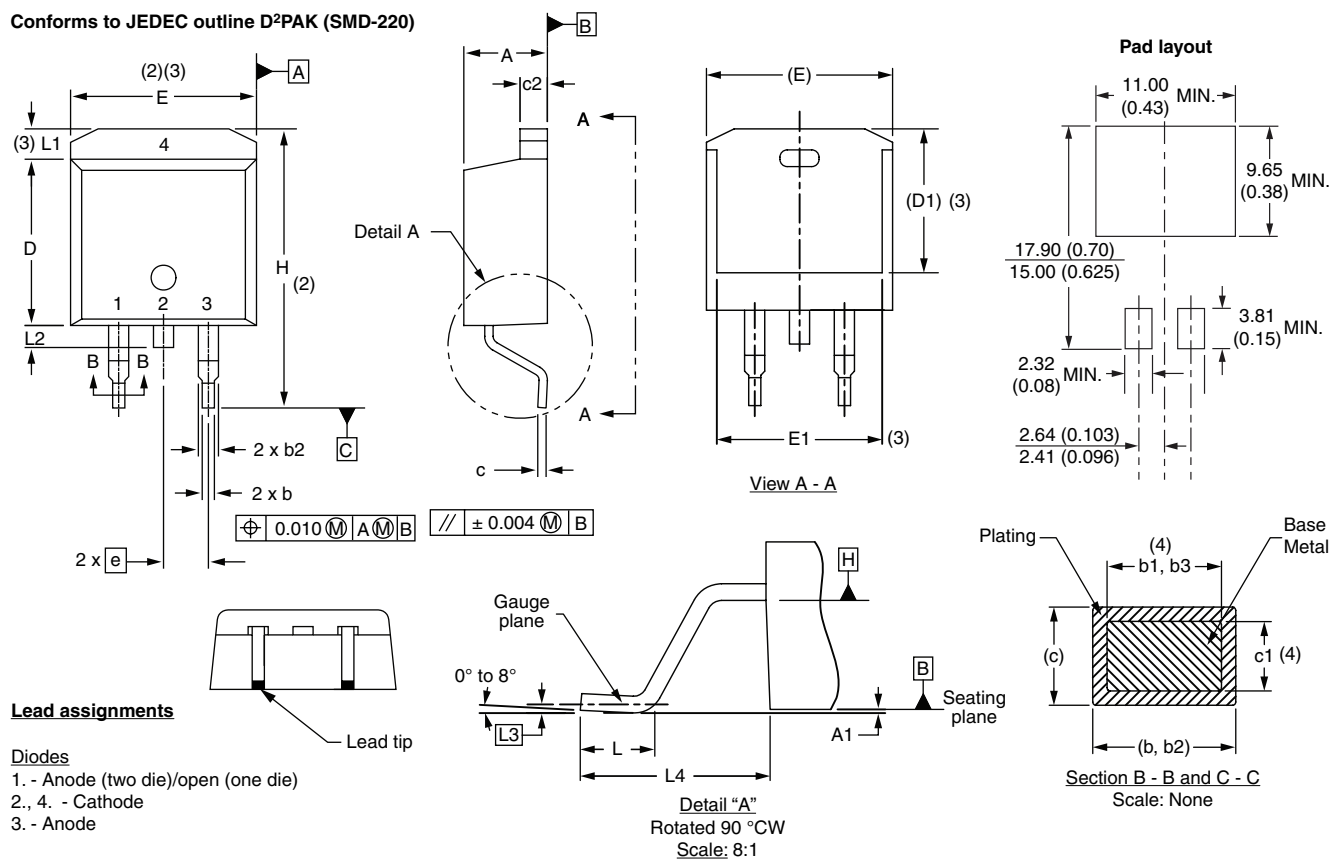

## DIMENSIONS FOR TO-262 in millimeters and inches

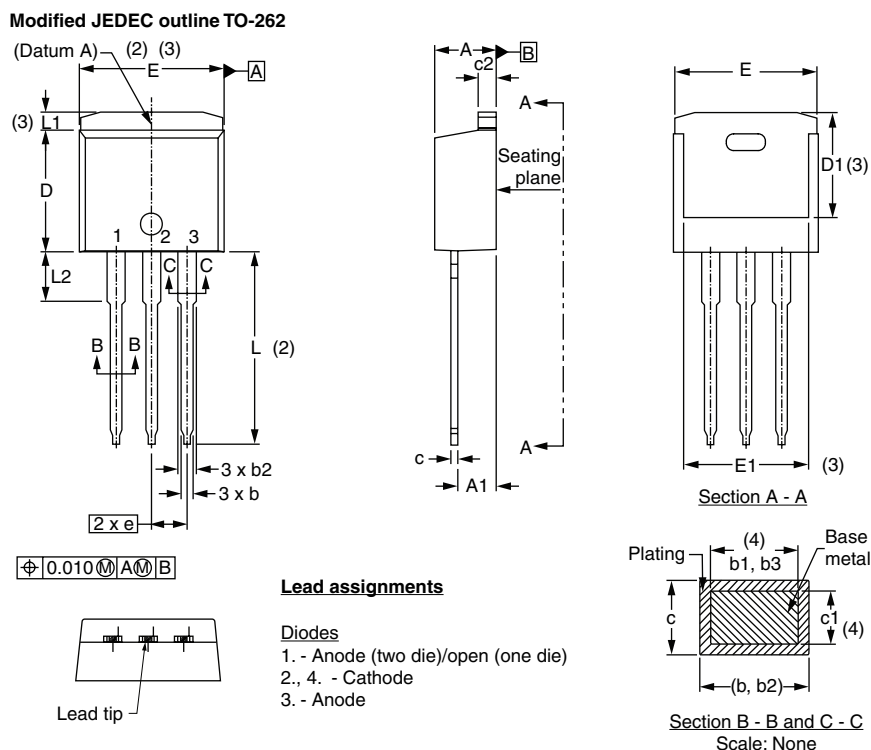

| SYMBOL | MILLIMETERS |       | INCHES    |       | NOTES |
|--------|-------------|-------|-----------|-------|-------|
|        | MIN.        | MAX.  | MIN.      | MAX.  |       |
| A      | 4.06        | 4.83  | 0.160     | 0.190 |       |
| A1     | 2.03        | 3.02  | 0.080     | 0.119 |       |
| b      | 0.51        | 0.99  | 0.020     | 0.039 |       |
| b1     | 0.51        | 0.89  | 0.020     | 0.035 | 4     |
| b2     | 1.14        | 1.78  | 0.045     | 0.070 |       |
| b3     | 1.14        | 1.73  | 0.045     | 0.068 | 4     |
| c      | 0.38        | 0.74  | 0.015     | 0.029 |       |
| c1     | 0.38        | 0.58  | 0.015     | 0.023 | 4     |
| c2     | 1.14        | 1.65  | 0.045     | 0.065 |       |
| D      | 8.51        | 9.65  | 0.335     | 0.380 | 2     |
| D1     | 6.86        | 8.00  | 0.270     | 0.315 | 3     |
| E      | 9.65        | 10.67 | 0.380     | 0.420 | 2, 3  |
| E1     | 7.90        | 8.80  | 0.311     | 0.346 | 3     |
| e      | 2.54 BSC    |       | 0.100 BSC |       |       |
| L      | 13.46       | 14.10 | 0.530     | 0.555 |       |
| L1     | -           | 1.65  | -         | 0.065 | 3     |
| L2     | 3.56        | 3.71  | 0.140     | 0.146 |       |

### Notes

- (1) Dimensioning and tolerancing as per ASME Y14.5M-1994
- (2) Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outmost extremes of the plastic body
- (3) Thermal pad contour optional within dimension E, L1, D1 and E1
- (4) Dimension b1 and c1 apply to base metal only
- (5) Controlling dimension: inches

- (6) Outline conform to JEDEC TO-262 except A1 (maximum), b (minimum) and D1 (minimum) where dimensions derived the actual package outline



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.