


67 MC 100-508

Pluggable terminal blocks on pin headers, pitch 5.08 mm

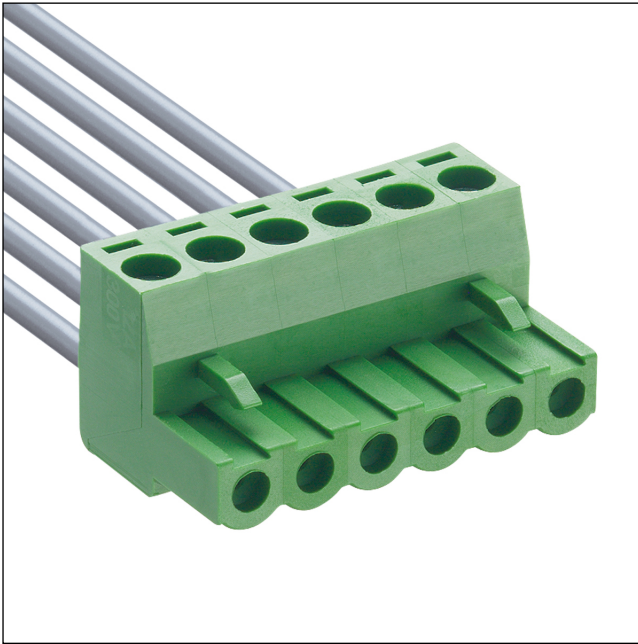


Pluggable screw terminal block, with lift clamp, without protection against misplacing, with locking, cable departure 180° to plugging direction, stringable without loss of pitch

Approvals:



67 MC 100-508

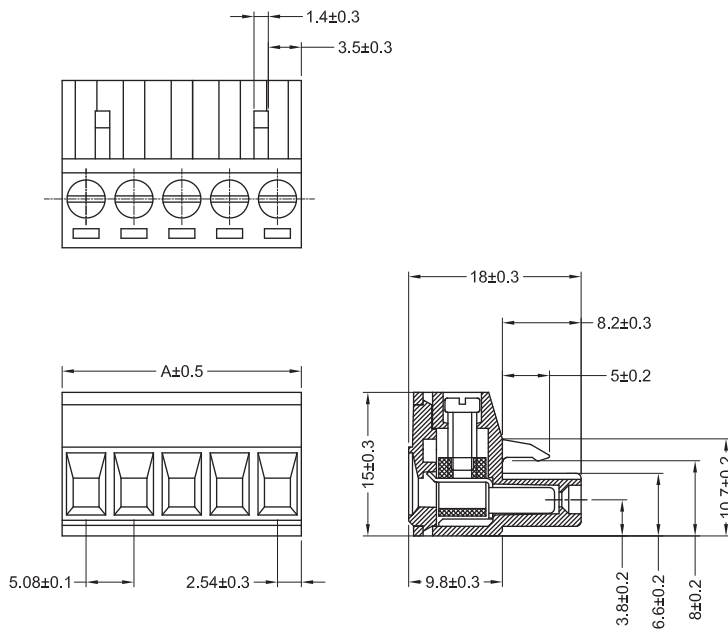

Environmental conditions

Temperature range -55 °C/+105 °C

Materials

Insulating body PA, V-0 according to UL94
Contact spring CuSn, tin-plated
Clamp CuZn, nickel-plated
Screw steel, zinc-plated

Mechanical data

Screw size M3
Tightening torque screw 0,5 Nm

Connectable conductors for screw clamp

Section AWG 24-14 (0,25-2,5 mm²)
Stripping length 4-5 mm

Electrical data (at T_{amb} 20 °C)

Rated current 16 A
Rated voltage 400 V AC
Rated impulse voltage ≥ 2 kV
Insulation resistance > 2 GΩ

Associated products

Counterparts
 ☞ ME 010-508 ☞ ME 020-508 ☞ ME 030-508
 ☞ ME 040-508

67 MC 100-508

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions A (mm)
MC 100-508 02	2	500	600	10.16
MC 100-508 03	3	350	600	15.24
MC 100-508 04	4	250	600	20.32
MC 100-508 05	5	200	600	25.40
MC 100-508 06	6	150	600	30.48
MC 100-508 08	8	100	600	40.64
MC 100-508 10	10	230	600	50.80
MC 100-508 12	12	185	600	60.96

Packaging:

in bulk, in a plastic bag