MC10198

Monostable Multivibrator

The MC10198 is a retriggerable monostable multivibrator. Two enable inputs permit triggering on any combination of positive or negative edges as shown in the accompanying table. The trigger input is buffered by Schmitt triggers making it insensitive to input rise and fall times.

The pulse width is controlled by an external capacitor and resistor. The resistor sets a current which is the linear discharge rate of the capacitor. Also, the pulse width can be controlled by an external current source or voltage (see applications information).

For high–speed response with minimum delay, a hi–speed input is also provided. This input bypasses the internal Schmitt triggers and the output responds within 2 nanoseconds typically.

Output logic and threshold levels are standard MECL 10,000. Test conditions are per Table 2. Each “Precondition” referred to in Table 2 is per the sequence of Table 1.


- P_D = 415 mW typ/pkg (No Load)
- t_{pd} = 4.0 ns typ Trigger Input to Q
- 2.0 ns typ Hi–Speed Input to Q
- Min Timing Pulse Width PW_{Qmin} 10 ns typ[1]
- Max Timing Pulse Width PW_{Qmax} >10 ms typ[2]
- Min Trigger Pulse Width PW_T 2.0 ns typ
- Min Hi–Speed Trigger Pulse Width PW_{HS} 3.0 ns typ
- Enable Setup Time t_{set} 1.0 ns typ
- Enable Hold Time t_{hold} 1.0 ns typ
- [1] C_{Ext} = 0 (Pin 4 open), R_{Ext} = 0 (Pin 6 to V_{EE})
- [2] C_{Ext} = 10 mF, R_{Ext} = 2.7 kW

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN


ON Semiconductor


http://onsemi.com

MARKING DIAGRAMS




CDIP–16
L SUFFIX
CASE 620






PDIP–16
P SUFFIX
CASE 648





PLCC–20
FN SUFFIX
CASE 775




A = Assembly Location
WL = Wafer Lot
YY = Year
WW = Work Week

ORDERING INFORMATION


Device	Package	Shipping
MC10198L	CDIP–16	25 Units / Rail
MC10198P	PDIP–16	25 Units / Rail
MC10198FN	PLCC–20	46 Units / Rail

© Semiconductor Components Industries, LLC, 2002

LOGIC DIAGRAM

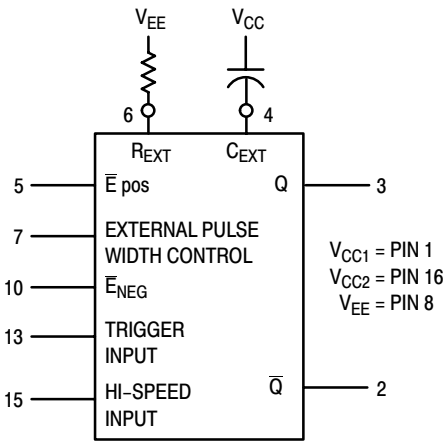

DIP PIN ASSIGNMENT

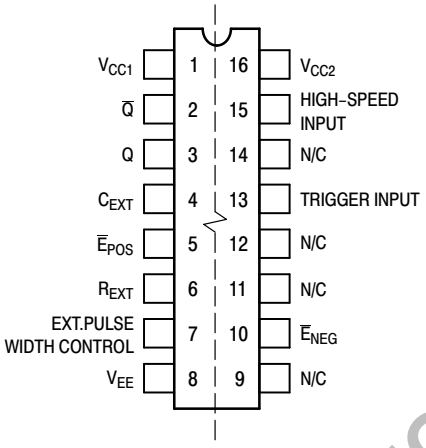


Pin assignment is for Dual–in–Line Package.
For PLCC pin assignment, see the Pin Conversion Tables on page 18 of the ON Semiconductor MECL Data Book (DL122/D).

TRUTH TABLE

INPUT		OUTPUT
$\overline{E}_{Pos}$	$\overline{E}_{Neg}$	
L	L	Triggers on both positive & negative input slopes
L	H	Triggers on positive input slope
H	L	Triggers on negative input slope
H	H	Trigger is disabled


TABLE 1 — PRECONDITION SEQUENCE

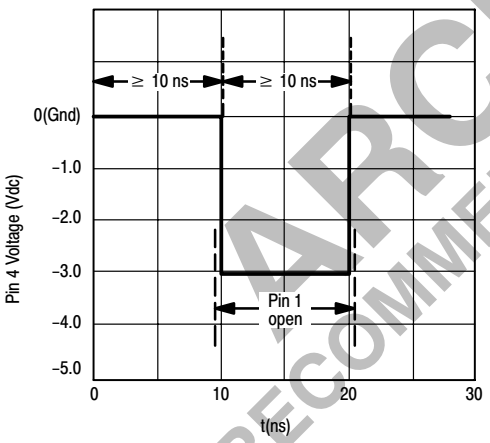

1. At t = 0 a.) Apply V_{IHmax} to Pin 5 and 10.
   b.) Apply V_{ILmin} to Pin 15.
   c.) Ground Pin 4.
2. At t ≥ 10 ns a.) Open Pin 1.
   b.) Apply –3.0 Vdc to Pin 4. Hold these conditions for ≥10 ns.
3. Return Pin 4 to Ground and perform test as indicated in Table 2.

TABLE 2 — CONDITIONS FOR TESTING OUTPUT LEVELS

(See Table 1 for Precondition Sequence)

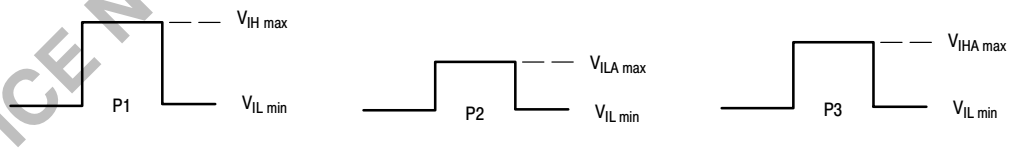

Pins 1, 16 = V_{CC} = Ground
Pins 6, 8 = V_{EE} = –5.2 Vdc
Outputs loaded 50 Ω to –2.0 Vdc

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN


Test	P.U.T.	Pin Conditions 5	10	13	15
Precondition					
V_{OH}	2			$V_{IL\ min}$	
V_{OH}	3			P1	
Precondition					
V_{OL}	3			$V_{IL\ min}$	
V_{OL}	2			P1	
Precondition					
V_{OHA}	2				$V_{ILA\ max}$
V_{OHA}	3				$V_{IHA\ min}$
Precondition					
V_{OHA}	2			$V_{IL\ min}$	
V_{OHA}	3			P3	
Precondition					
V_{OHA}	2			P2	
V_{OHA}	3			P3	
Precondition					
V_{OHA}	2		$V_{IH\ max}$	P2	
V_{OHA}	3		$V_{IH\ max}$	P3	
Precondition					
V_{OHA}	2		$V_{IH\ max}$	P1	
V_{OHA}	3		$V_{IH\ max}$	P1	

Test	P.U.T.	Pin Conditions 5	10	13	15
Precondition					
V_{OHA}	2		$V_{IHA\ min}$	P1	
V_{OHA}	3		$V_{ILA\ max}$	P1	
Precondition					
V_{OLA}	3				$V_{ILA\ max}$
V_{OLA}	2				$V_{IHA\ min}$
Precondition					
V_{OLA}	2			$V_{IL\ min}$	
V_{OLA}	3			$V_{IL\ min}$	
Precondition					
V_{OLA}	3			P2	
V_{OLA}	2			P3	
Precondition					
V_{OLA}	3		$V_{IH\ max}$	P2	
V_{OLA}	2		$V_{IH\ max}$	P3	
Precondition					
V_{OLA}	3	$V_{IHA\ min}$	$V_{IH\ max}$	P1	
V_{OLA}	2	$V_{ILA\ max}$	$V_{IH\ max}$	P1	
Precondition					
V_{OLA}	3	$V_{IH\ max}$	$V_{IHA\ min}$	P1	
V_{OLA}	2	$V_{IH\ max}$	$V_{ILA\ max}$	P1	

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	Test Limits							Unit
			–30°C		+25°C			+85°C		
			Min	Max	Min	Typ	Max	Min	Max	
Power Supply Drain Current	I_E	8		110		80	100		110	mAdc
Input Current	I_{inH}	5, 10 13 15		415 350 560			260 220 350		260 220 350	μAdc
	I_{inL}	5	0.5		0.5			0.3		μAdc
Output Voltage Logic 1	V_{OH}	2 3	–1.060 –1.060	–0.890 –0.890	–0.960 –0.960		–0.810 –0.810	–0.890 –0.890	–0.700 –0.700	Vdc
Output Voltage Logic 0	V_{OL}	2 3	–1.890 –1.890	–1.675 –1.675	–1.850 –1.850		–1.650 –1.650	–1.825 –1.825	–1.615 –1.615	Vdc
Threshold Voltage Logic 1	V_{OHA}	2 3	–1.080 –1.080		–0.980 –0.980			–0.910 –0.910		Vdc
Threshold Voltage Logic 0	V_{OLA}	2 3		–1.655 –1.655			–1.630 –1.630		–1.595 –1.595	Vdc
Switching Times (50Ω Load)										
Trigger Input	t_{T+Q+} t_{T-Q+}	3 3	2.5 2.5	6.5 6.5	2.5 2.5	4.0 4.0	5.5 5.5	2.5 2.5	6.5 6.5	ns
High Speed Trigger Input	t_{HS+Q+}	3	1.5	3.2	1.5	2.0	2.8	1.5	3.2	ns
Minimum Timing Pulse Width	PW_{Qmin}	3				10.0				ns
Maximum Timing Pulse Width	PW_{Qmax}	3				>10				ms
Min Trigger Pulse Width	PW_T	3				2.0				ns
Min Hi–Spd Trig Pulse Width	PW_{HS}	3				3.0				ns
Rise Time (20 to 80%)		3	1.5	4.0	1.5		3.5	1.5	4.0	ns
Fall Time (20 to 80%)		3	1.5	4.0	1.5		3.5	1.5	4.0	ns
Enable Setup Time	t_{setup} (E)	3				1.0				ns
Enable Hold Time	t_{hold} (E)	3				1.0				ns

1. The monostable is in the timing mode at the time of this test.
2. C_{EXT} = 0 (Pin 4 Open); R_{EXT} = 0 (Pin 6 tied to V_{EE}).
3. C_{EXT} = 10μF (Pin); R_{EXT} = 2.7k (Pin 6).
4. 

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

ELECTRICAL CHARACTERISTICS (continued)


@ Test Temperature			TEST VOLTAGE VALUES (Volts)					
			V_{IHmax}	V_{ILmin}	V_{IHAmin}	V_{ILAmax}	V_{EE}	
–30°C			–0.890	–1.890	–1.205	–1.500	–5.2	
+25°C			–0.810	–1.850	–1.105	–1.475	–5.2	
+85°C			–0.700	–1.825	–1.035	–1.440	–5.2	
Characteristic		**Symbol**	**Pin Under Test**	**TEST VOLTAGE APPLIED TO PINS LISTED BELOW**					**(V_{CC}) Gnd**
				V_{IHmax}	V_{ILmin}	V_{IHAmin}	V_{ILAmax}	V_{EE}	
Power Supply Drain Current		I_E	8					6, 8	1, 4, 16
Input Current		I_{inH}	5, 10 13 15	5,10 13 15				6, 8 6, 8 6, 8	1, 4, 16 1, 4, 16 1, 4, 16
		I_{inL}	5		5			6, 8	1, 4, 16
Output Voltage	Logic 1	V_{OH}	2 3	 13 (4.)	13			6, 8 6, 8	1, 4, 16 1, 4, 16
Output Voltage	Logic 0	V_{OL}	2 3	13 (4.)	 13			6, 8 6, 8	1, 4, 16 1, 4, 16
Threshold Voltage	Logic 1	V_{OHA}	2 3			 15	15	6, 8 6, 8	1, 16, 4 1, 16, 4
Threshold Voltage	Logic 0	V_{OLA}	2 3			15	 15	6, 8 6, 8	1, 16, 4 1, 16, 4
Switching Times	(50Ω Load)			**+1.11V**		**Pulse In**	**Pulse Out**	**–3.2 V**	**+2.0 V**
Trigger Input		t_{T+Q+} t_{T-Q+}	3 3	10 5		13 13	3 3	6, 8 6, 8	1, 16, 4 1, 16, 4
High Speed Trigger Input		t_{HS+Q+}	3			15	3	6, 8	1, 16, 4
Minimum Timing Pulse Width		PW_{Qmin}	3				Note 2.	6, 8	1, 16, 4
Maximum Timing Pulse Width		PW_{Qmax}	3				Note 3.	6, 8	1, 16, 4
Minimum Trigger Pulse Width		PW_T	3			13	3	6, 8	1, 16, 4
Minimum Hi–Spd Trigger Pulse Width		PW_{HS}	3			15	3	6, 8	1, 16, 4
Rise Time	(20 to 80%)		3					6, 8	1, 16, 4
Fall Time	(20 to 80%)		3					6, 8	1, 16, 4
Enable Setup Time		t_{setup} (E)	3			5	3	6, 8	1, 16, 4
Enable Hold Time		t_{hold} (E)	3			5	3	6, 8	1, 16, 4

1. The monostable is in the timing mode at the time of this test.
2. C_{EXT} = 0 (Pin 4 Open); R_{EXT} = 0 (Pin 6 tied to V_{EE}).
3. C_{EXT} = 10μF (Pin); R_{EXT} = 2.7k (Pin 6).
4. 

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN


SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

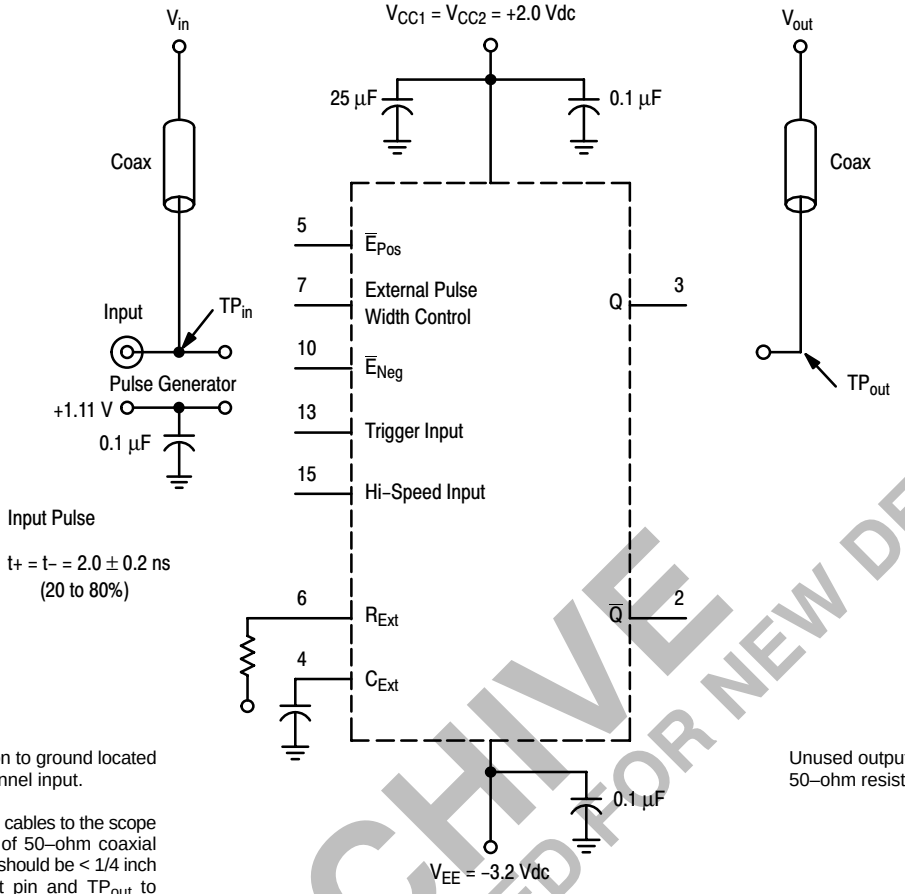

50–ohm termination to ground located in each scope channel input.

All input and output cables to the scope are equal lengths of 50–ohm coaxial cable. Wire length should be < 1/4 inch from TP_{in} to input pin and TP_{out} to output pin.

Unused outputs are tied to a 50–ohm resistor to ground.

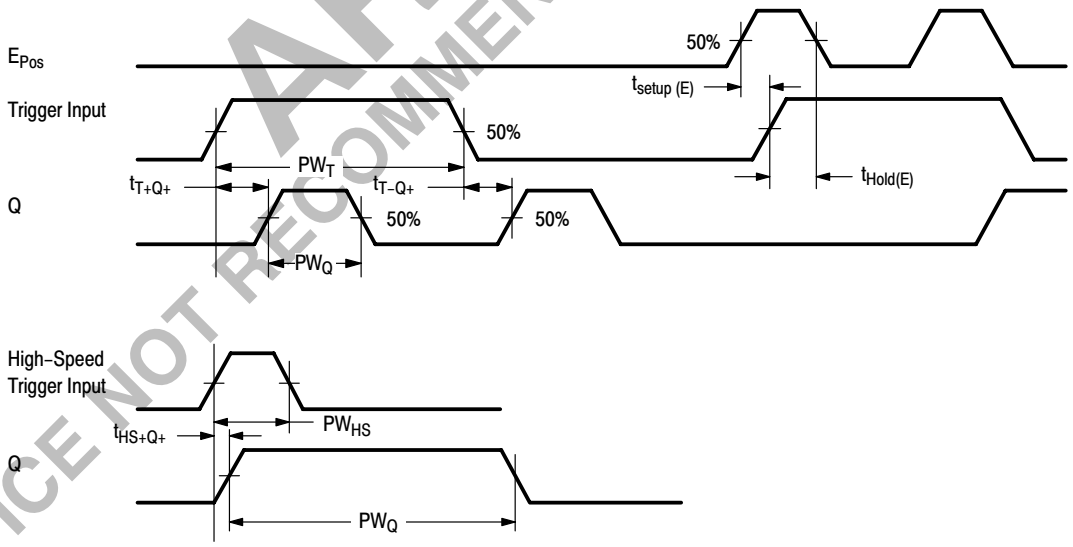

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

APPLICATIONS INFORMATION

Circuit Operation:

1. PULSE WIDTH TIMING Đ The pulse width is determined by the external resistor and capacitor. The MC10198 also has an internal resistor (nominally 284 ohms) that can be used in series with R_{Ext}. Pin 7, the external pulse width control, is a constant voltage node (±3.60 V nominally). A resistance connected in series from this node to V_{EE} sets a constant timing current, I_T. This current determines the discharge rate of the capacitor:

where

DT = pulse width
DV = 1.9 V change in capacitor voltage

Then:

If $R_{Ext} + R_{Int}$ are in series to V_{EE}:

$I_T = [(\pm 3.60\ V) \pm (\pm 5.2\ V)] / [R_{Ext} + 284\Omega]$

$I_T = 1.6\ V/(R_{Ext} + 284)$

The timing equation becomes:

$DT = [(C_{Ext})(1.9\ V)] / [1.6\ V/(R_{Ext} + 284)]$

$DT = C_{Ext}\ (R_{Ext} + 284)\ 1.19$


where DT = Sec
R_{Ext} = Ohms
C_{Ext} = Farads

Figure 2 shows typical curves for pulse width versus C_{Ext} and R_{Ext} =e connected in series from this63 Tm dis8T

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

5. The MC10198 can be made non–retriggerable. The Q output is fed back to disable the trigger input during the triggered state (Logic Diagram). Figure 7 shows a positive triggered configuration; a similar configuration can be made for negative triggering.


FIGURE 7 —

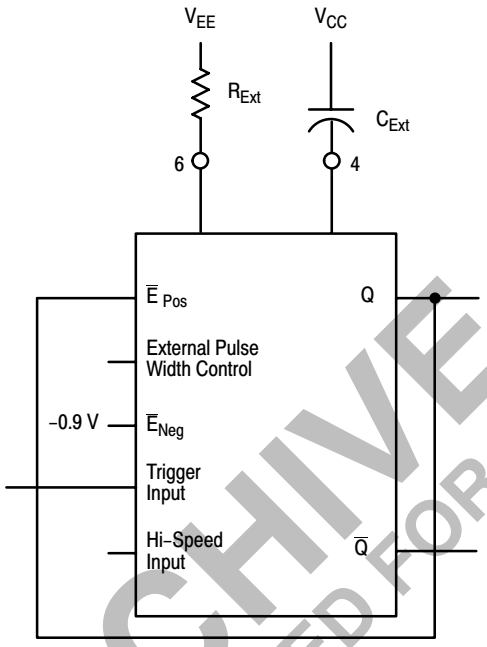

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

PACKAGE DIMENSIONS

PLCC–20
FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 775–02
ISSUE C

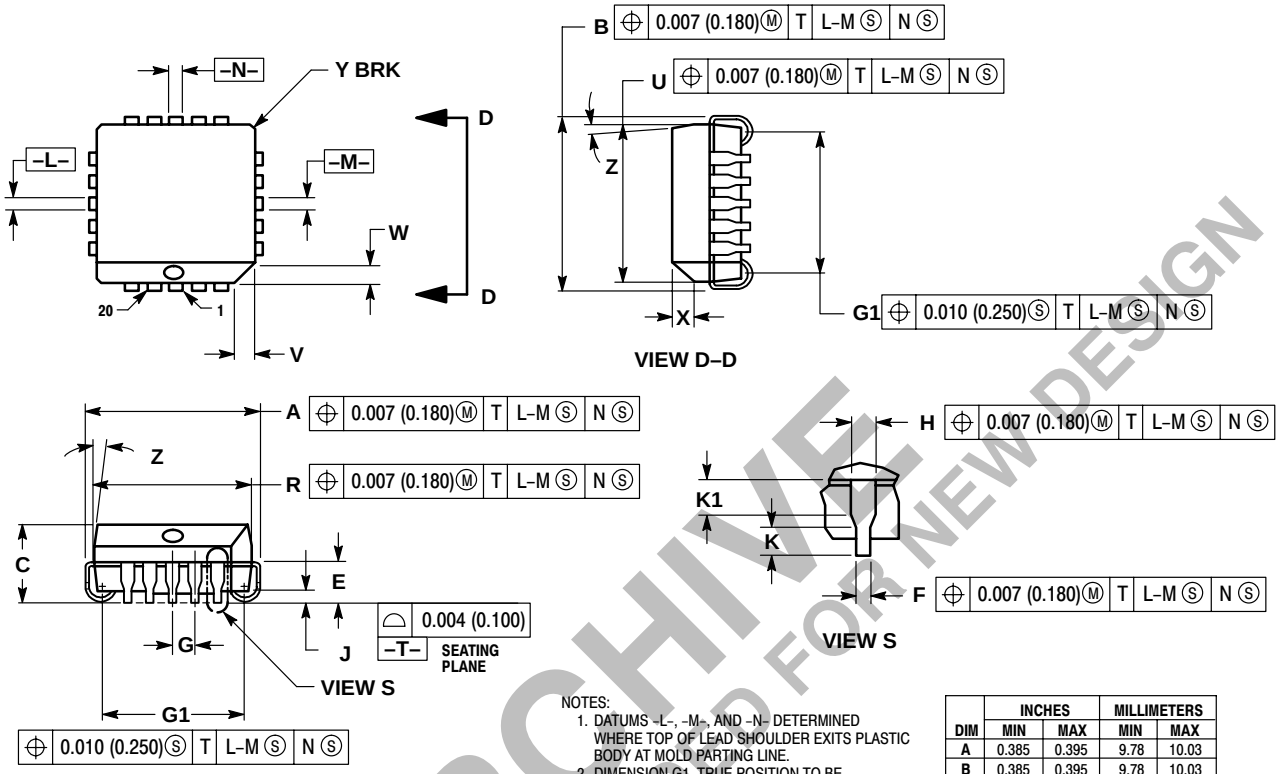


NOTES:
1. DATUMS –L–, –M–, AND –N– DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM –T–, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. CONTROLLING DIMENSION: INCH.
6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.385	0.395	9.78	10.03
B	0.385	0.395	9.78	10.03
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	---	0.51	---
K	0.025	---	0.64	---
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	---	0.020	---	0.50
Z	2 °	10 °	2 °	10 °
G1	0.310	0.330	7.88	8.38
K1	0.040	---	1.02	---

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

PACKAGE DIMENSIONS


CDIP–16
L SUFFIX
CERAMIC DIP PACKAGE
CASE 620–10
ISSUE T

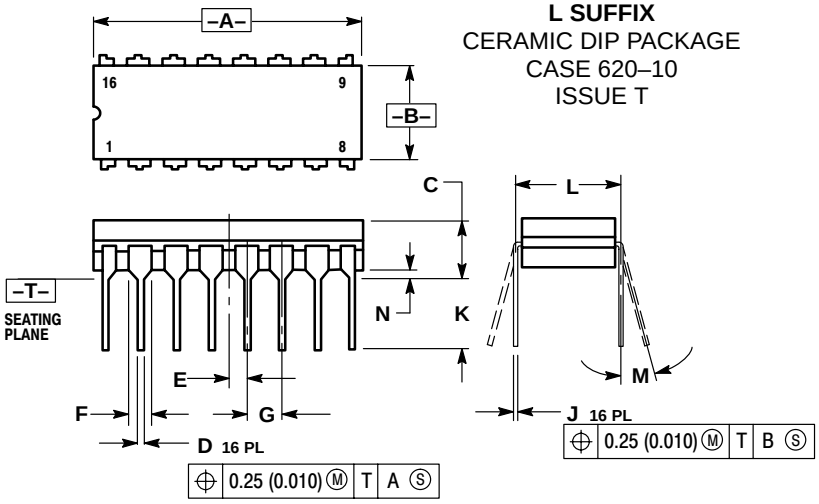

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.750	0.785	19.05	19.93
B	0.240	0.295	6.10	7.49
C	---	0.200	---	5.08
D	0.015	0.020	0.39	0.50
E	0.050 BSC		1.27 BSC	
F	0.055	0.065	1.40	1.65
G	0.100 BSC		2.54 BSC	
H	0.008	0.015	0.21	0.38
K	0.125	0.170	3.18	4.31
L	0.300 BSC		7.62 BSC	
M	0 °	15 °	0 °	15 °
N	0.020	0.040	0.51	1.01

PDIP–16
P SUFFIX
PLASTIC DIP PACKAGE
CASE 648–08
ISSUE R

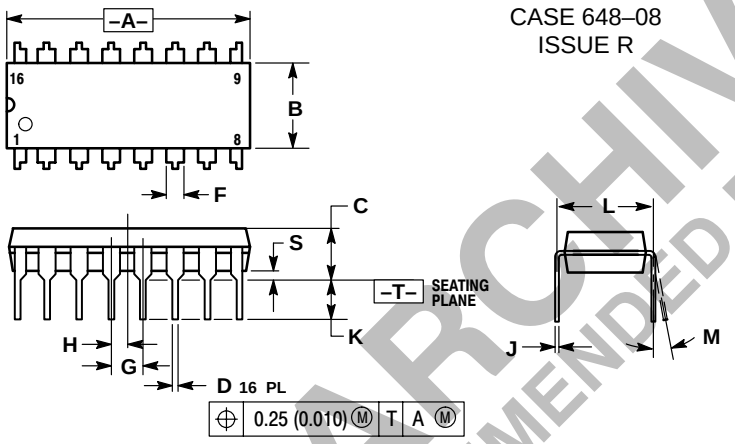

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.740	0.770	18.80	19.55
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.021	0.39	0.53
F	0.040	0.70	1.02	1.77
G	0.100 BSC		2.54 BSC	
H	0.050 BSC		1.27 BSC	
J	0.008	0.015	0.21	0.38
K	0.110	0.130	2.80	3.30
L	0.295	0.305	7.50	7.74
M	0 °	10 °	0 °	10 °
S	0.020	0.040	0.51	1.01

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

ARCHIVE
DEVICE NOT RECOMMENDED FOR NEW DESIGN

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada
Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center
4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031
Phone: 81–3–5740–2700
Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local
Sales Representative.