

622 Mbps PIN-TIA (1310nm) 3.3V & 5V


Features

- ~ 622 Mbps typical bandwidth.
- ~ InGaAs/InP PIN Detector with transimpedance amplifier in a TO-46 hermetic package.
- ~ High sensitivity with AGC.
- ~ Differential ended output
- ~ +3.3V & +5V operation.

Applications

◆ Optical Communication Receiver / Transceiver

- SONET OC-12/SDH STM-4
- Fast Ethernet
- Fiber Channel

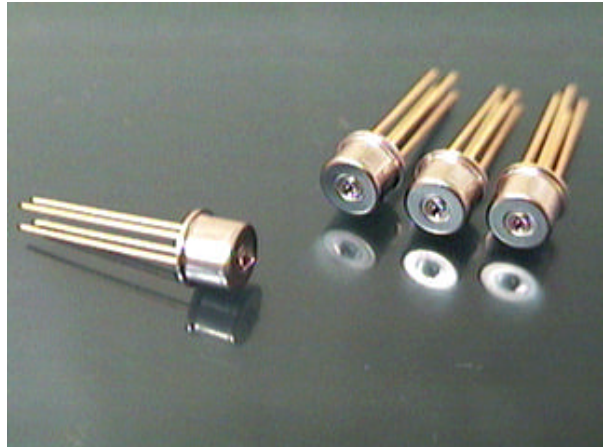

Description

The MCD-3T4C-113 is a high performance 1310 nm InGaAs/InP PIN detector with transimpedance-amplifier .This product is designed for short and medium distance optical fiber communication.

The MCD-3T4C-113 is compatible with industry standard wave or hand solder processes.

Handling and Safety Precautions

Anti-static protection, such as ionized air blowers or grounded wrist straps with a 1 mega series resistor, should be used at all times when handling laser diodes. In addition, soldering irons should be well grounded.

Overheating caused by soldering of the leads of a laser diode must be prevented. Recommend soldering iron temperature and maximum exposure time are below 260 °C and 10 seconds.

- Absolute Maximum Ratings (Tc = 25 °C)


Parameter	Symbol	Rated Value	Unit
Voltage	V	6	V
Operating case temperature	Top	- 40 to +85	°C
Storage temperature	T _{STG}	- 40 to +85	°C

- DC/ Electrical Characteristics (Tc = 25 °C)


Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply power	Vcc	3.0	-	5	V
Differential Output Voltage	Vd	-	-	0.33	V
Supply current (no load)	Icc	-	-	45	mA

- AC/ Optical & Electrical Characteristics (Tc = 25 °C)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Detection Range			1100	1310	1650	nm
Active Area			-	75	-	µm
Gain@10Mbps Differential	G	λ=1300nm	-	19.5	-	V/mW
Bandwidth	BW		440	-	-	MHz
Saturation Power	Psat	λ=1300nm	-3	0	-	dBm
Sensitivity	Sens	BER=10 ⁻¹⁰ @622Mbps	-	-31	-29	dBm
Output Resistance	Rout		-	50	-	ohm
Operation Speed			-	622	-	Mbps

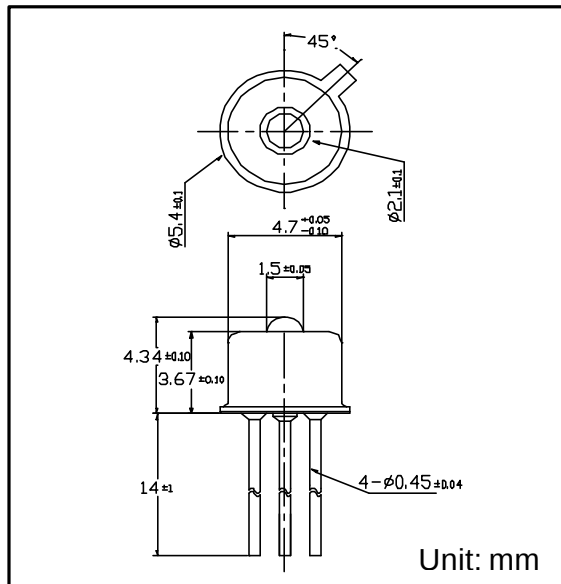

Package Dimensions

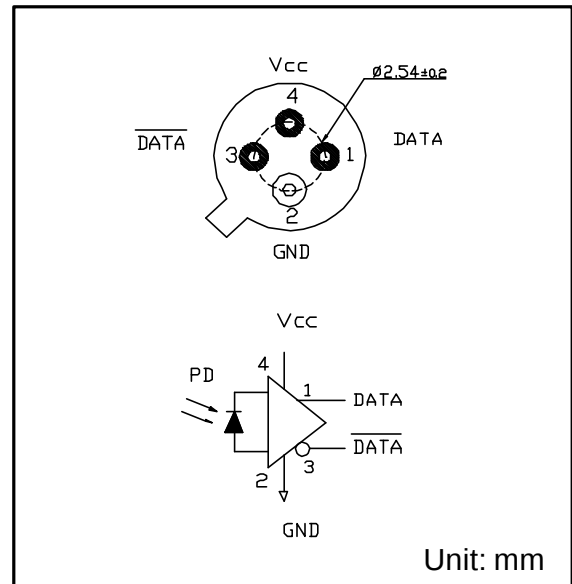

Pin Connections (Bottom View)

NOTE: Specifications are subjected to change without notice.

Unity Opto Technology Co., Ltd

10 F, No. 88-8, Sec. 1, Kuang-Fu Rd.,
Sanchung City, 241 Taipei, Taiwan

For prototype and Production call

TEL: 886 - 2 -2999 - 3988

FAX: 886 - 2 -2999 - 3910

REV.:A1 7/17/2002