
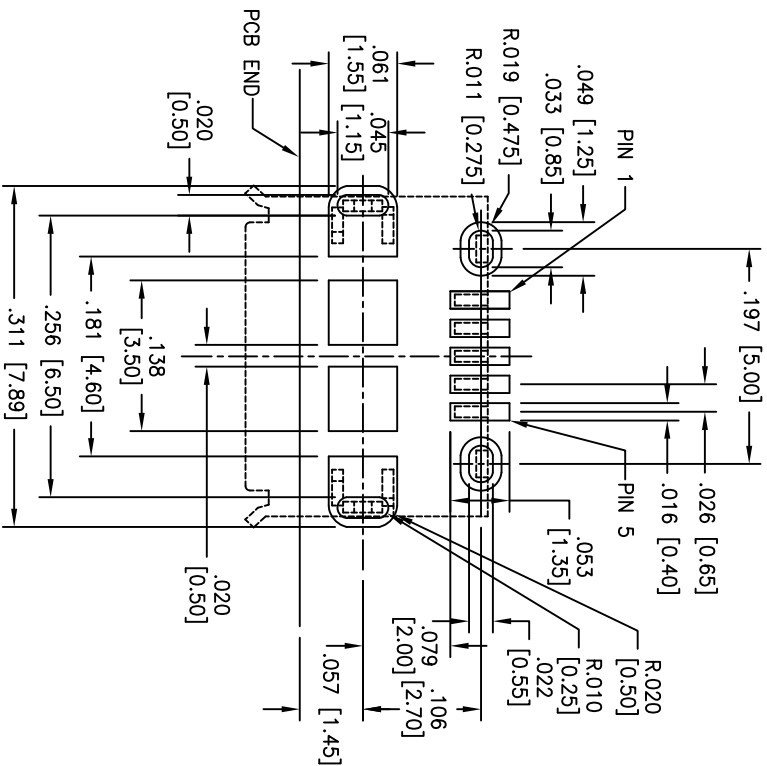
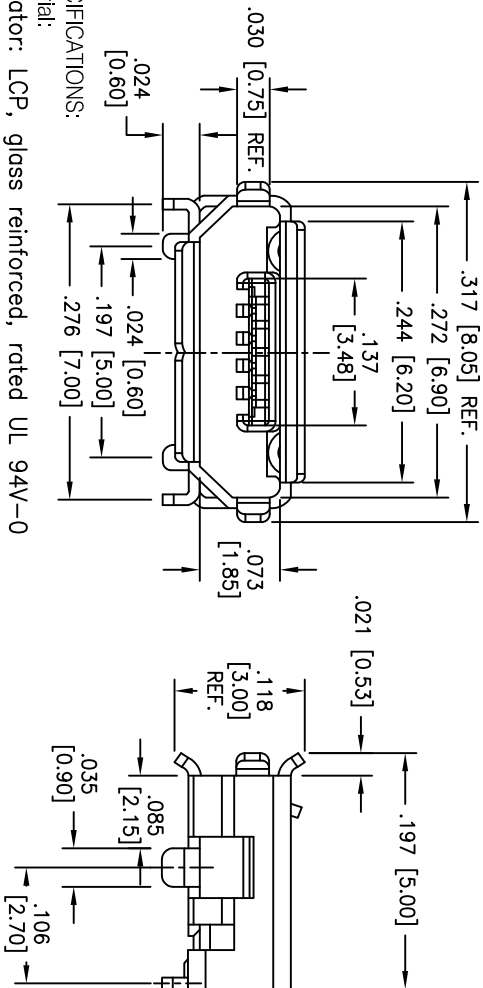


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/21/11	

APPROVED: _____

DATE: _____ TITLE: _____



SPECIFICATIONS:

Material:

Insulator: LCP, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Brass, Matte Tin plated.

Plating:

Gold Flash over Nickel overall

Electrical:

Operating voltage: 30 VAC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max.

Insulation resistance: 1000 Mohms min. @ 100 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Packaging:

Supplied on Tape & Reel

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MICRO USB, TYPE B, SINGLE PORT

FEMALE, DIP SHELL, SMT TYPE, TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED							
INCHES				HOLES			
.XX ± .10				ØXX ± .10			
.XX ± .020				ØXX ± .015			
.XXX ± .015				ØXXX ± .010			
APPROVALS				DATE			
DRAWN	DY	4/21/11					
CHECKED							
APPROVED							
SIZE		PART NO.		REF.		SCALE	
X		MCR-B-S-RA-SMT-CS1-T/R		S00005C		NTS	
						SHEET 1 OF 1	