

6

5

4

3





2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/10	

APPROVED: _____

DATE: _____ TITLE: _____

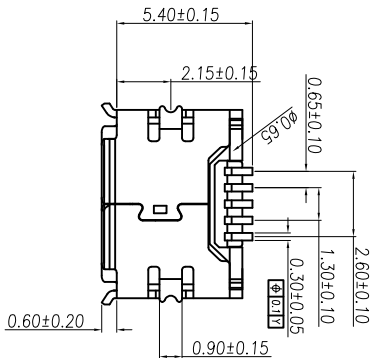

RECOMMEND P.C.B. LAYOUT



PACKAGED ON TAPE AND REEL

SPECIFICATIONS:

Material:

Insulator: Hi-Temp LCP, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Stainless Steel, Nickel over plated

Plating:

Gold Flash over Nickel overall

Electrical:

Operating voltage: 30 VAC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 100 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C o +85° C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260° C for 5 sec.

ROHS
COMPLIANT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MICRO USB, TYPE B, SINGLE PORT
RIGHT ANGLE, SMT, TAPE AND REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				Holes			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	SS	8/5/10					
CHECKED							
APPROVED							
SIZE	PART NO.	MCR-B-S-RA-TSMT-NP-TR		REV.			
X				-			
REF:	SCALE:	NTS	SHEET	1 OF 1			