




Applications	 Commercial Grade
Feature	 For Signal Line
	 4 in 1 Array
Series	MEA
Status	 Production



Size	
Length(L)	2.00mm ±0.15mm
Width(W)	1.00mm ±0.15mm
Thickness(T)	0.50mm ±0.10mm

Electrical Characteristics	
Insertion Loss [Typ.]	20dB (800MHz to 1GHz)
Cut-Off Frequency [Typ.]	310MHz
Rated Voltage [Max.]	6.3V
Rated Current [Max.]	100mA
DC Resistance (Max.)	
Rated Capacitance [Typ.]	4pF


Other	
Circuit Type	L Type
Transmission Line	Single-ended
Operating Temp. Range	-40 to 85°C
Soldering Method	Reflow
	Iron Soldering
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs
Weight	0.005g

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

MEA2010LC040T002




Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

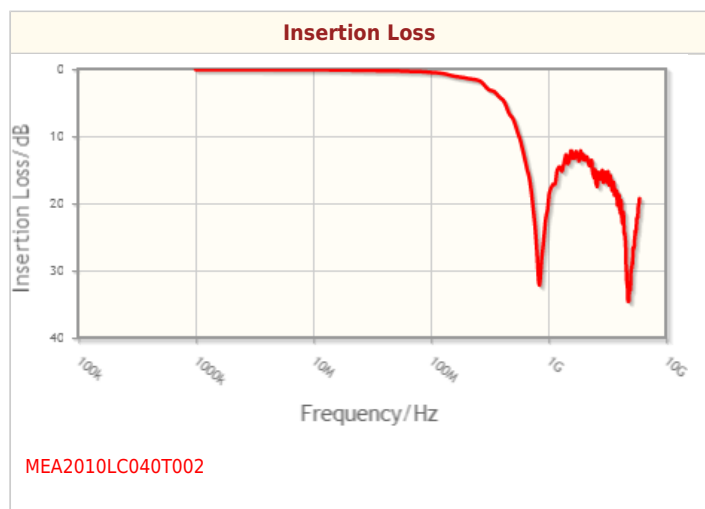




Associated Images

Shapes and Dimensions



Dimensions in mm

Land Pattern (Terminal Connection)



Dimensions in mm

Circuit Diagram

