SERIES: MES3 | **DESCRIPTION:** INCREMENTAL ENCODER

FEATURES
- 5 mm diameter
- 64, 100, or 1024 ppr resolution
- square wave output



RoHS

ELECTRICAL

parameter	conditions/description	min	nom	max	units
power supply	3.2 Vdc ±5% (open collector) 5 Vdc - 5% ~ 12 Vdc + 10% (voltage output, open collector)[1] 5 Vdc ±5% (line driver)[1]				
current consumption	P models PST models			15 20	mA mA
output signals	A, B, Z (voltage output, open collector) A, $\overline{A}$, B, $\overline{B}$, Z, $\overline{Z}$ (line driver)				
output waveform	square wave				
output resolutions	P models 64, 100 PST models 1024 (64 x 16)				PPR PPR
output voltage	V_{OL} V_{OH}	 V_{CC}-0.3		0.3	V V
output current				20	mA
output phase difference	A,B phase difference: T/4 ± T/8 Z phase width: T ± 0.5T				
frequency response				100	kHz
waveform rise/fall time	output cable 300 mm or less			2	µs

Notes: 1. Requires I/F interface module (page 4)

MECHANICAL

parameter	conditions/description	min	nom	max	units
max. shaft load	radial and axial			0.98 100	N gf
starting torque			5×10^{-4} 5		N·m gf·cm
max. rotational speed				6,000	RPM

ENVIRONMENTAL

parameter	conditions/description	min	nom	max	units
operating temperature		0		60	°C
storage temperature		-20		80	°C
humidity	non-condensing	30		95	%
vibration	1.5 mm, 55 Hz, 2 hours each on XYZ				
shock	3 times each on XYZ			50	G

PART NUMBER KEY

MES3 - XXX P XX XX

Base Number


Output Resolution:
64(P) = 64 ppr
100(P) = 100 ppr
64(P)ST = 1,024 ppr

Output Options:
"blank" = 3.2 V Open Collector without I/F box
3 = Option 5 ~ 12 V Voltage Output with I/F box
C3 = Option 5 ~ 12 V Open Collector with I/F box
E = Option 5 V Line Driver with I/F box

OUTPUT WAVEFORM


MES3-P

voltage output / open collector output

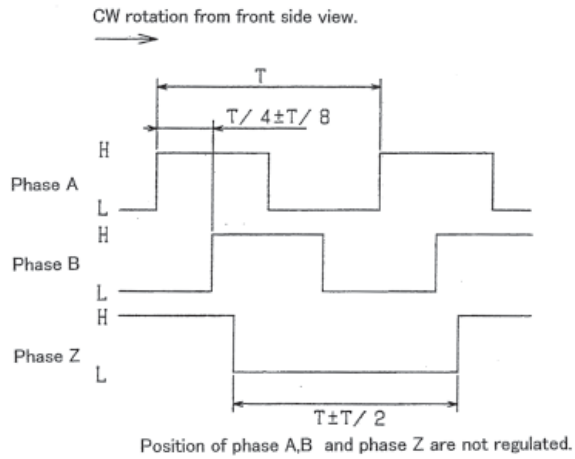

Position of phase A,B and phase Z are not regulated.


line driver output

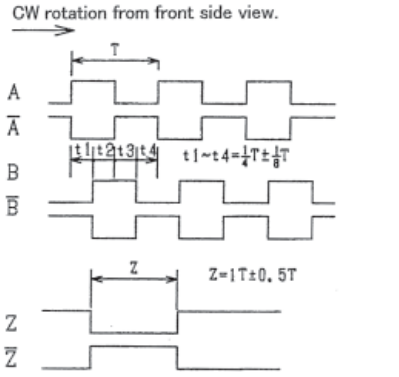


Position of phase A,B and phase Z are not regulated.

MES3-PST

voltage output / open collector output

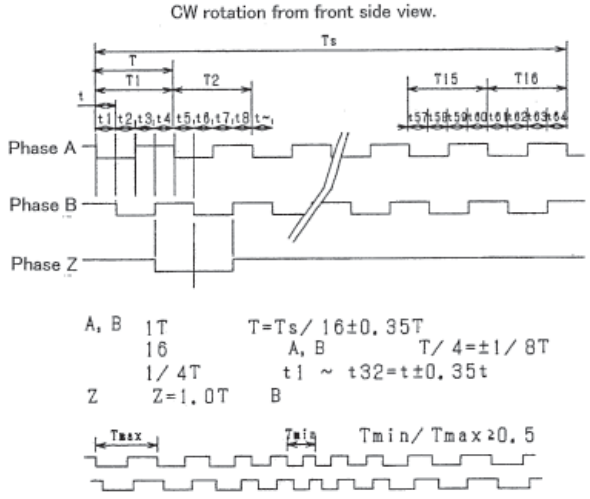


line driver output

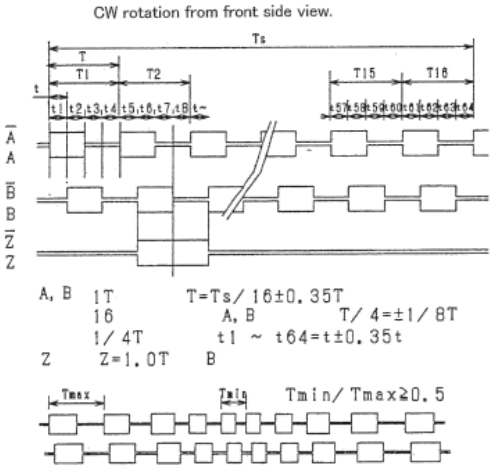


CIRCUIT DIAGRAM


Voltage output

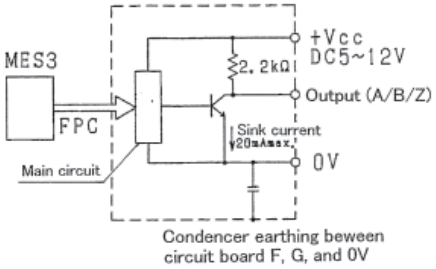

Open collector output

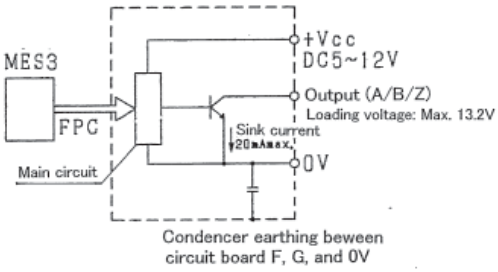

Line driver output

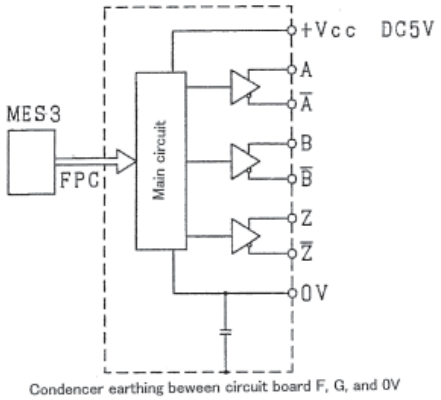


Output IC
SN75ALS192(TI) or same kind


MECHANICAL DRAWING

units: mm[inches]
TOLERANCE: ±0.3mm

MES3-P

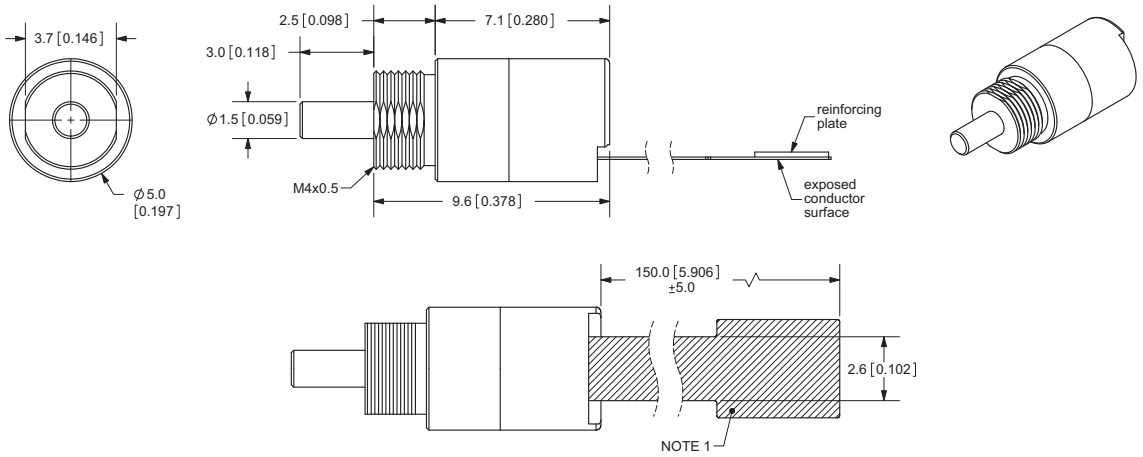


MES3-PST

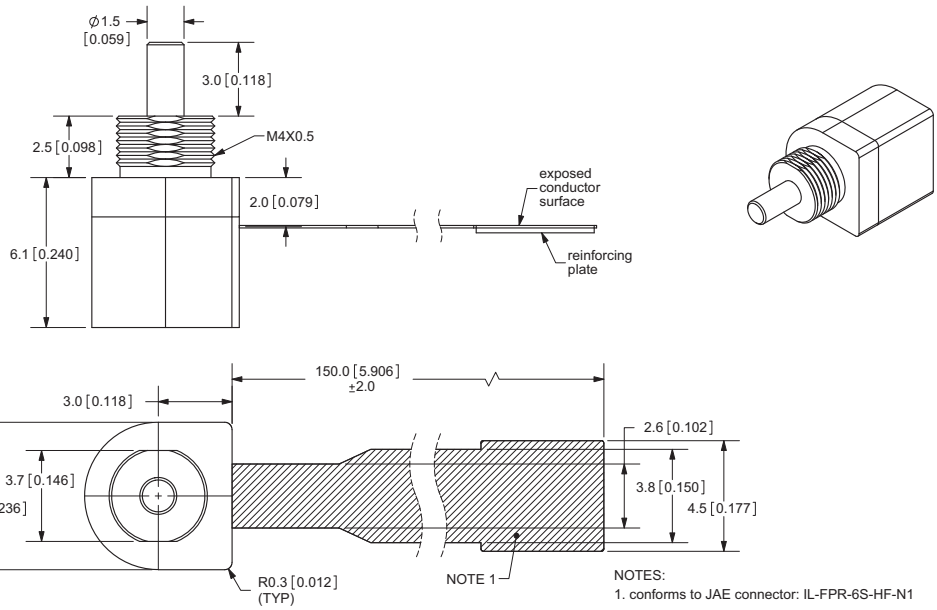


NOTES:
1. conforms to JAE connector: IL-FPR-6S-HF-N1

I/F BOARD


MES3-P

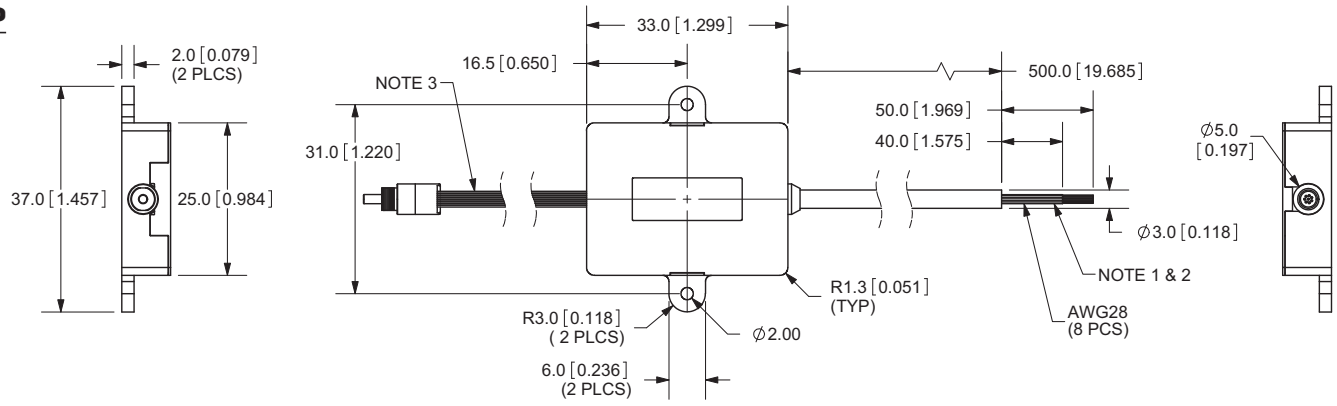


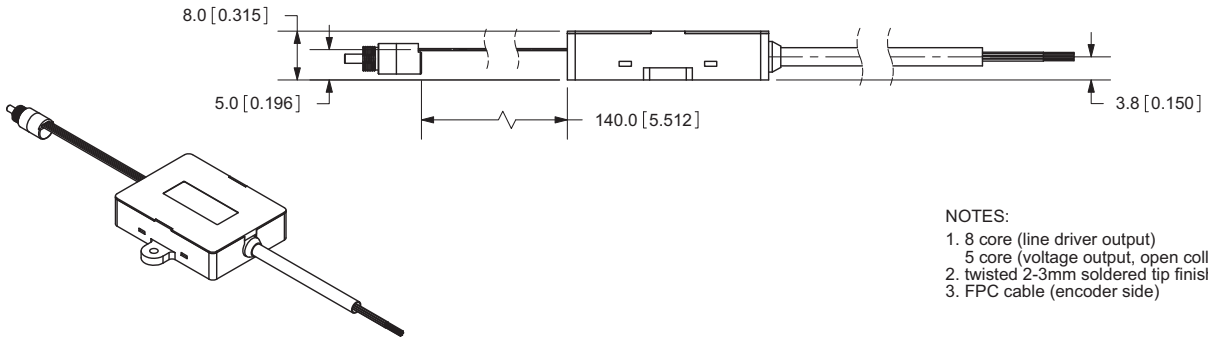

NOTES:
1. 8 core (line driver output)
   5 core (voltage output, open collector output)
2. twisted 2-3mm soldered tip finish
3. FPC cable (encoder side)

MES3-PST

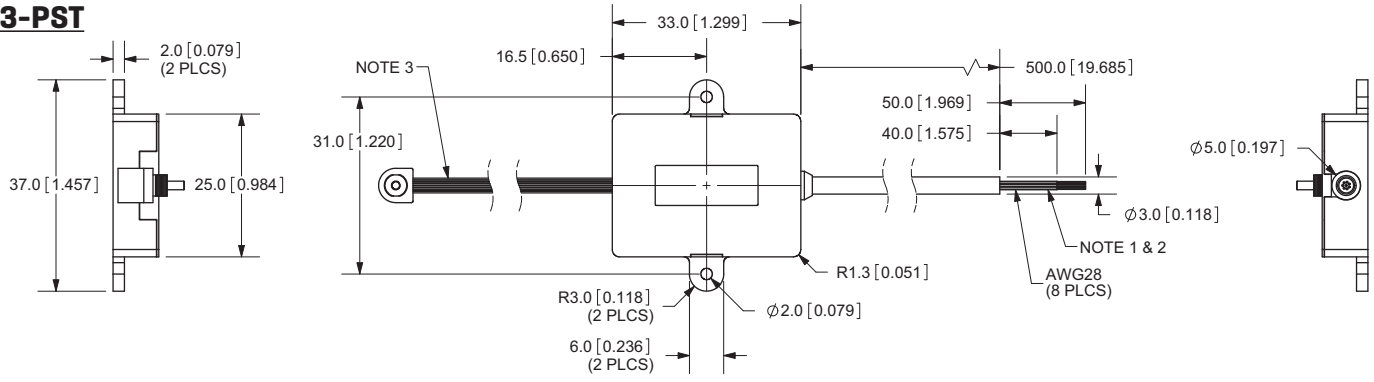

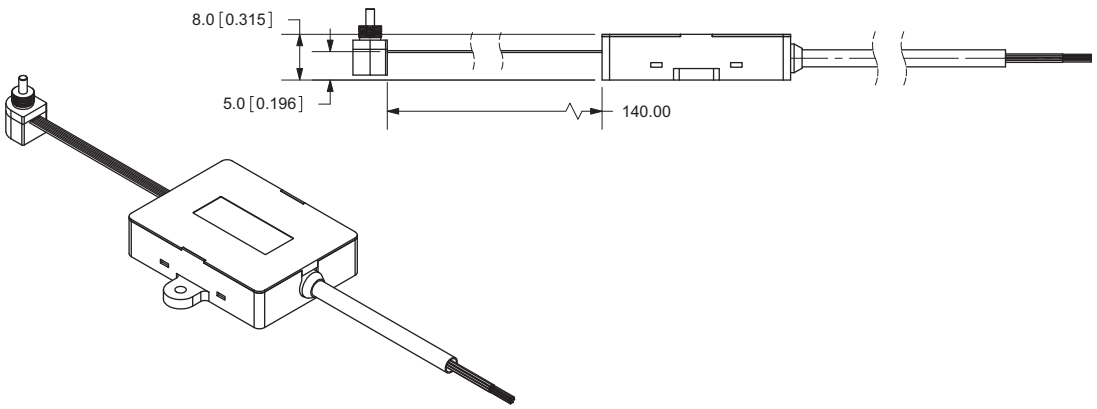

REVISION HISTORY

rev.	description	date
1.0	initial release	10/08/2009
1.01	applied new template	05/14/2012

The revision history provided is for informational purposes only and is believed to be accurate.

CUI INC®

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.