
MEV-50D-R

To be discontinued REACH

Appearance & Shape



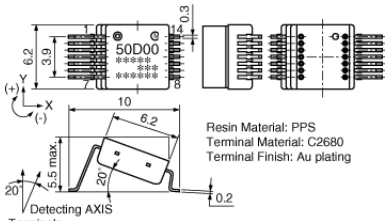

Terminals

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	NC	No Connect.	8	NC	No Connect.
2	LPF1	Low Pass Filter 1	9	NC	No Connect.
3	Vcom	System Ground	10	NC	No Connect.
4	LPF2	Low Pass Filter 2	11	NC	No Connect.
5	Vout	Rate Signal Output	12	NC	No Connect.
6	NC	No Connect.	13	Vcc	Voltage Power Supply
7	NC	No Connect.	14	GND	Analog Ground

(in mm)

Packaging Information

Packaging	Specifications	Minimum Order Quantity
-R	330mm Embossed Tape	200

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

MEV-50D-R

Specifications

Operating Temperature Range	-40℃ to 85℃
Supply Voltage	5 ±0.25V
Output	2.5 +/- 0.3V
Noise Level(max.)	10.0mVp-p
Mass	0.35g
Storage Temperature Range	-40℃ to 95℃
Maximum Range	70deg./sec.
Sensitivity	25.0mV/deg./sec.

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.