

MFF Series

Metal Film, Fusible Resistors




- Fusible Resistor
- Resistances from 1 Ohm to 10K Ohms
- Power Rating 1 to 3 Watts
- Resistance Tolerances of $\pm 5\%$
- TCR: $\pm 250\text{ppm/K}$ Standard



SPECIFICATIONS

Type	Wattage Rating (Watts)	Ohmic Values Tolerances TCR	Dimensions			
			A $\pm 0.040''$ [$\pm 1\text{mm}$]	B $\pm 0.020''$ [$\pm 0.5\text{mm}$]	C $\pm 0.002''$ [$\pm 0.05\text{mm}$]	D MIN
MFFS-1	1	1 Ohm to 10K Ohms $\pm 5\%$ $\pm 250\text{ppm/K}$	0.375 [9.5]	0.138 [3.5]	0.024 [0.6]	0.98 [25]
MFF-1	1		0.472 [12.0]	0.157 [4.0]	0.032 [0.8]	0.94 [24]
MFFS-2	2		0.472 [12.0]	0.157 [4.0]	0.032 [0.8]	0.94 [24]
MFF-2	2		0.630 [16.0]	0.217 [5.5]	0.032 [0.8]	1.26 [32]
MFFS-3	3		0.630 [16.0]	0.217 [5.5]	0.032 [0.8]	1.26 [32]

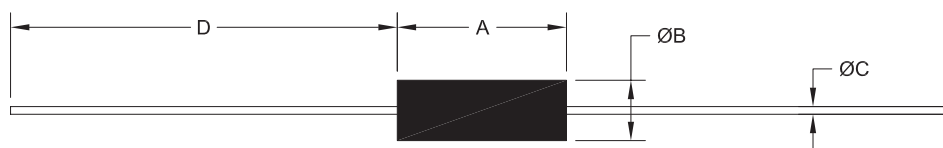

Specification	Value	Minimum Fusing Overload (Time)
Fusing Characteristics	1 Ohm to 3.6 Ohms	15 Times Rated Power (30s MAX)
	1.1K Ohms to 3K Ohms	
	3.9 Ohms to 1K Ohms	12 Times Rates Power (30s MAX)
Temperature Range	-55°C to $+155^{\circ}\text{C}$	
Insulation Resistance	$>10000\text{ MOhms}$	
Max Working Voltage	300V (250V MFFS-1)	
Max Overload Voltage	600V (400V MFFS-1)	
Dielectric Voltage	400V	
Environmental Performance (MIL-STD 202)	ΔR	
Load Life	$\pm 5\%$	
Resistance to Solder Heat	$\pm 0.5\% + 0.05\text{ Ohm}$	
Temperature Cycling	$\pm 1\% + 0.02\text{ Ohm}$	
Short Time Overload	$\pm 2\%$	

Ordering Information

Part Number - Resistance - Tolerance

Example: MFF-2 10 Ohm 5%