Type: MG811


◆ Product Description

- 8.2×8.2mm Max.(L×W), 10.5mm Max. Height.
- Inductance: 100mH Max.
- Operating frequency: 500kHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements

◆ Feature


- Variable shielded high inductance type.
- RoHS Compliance

◆ Dimensions (mm)

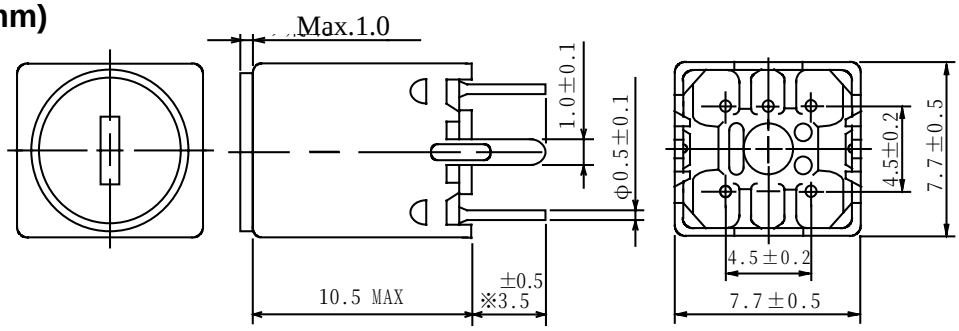


＊ Dimension does not include solder used on coil.
＊ Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)



" S " is winding start.

◆Terminal Layout(mm)

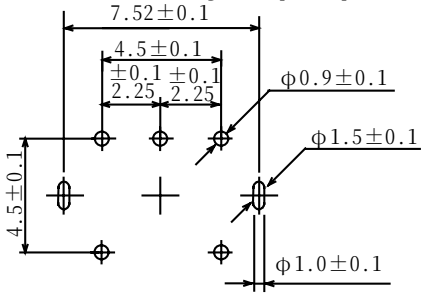

◆ Specification (Part No. 4345-T001)

Item	(1-3)	Measuring Condition
Inductance	2.39mH ± 6% Variable	10kHz
Unloaded Qu	60 Min.	70kHz