FEATURES

- **Industrial Standard DIP-24 Package**
- **Wide 2:1 Input Voltage Range**
- **Fully Regulated Output Voltage**
- **I/O Isolation 1500 VDC**
- **Operating Temp. Range -40℃ to +88℃**
- **Low No Load Power Consumption**
- **No Min. Load Requirement**
- **Overload and Short Circuit Protection**
- **Remote On/Off Control**
- **Shielded Metal Case with Insulated Baseplate**
- **Conducted EMI meets EN55022 Class A & FCC Level A**
- **UL/cUL/IEC/EN 60950-1 Safety Approval (Pending)**

NEW



PRODUCT OVERVIEW

The MINMAX MIW10 series is a new range of cost-optimized 10W isolated dc-dc converter within an encapsulated DIP-24 package. There are 21 models available for 12, 24, 48VDC with wide 2:1 input voltage range. The MIW10 series come in a shielded metal package and internal EMI filter to meets EN55022 & FCC Part15 Class A without external components.

By state-of-the-art circuit topology and 87% high efficiency could be achieved allowing an operating temperature of -40℃ to +80℃ as well as low standby power comsumption. Further features include remote ON/OFF, over current protection, short circuit protection and no min. load requirement as well.

These DC/DC converters offer an economical solution for many cost critical applications in battery-powered equipment, instrumentation, distributed power architectures in communication, industrial electronics, energy facilities and many other critical space applications.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	%
MIW10-12S033	12 (9 ~ 18)	3.3	2700	863	20	1000	86
MIW10-12S05		5	2000	980			85
MIW10-12S051		5.1	2000	1000			85
MIW10-12S12		12	833	947		470	88
MIW10-12S15		15	666	935		330	89
MIW10-12D12		±12	±416	945		220#	88
MIW10-12D15		±15	±333	935		150#	89
MIW10-24S033	24 (18 ~ 36)	3.3	2700	432	15	1000	86
MIW10-24S05		5	2000	490			85
MIW10-24S051		5.1	2000	500			85
MIW10-24S12		12	833	468		470	89
MIW10-24S15		15	666	468		330	89
MIW10-24D12		±12	±416	473		220#	88
MIW10-24D15		±15	±333	468		150#	89
MIW10-48S033	48 (36 ~ 75)	3.3	2700	216	10	1000	86
MIW10-48S05		5	2000	245			85
MIW10-48S051		5.1	2000	250			85
MIW10-48S12		12	833	239		470	87
MIW10-48S15		15	666	237		330	88
MIW10-48D12		±12	±416	244		220#	87
MIW10-48D15		±15	±333	237		150#	88

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	---	---	9	
	24V Input Models	---	---	18	
	48V Input Models	---	---	36	
Under Voltage Shutdown	12V Input Models	---	---	8.5	
	24V Input Models	---	---	17	
	48V Input Models	---	---	34	
Input Filter	All Models	Internal Pi Type			

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0~1.2V or Short Circuit (Pin 1 and Pin 2)				
Control Input Current (on)	Vctrl = 5V	---	---	500	μA
Control Input Current (off)	Vctrl = 0V	---	---	-500	μA
Control Common	Referenced to Negative Input				
Standby Input Current		---	---	10	mA

Output Specifications

Parameter	Conditions		Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy			---	±1	±2	%Vom.
Output Voltage Balance	Dual Output, Balanced Loads		---	±1	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load		---	±0.5	±1.0	%
Load Regulation	Io=0% to 100%		---	±0.5	±1.2	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	3.3 & 5V Output	---	80	---	mV_{P-P}
		Other Output	---	100	---	mV_{P-P}
Transient Recovery Time	25% Load Step Change		---	300	600	μsec
Transient Response Deviation			---	±3	±5	%
Temperature Coefficient			---	±0.01	±0.02	%/℃
Over Load Protection	Hiccup		110	150	---	%
Short Circuit Protection	Hiccup Mode 0.7Hz typ. Automatic Recovery					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	1000	1500	pF
Switching Frequency		---	330	---	KHz
MTBF (calculated)	MIL-HDBK-217F@25℃, Ground Benign	1,000,000	---	---	Hours
Safety Approvals (Pending)	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-report)				


Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+85	℃
Case Temperature		---	+105	℃
Storage Temperature Range		-50	+125	℃
Humidity (non condensing)		---	95	% rel. H
Cooling	Natural Convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	℃

EMC Specifications

Parameter	Standards & Level		Performance
EMI	Conduction	EN55022, FCC part 15	Class A
EMS	EN55024		
	ESD	EN61000-4-2 Air ± 8kV , Contact ± 6kV	A
	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient (5)	EN61000-4-4 ±2kV	A
	Surge (5)	EN61000-4-5 ±1kV	A
	Conducted immunity	EN61000-4-6 10Vrms	A

Power Derating Curve

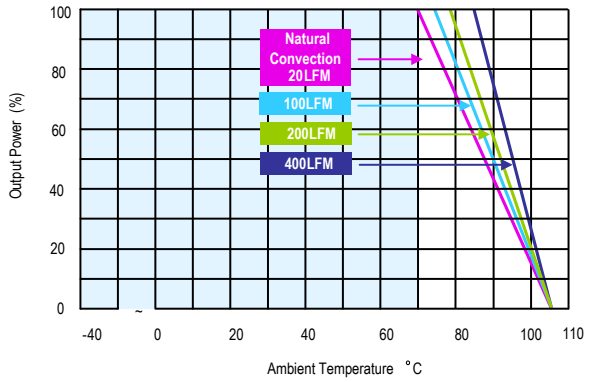


Notes

1 Specifications typical at Ta=+25℃, resistive load, nominal input voltage and rated output current unless otherwise noted.
2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%
3 We recommend to protect the converter by a fast blow fuse in the input supply line.
4 Other input and output voltages may be available, please contact factory.
5 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required.Suggested capacitor: 220μF/100V.
6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
7 Specifications are subject to change without notice.

Package Specifications

Mechanical Dimensions

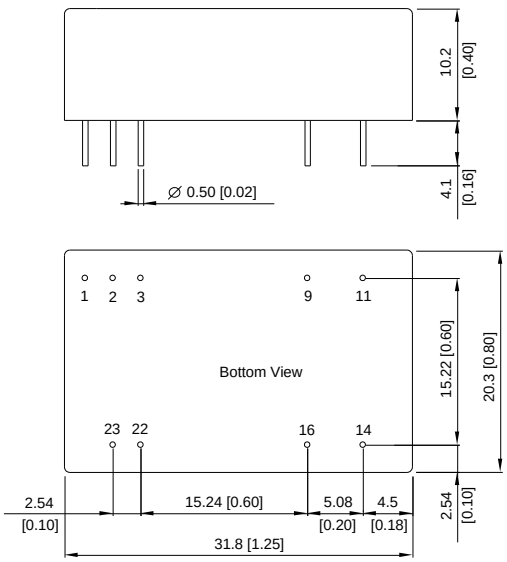

Pin Connections

Pin	Single Output	Dual Output
1	Remote On/Off	Remote On/Off
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

NC: No Connection

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
  X.XX±0.25 (X.XXX±0.01)
- Pin diameter ∅ 0.5 ±0.05 (0.02±0.002)

Physical Characteristics


Case Size	:	31.8x20.3x10.2mm (1.25x0.80x0.40 inches)
Case Material	:	Metal with Non-Conductive Baseplate
Pin Material	:	Tinned Copper
Weight	:	17.3g

Tentative

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.47μF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

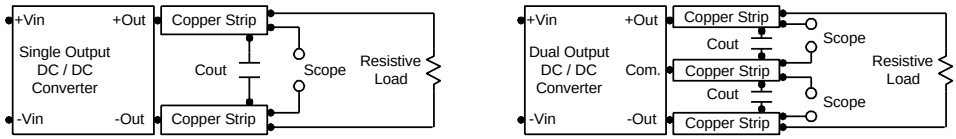

Technical Notes

Overload Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.
In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.
By using a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 12μF for the 12V, 4.7μF for the 24V input devices and a 2.2μF for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

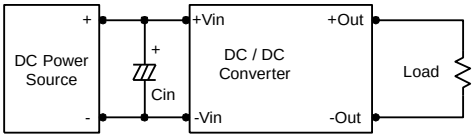

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3μF capacitors at the output.



Maximum Capacitive Load

The MIW10 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105℃.
The derating curves are determined from measurements obtained in a test setup.

