
SGS-THOMSON MICROELECTRONICS

MJD112
MJD117

COMPLEMENTARY SILICON POWER DARLINGTON TRANSISTORS

- SGS-THOMSON PREFERRED SALESTYPES
- LOW BASE-DRIVE REQUIREMENTS
- INTEGRATED ANTIPARALLEL COLLECTOR-EMITTER DIODE
- SURFACE-MOUNTING TO-252 (DPAK) POWER PACKAGE IN TAPE & REEL (SUFFIX "T4")
- ELECTRICAL SIMILAR TO TIP112 AND TIP117



DPAK
TO-252
(Suffix "T4")

APPLICATIONS


- GENERAL PURPOSE SWITCHING AND AMPLIFIER

DESCRIPTION

The MJD112 and MJD117 form complementary PNP - NPN pairs.

They are manufactured using Epitaxial Base technology for cost-effective performance.

INTERNAL SCHEMATIC DIAGRAM

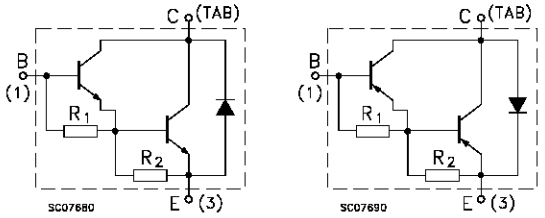

R1(typ) = 7KΩ
R2(typ) = 200Ω

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Emitter Voltage (I_E = 0)	100	V
V_{CEO}	Collector-Emitter Voltage (I_B = 0)	100	V
V_{EBO}	Emitter-Base Voltage (I_C = 0)	5	V
I_C	Collector Current	2	A
I_{CM}	Collector Peak Current (t_p < 5 ms)	4	A
I_B	Base Current	0.05	A
P_{tot}	Total Dissipation at T_c = 25 °C	20	W
T_{stg}	Storage Temperature	-65 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C

For PNP type voltage and current values are negative.

THERMAL DATA


$R_{thj\text{-}case}$	Thermal Resistance Junction-case	Max	6.25	$^oC/W$
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient	Max	100	$^oC/W$

ELECTRICAL CHARACTERISTICS (T_{case} = 25 ^oC unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cut-off Current (I_E = 0)	V_{CB} = 100 V V_{CB} = 80 V			0.02 0.01	mA mA
I_{CEO}	Collector Cut-off Current (I_B = 0)	V_{CE} = 50 V			0.02	mA
I_{CEX}	Collector Cut-off Current	V_{CB} = 80 V V_{BE} = -1.5V V_{CB} = 80 V V_{BE} = -1.5V T_c = 125 ^oC			0.01 0.5	mA mA
I_{EBO}	Emitter Cut-off Current (I_C = 0)	V_{EB} = 5 V			2	mA
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage	I_C = 30 mA	100			V
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 2 A I_B = 8 mA I_C = 4 A I_B = 40 mA			2 3	V V
$V_{BE(sat)}$*	Collector-Base Saturation Voltage	I_C = 4 A I_B = 40 mA			4	V
$V_{BE(on)}$*	Base-Emitter Voltage	I_C = 2 A V_{CE} = 3 V			2.8	V
h_{FE}*	DC Current Gain	I_C = 0.5 A V_{CE} = 3 V I_C = 2 A V_{CE} = 3 V I_C = 4 A V_{CE} = 3 V	500 1000 200		 12000	

* Pulsed: Pulse duration = 300 μs, duty cycle ≤ 2 %


Safe Operating Areas

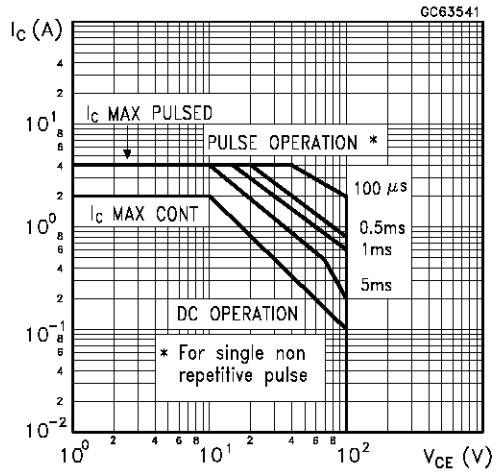


Derating Curve

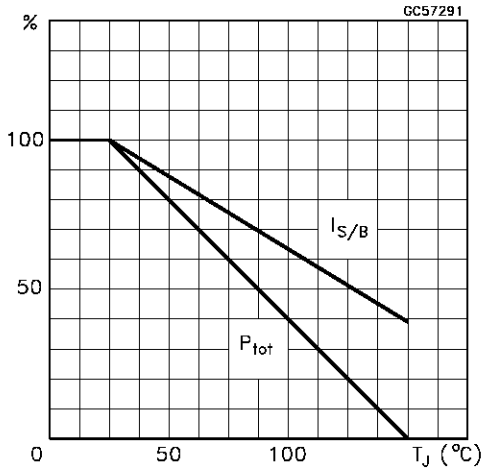


DC Current Gain (NPN type)

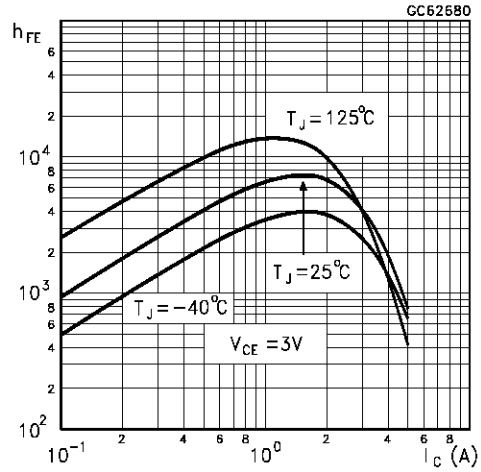


DC Current Gain (NPN type)

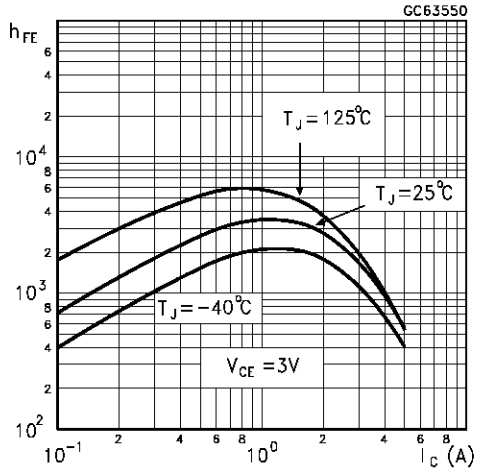


Collector-Emitter Saturation Voltage (NPN type)

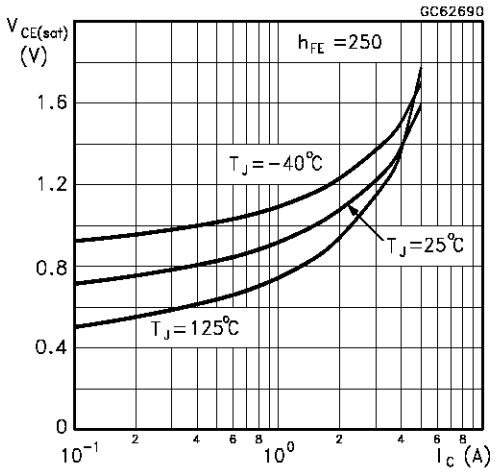


Collector-Emitter Saturation Voltage (PNP type)

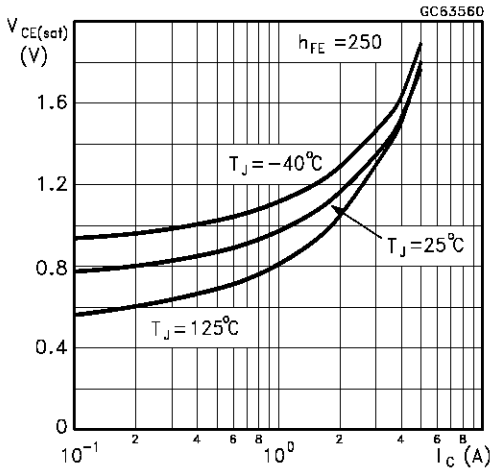


Base-Emitter Saturation Voltage (NPN type)

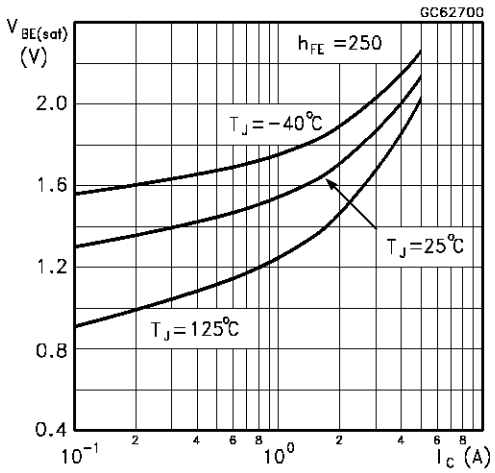


Base-Emitter Saturation Voltage (PNP type)

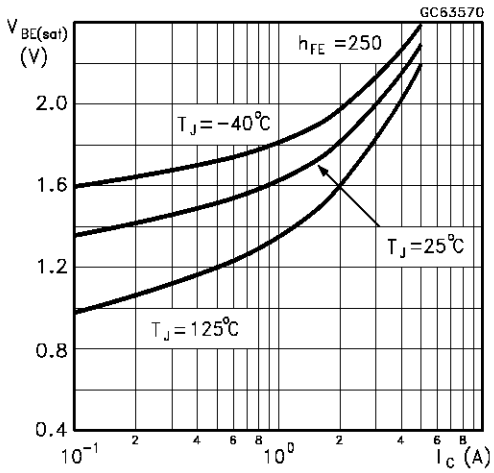


Base-Emitter On Voltage (NPN type)

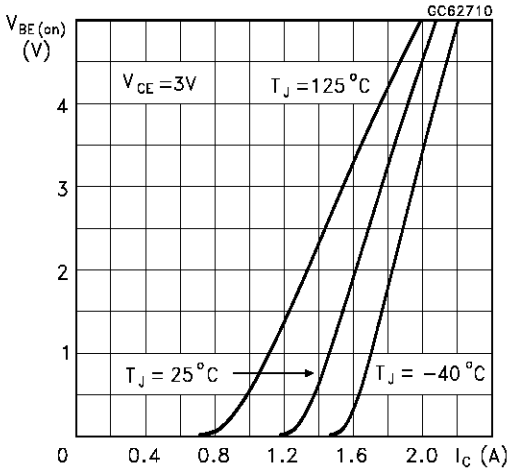


Base-Emitter On Voltage (PNP type)

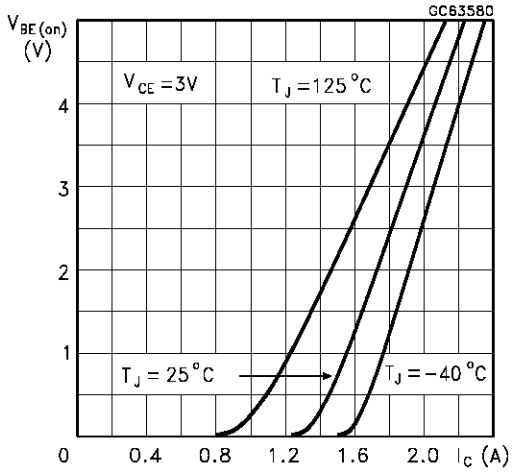

Freewheel Diode Forward Voltage (NPN types)

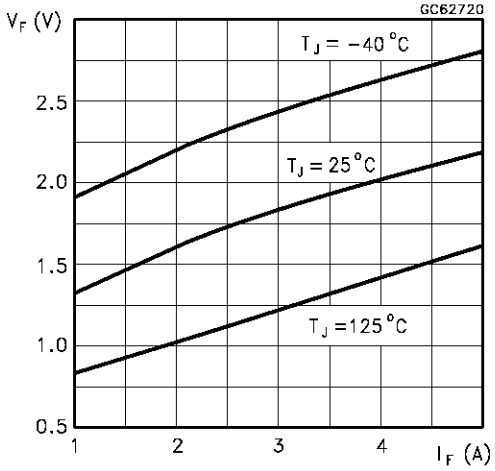


Freewheel Diode Forward Voltage (PNP types)

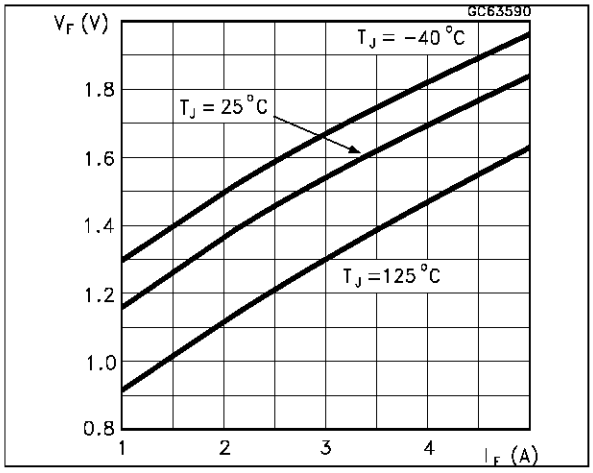

TO-252 (DPAK) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	2.2		2.4	0.086		0.094
A1	0.9		1.1	0.035		0.043
A2	0.03		0.23	0.001		0.009
B	0.64		0.9	0.025		0.035
B2	5.2		5.4	0.204		0.212
C	0.45		0.6	0.017		0.023
C2	0.48		0.6	0.019		0.023
D	6		6.2	0.236		0.244
E	6.4		6.6	0.252		0.260
G	4.4		4.6	0.173		0.181
H	9.35		10.1	0.368		0.397
L2		0.8			0.031	
L4	0.6		1	0.023		0.039

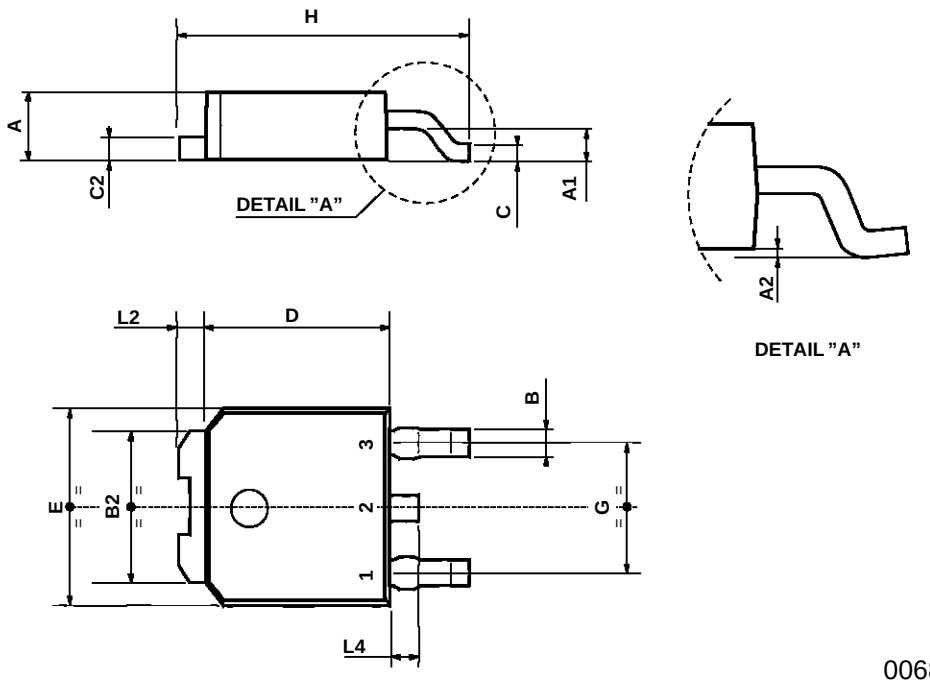

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A

. . .