


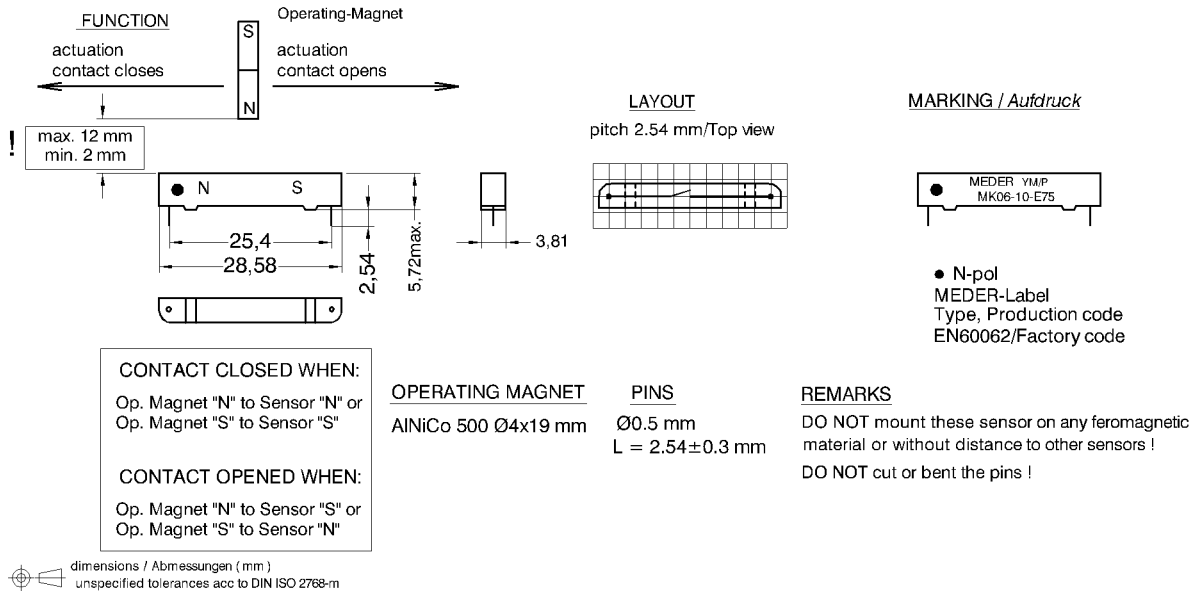

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - form		E - bistable NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Operating voltage	DC or Peak AC			500	V
Carry current	DC or Peak AC			1	A
Switching current	DC or Peak AC			0,5	A
Breakdown voltage		1.000			VDC
Sensor-resistance	measured with 40% overdrive Sensor deactivated			200	mOhm
Housing material		PBT glass fibre reinforced			
Case color		blue			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			30	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		70	°C
Storage temperature		-35		95	°C
Cleaning		fully sealed			