


Metallized Polyester Film Capacitors

MKT Radial Potted Type

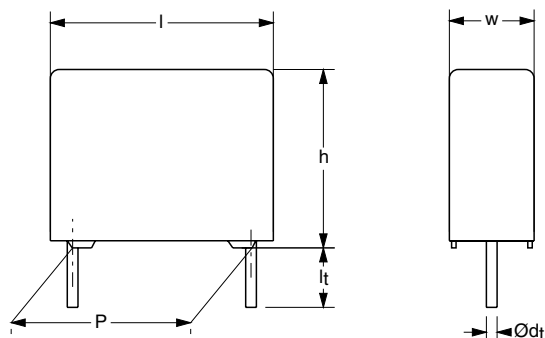

Dimensions in mm

APPLICATIONS

Blocking and coupling. Bypass and energy reservoir

MARKING

C-value; tolerance; rated voltage; code for manufacturer; year and week of manufacturer; manufacturer's type designation

DIELECTRIC

Polyester film

ELECTRODES

Vacuum deposited aluminum

ENCAPSULATION

Flame retardant plastic case and epoxy resin (UL-class 94 V-0)

CONSTRUCTION

Wound mono construction

LEADS

Tinned wire

CAPACITANCE RANGE (E12 SERIES)

0.0047 to 0.68 μ F

FEATURES

Available taped and loose in box

Lead (Pb)-free product

RoHS-compliant product

CAPACITANCE TOLERANCE

$\pm 10 \%$; $\pm 5 \%$

RATED (DC) VOLTAGE

100 V; 250 V; 400 V; 630 V

RATED (AC) VOLTAGE

63 V; 160 V; 220 V; 250 V

CLIMATIC CATEGORY

55/105/56

RATED TEMPERATURE

85 °C

MAXIMUM APPLICATION TEMPERATURE

100 °C

REFERENCE SPECIFICATIONS

IEC 60384-2

PERFORMANCE GRADE

Grade 1 (long life)


DETAIL SPECIFICATION

For more detailed data and test requirements contact:
filmcaps.roeselare@vishay.com



RoHS
COMPLIANT

COMPOSITION OF CATALOG NUMBER

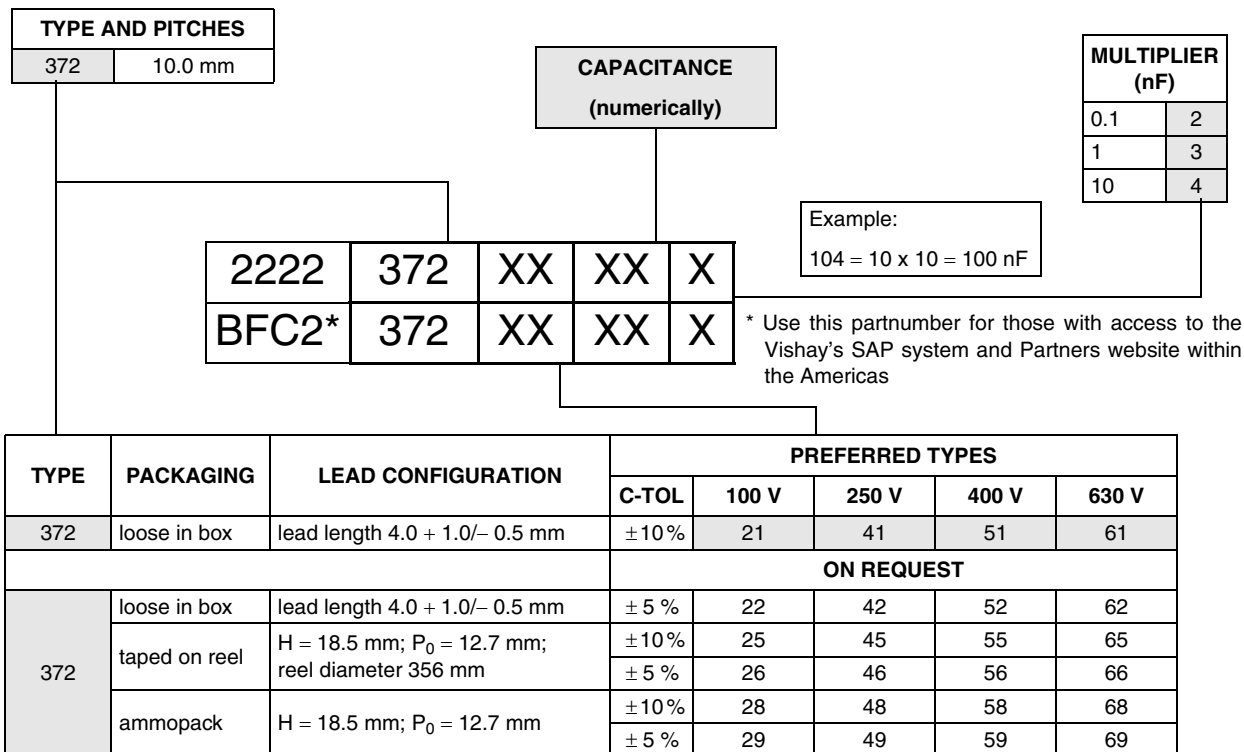

SPECIFIC REFERENCE DATA

DESCRIPTION	VALUE			
Tangent of loss angle: C ≤ 0.1 μF 0.1 μF < C ≤ 0.68 μF	at 1 kHz	at 10 kHz	at 100 kHz	
	≤ 75 × 10 ⁻⁴	≤ 130 × 10 ⁻⁴	≤ 250 × 10 ⁻⁴	
	≤ 75 × 10 ⁻⁴	≤ 130 × 10 ⁻⁴	≤ 300 × 10 ⁻⁴	
Rated voltage pulse slope (dU/dt) _R	at 100 V (DC)	at 250 V (DC)	at 400 V (DC)	at 630 V (DC)
	34 V/μs	50 V/μs	80 V/μs	120 V/μs
R between leads, for C ≤ 0.33 μF: at 100 V; 1 minute at 500 V; 1 minute	> 15000 MΩ	> 30000 MΩ	> 30000 MΩ	> 30000 MΩ
RC between leads, for C > 0.33 μF at 100 V; 1 minute	> 5000 s			
R between interconnected leads and case (foil method)	> 30000 MΩ	> 30000 MΩ	> 30000 MΩ	> 30000 MΩ
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute	400 V; 1 minute	640 V; 1 minute	1008 V; 1 minute
Withstanding (DC) voltage between leads and case	200 V; 1 minute	500 V; 1 minute	800 V; 1 minute	1260 V; 1 minute

**Metallized Polyester Film Capacitors Vishay BCcomponents**
MKT Radial Potted Type **$U_{Rdc} = 100\text{ V}$; $U_{Rac} = 63\text{ V}$**

C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/– 0.5 mm			
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.1 0.12 0.15 0.18	4.0 × 10.0 × 12.5	0.7	21104	1000	1400	750
			21124			
			21154			
			21184			
0.22 0.27 0.33	4.0 × 10.0 × 12.5	0.7	21224	1000	1400	750
			21274			
			21334			
0.39 0.47	5.0 × 11.0 × 12.5	0.9	21394	1000	1100	600
			21474			
0.56 0.68	6.0 × 12.0 × 12.5	1.0	21564	750	900	500
			21684			

 $U_{Rdc} = 250\text{ V}$; $U_{Rac} = 160\text{ V}$







C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm		SPQ	SPQ
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.047 0.056 0.068 0.082 0.1	4.0 × 10.0 × 12.5	0.7	41473	1000	1400	750
			41563			
			41683			
			41823			
			41104			
0.12 0.15	5.0 × 11.0 × 12.5	0.9	41124	1000	1100	600
			41154			
0.18 0.22	6.0 × 12.0 × 12.5	1.0	41184	750	900	500
			41224			



$U_{Rdc} = 400 \text{ V}$; $U_{Rac} = 220 \text{ V}$

C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.0047 0.0056 0.0068 0.0082 0.01 0.012 0.015 0.018 0.022 0.027 0.033	4.0 × 10.0 × 12.5	0.7	51472 51562 51682 51822 51103 51123 51153 51183 51223 51273 51333	1000	1400	750
0.039 0.047 0.056	5.0 × 11.0 × 12.5	0.9	51393 51473 51563	1000	1100	600
0.068 0.082	6.0 × 12.0 × 12.5	1.0	51683 51823	750	900	500



 $U_{Rdc} = 630 \text{ V}$; $U_{Rac} = 250 \text{ V}$

C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm		SPQ	SPQ
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.01	4.0 × 10.0 × 12.5	0.6	61103	1000	1400	750
0.012			61123			
0.015			61153			
0.018			61183			
0.022			61223			
0.027	5.0 × 11.0 × 12.5	0.9	61273	1000	1100	600
0.033			61333			
0.039	6.0 × 12.0 × 12.5	1.0	61393	750	900	500
0.047			61473			

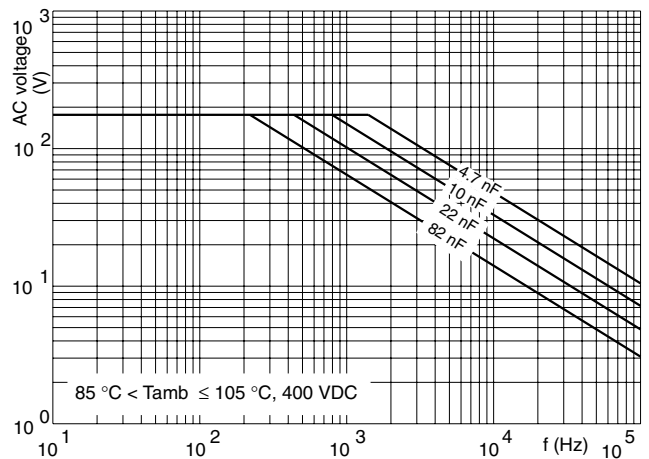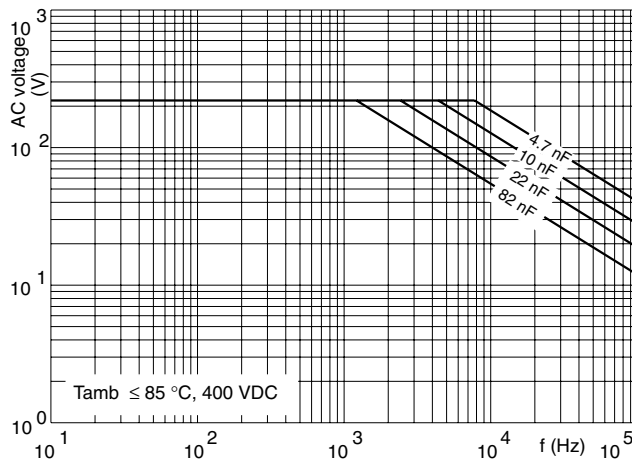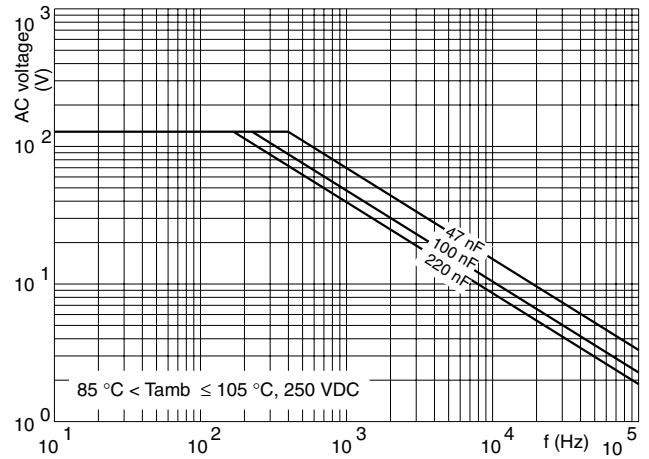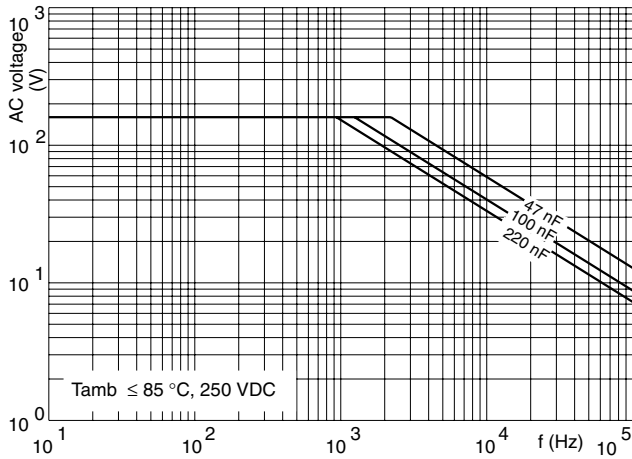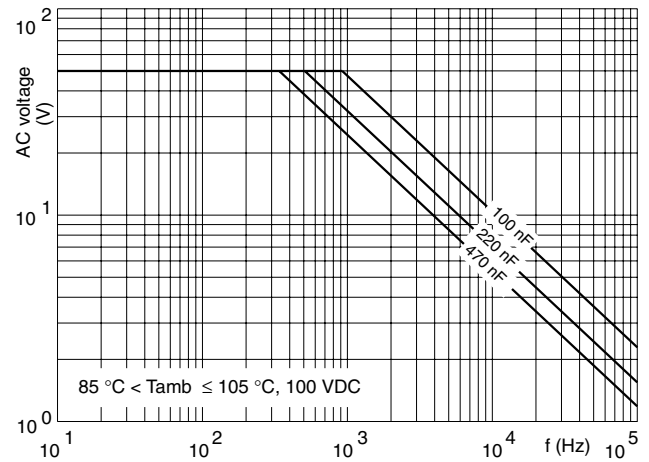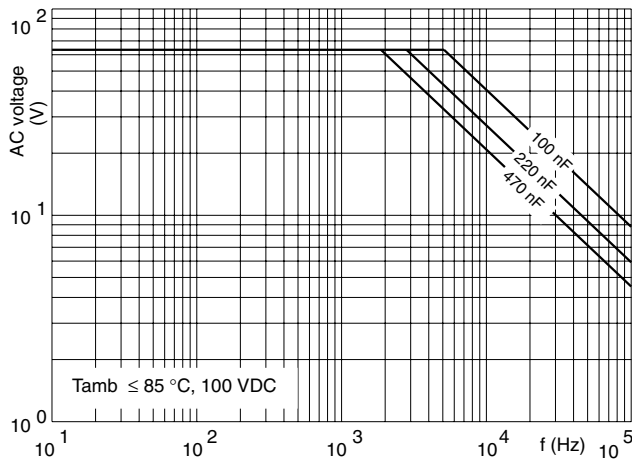
**MAXIMUM RMS VOLTAGE (SINEWAVE) AS A FUNCTION OF FREQUENCY**

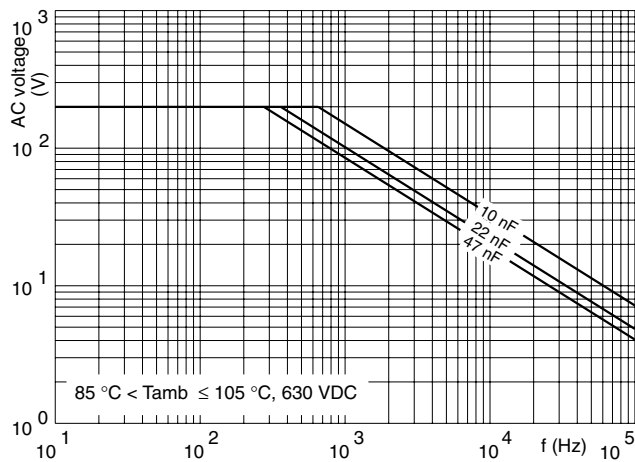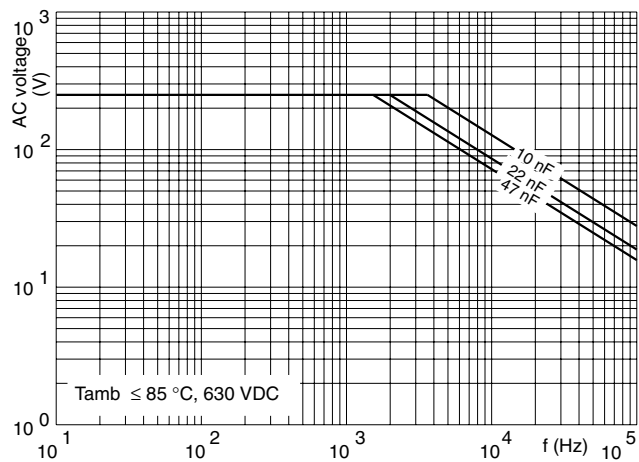

CAPACITANCE

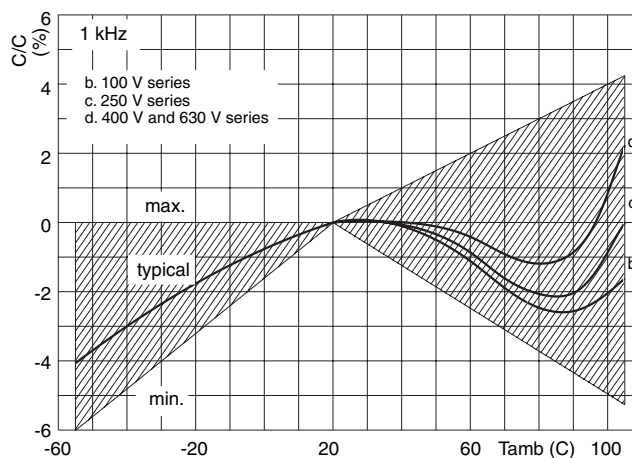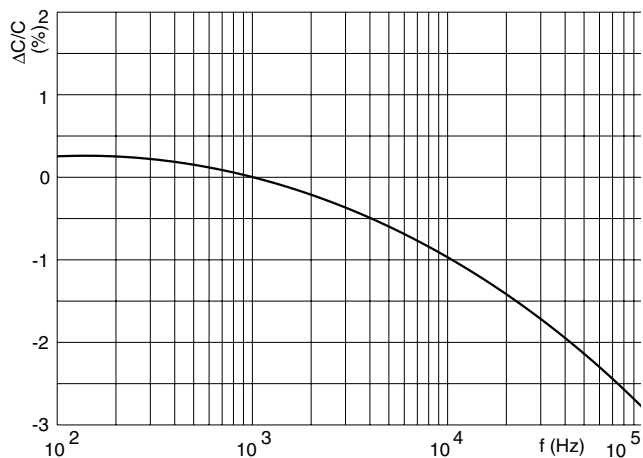

IMPEDANCE

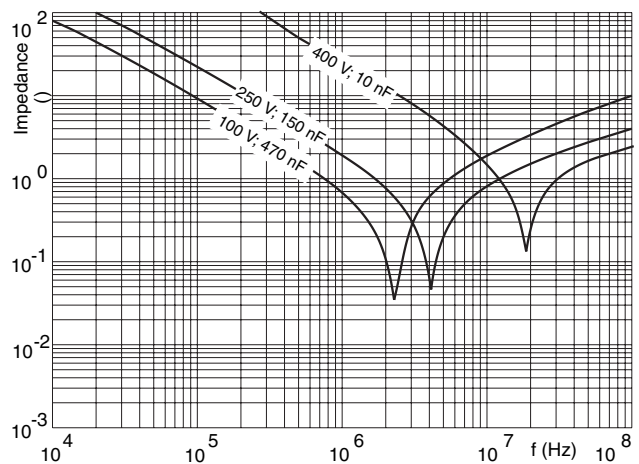



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.