




Accessories










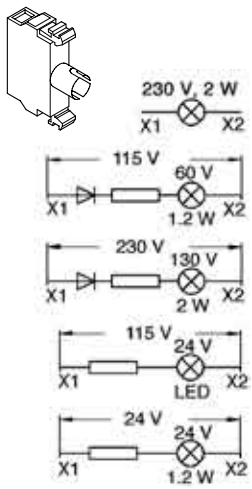



Contact blocks and lamp blocks with holder for front mounting

Max. number of blocks in holder	Included blocks	Catalog No.	Ref. Code
For non-illuminated operators			
3	1 NC	**MCBH-01**	1SFA 611 605 R1110
3	1 NO	**MCBH-10**	1SFA 611 605 R1101
3	2 NC	**MCBH-02**	1SFA 611 605 R1120
3	2 NO	**MCBH-20**	1SFA 611 605 R1102
3	3 NC	**MCBH-03**	1SFA 611 605 R1130
3	3 NO	**MCBH-30**	1SFA 611 605 R1103
3	1 NO + 1 NC	**MCBH-11**	1SFA 611 605 R1111
3	1 NO + 2 NC	**MCBH-12**	1SFA 611 605 R1121
3	2 NO + 1 NC	**MCBH-21**	1SFA 611 605 R1112
For illuminated operators			
3	1 NC + 1 LB	**MCBH-011**	1SFA 611 605 R1210
3	1 NO + 1 LB	**MCBH-101**	1SFA 611 605 R1201
3	1 NO + 1 NC + 1 LB	**MCBH-111**	1SFA 611 605 R1211
3	2 NC + 1 LB	**MCBH-021**	1SFA 611 605 R1220
3	2 NO + 1 LB	**MCBH-201**	1SFA 611 605 R1202

Single contact blocks for front mounting

Included blocks	Catalog No.	Ref. Code
1 NO	**MCB-10**	1SFA 611 610 R1001
1 NC	**MCB-01**	1SFA 611 610 R1010
1 NO with gold plated contacts	**MCB-10G**	1SFA 611 610 R1101
1 NC with gold plated contacts	**MCB-01G**	1SFA 611 610 R1110

Double contact block for front mounting

To be used together with MCBH5-00 when contact blocks in position 4- and 5- are needed.
Also when using MCBH-00 together with selector switch and contact block in positioon 3- is needed

Included blocks	Catalog No.	Ref. Code
2 NO	**MCB-20**	1SFA 611 610 R1002
2 NC	**MCB-02**	1SFA 611 610 R1020
1 NO + 1 NC	**MCB-11**	1SFA 611 610 R1011


Single lamp blocks for front mounting, Ba 9s base


Description	Catalog No.	Ref. Code
For max. 2 W, 230 V AC and DC filament bulb or LED	**MLB-1**	1SFA 611 620 R1001
115 V AC supply voltage. **For 60 V filament bulb max. 1.2 W**	**MLB-2**	1SFA 611 620 R1002
230 V AC supply voltage. **For 130 V filament bulb max. 2 W**	**MLB-3**	1SFA 611 620 R1003
115 V AC and DC supply voltage **For 24 V LED**	**MLB-4**	1SFA 611 620 R1004
24 V AC and DC supply voltage. With resistor. Intended for electronic circuits. The resistor limits the making current and protects against disturbances in the electronic circuit **For 24 V filament bulb**	**MLB-5**	1SFA 611 620 R1005


Holders


Description	Catalog No.	Ref. Code
Holders for front mounting For three blocks	**MCBH-00**	1SFA 611 605 R1100
For five blocks	**MCBH5-00**	1SFA 611 601 R1100


Contact blocks and lamp blocks for rear mounting See Page 8.43





















Contact blocks for rear mounting

Description	Catalog No.	Ref. Code
Contact block		
1NO	**MCB-10B**	1SFA 611 610 R2001
1NC	**MCB-01B**	1SFA 611 610 R2010
Double contact block		
2NO	**MCB-20B**	1SFA 611 610 R2002
2NC	**MCB-02B**	1SFA 611 610 R2020
~~1NO+1NC~~	~~**MCB-11B**~~	~~1SFA 611 610 R2011~~
Contact block with gold plated contacts		
1NO	**MCB-10BG**	1SFA 611 610 R2101
~~1NC~~	~~**MCB-01BG**~~	~~1SFA 611 610 R2110~~

Lamp blocks

For max. 2 W, 230 V AC and DC filament bulb or LED	**MLB-1B**	1SFA 611 620 R2001
115 V AC supply voltage. **For 60 V filament bulb max. 1.2 W**	**MLB-2B**	1SFA 611 620 R2002
230 V AC supply voltage. **For 130 V filament bulb max. 2 W**	**MLB-3B**	1SFA 611 620 R2003

Protective sleeve

Description	Catalog No.	Ref. Code
To make a rear mounted lamp block screen protected. IP20	**5396 0543-1**	5396 0543-1

Earthing terminal

Description	Catalog No.	Ref. Code
For plastic enclosure.	**MA5-2005**	1SFA 611 925 R3005

Spacer

Description	Catalog No.	Ref. Code
1 mm thick. Needed when legend plates are not used in plastic enclosures. Spacer (Packing unit 10 pieces)	**SK 615 516-1**	SK 615 516-1
Spacer for Modular emergency stop pushbutton, page ?? (Packing unit 10 pieces)	**KA1-8045**	1SFA 616 920 R 8045

Blanking plug (22mm)

Description	Catalog No.	Ref. Code
Black plastic	**SK 615 502-B**	SK 615 502-B