

8Z101RS
(ON ENHANCED)台票型図

DESIGNATION

MM50-200B*-E1RE

SERIES PREFIX
シリーズ名

NO. OF CONTACTS
芯数

SOCKET TYPE
ソケットタイプ
B: LATCH TYPE SMT

KEYING TYPE (DETAIL A) 2: TYPE B (1.8V)
キタイプ 1: TYPE A (2.5V)

錫または錫合金(無鉛)
(LEAD FREE) TIN/TIN ALLOY

R: REVERSE
NONE: STANDARD

CONTACT FINISH
接点仕上げ
1: Au (0.1μm MIN) OVER Ni

MODIFY CODE
モディファイコード
E: 6.5mm HEIGHT

DETAIL A
(SCALE 5:1)
(REF. TABLE 1)


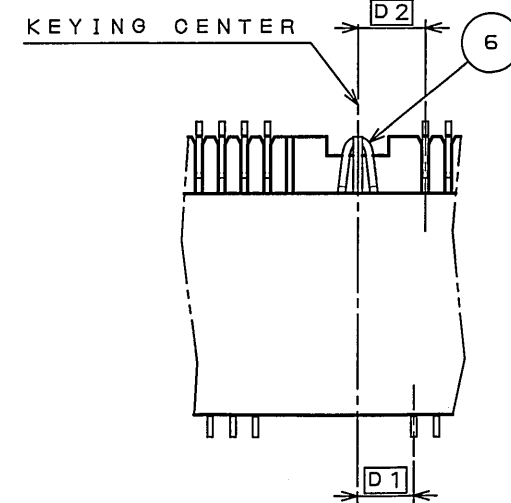


TABLE 2

DISCRIMINATION MARK		
PARTS NAME	VOLTAGE MARK	ABRIDGED PART NUMBER
MM50-200B1-E1RE	2.5V	E1RE
MM50-200B2-E1RE	1.8V	2-E1RE

APPLICABLE P.C.B. DIMENSION (REF.)

適合基板寸法(参考)

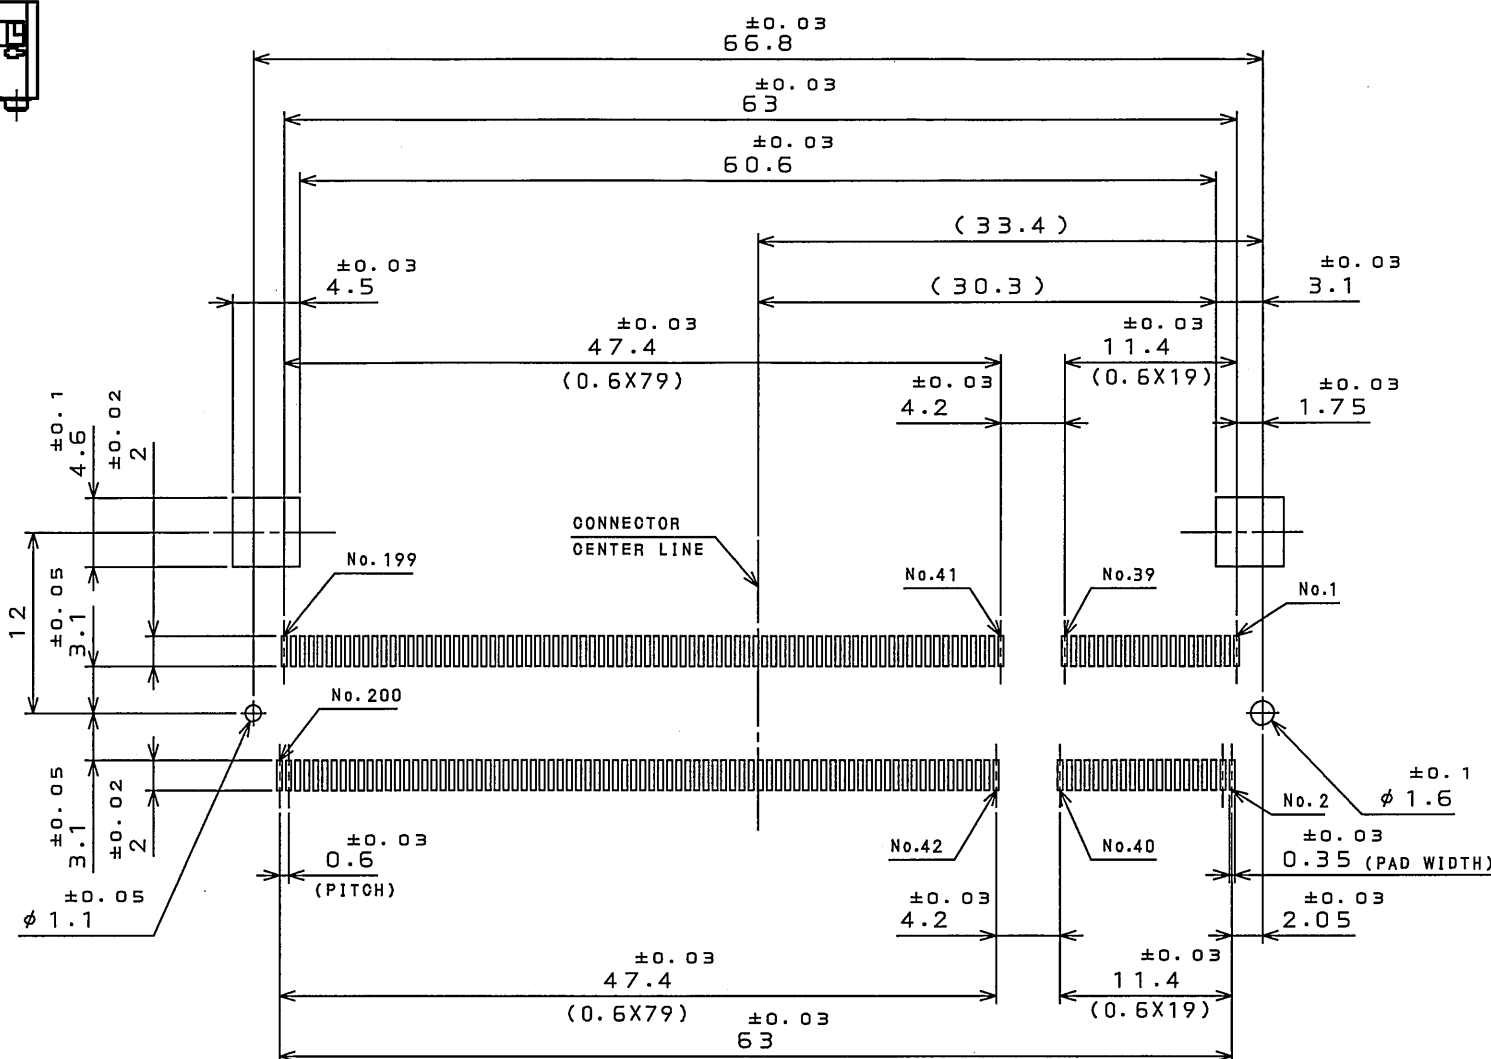

APPLICABLE DIMM (REF.)



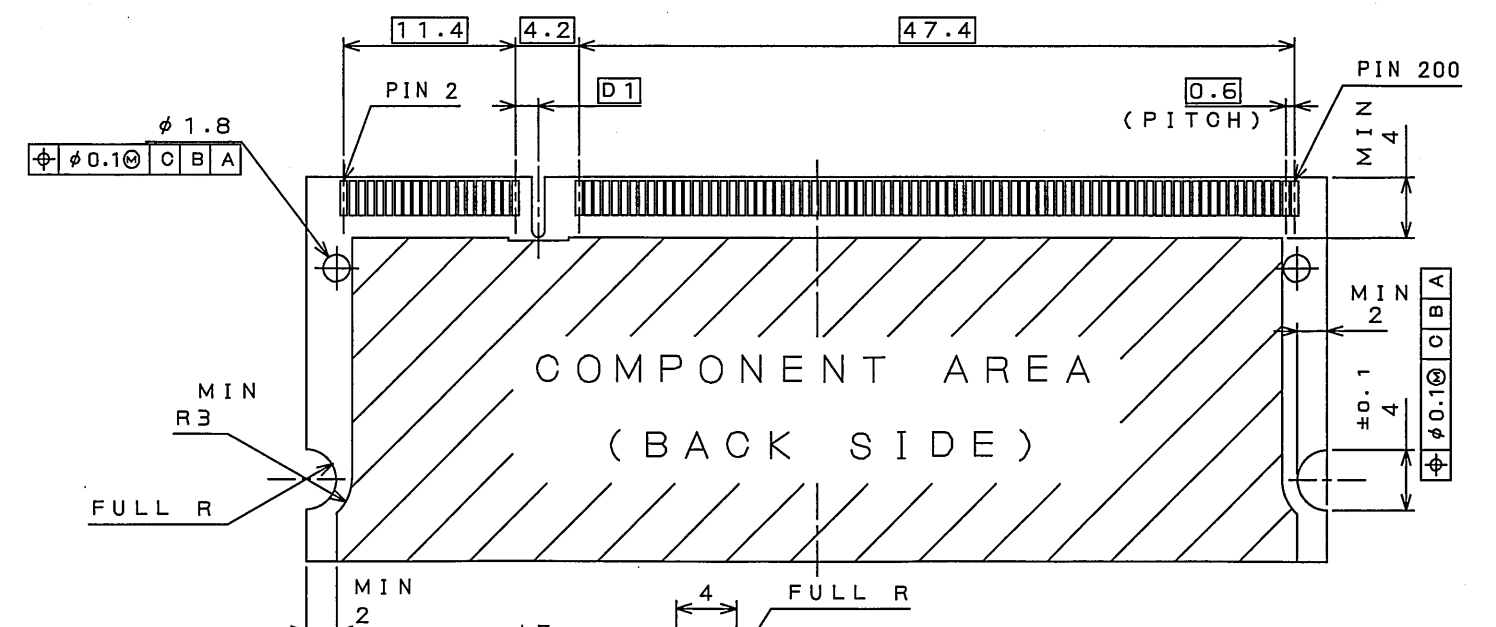


TABLE 1

MECHANICAL KEYING			
POWER SUPPLY	D1	D2	D3
2.5V (TYPE A)	1.5	1.8	18.45
1.8V (TYPE B)	2.4	2.7	17.55

DETAIL B

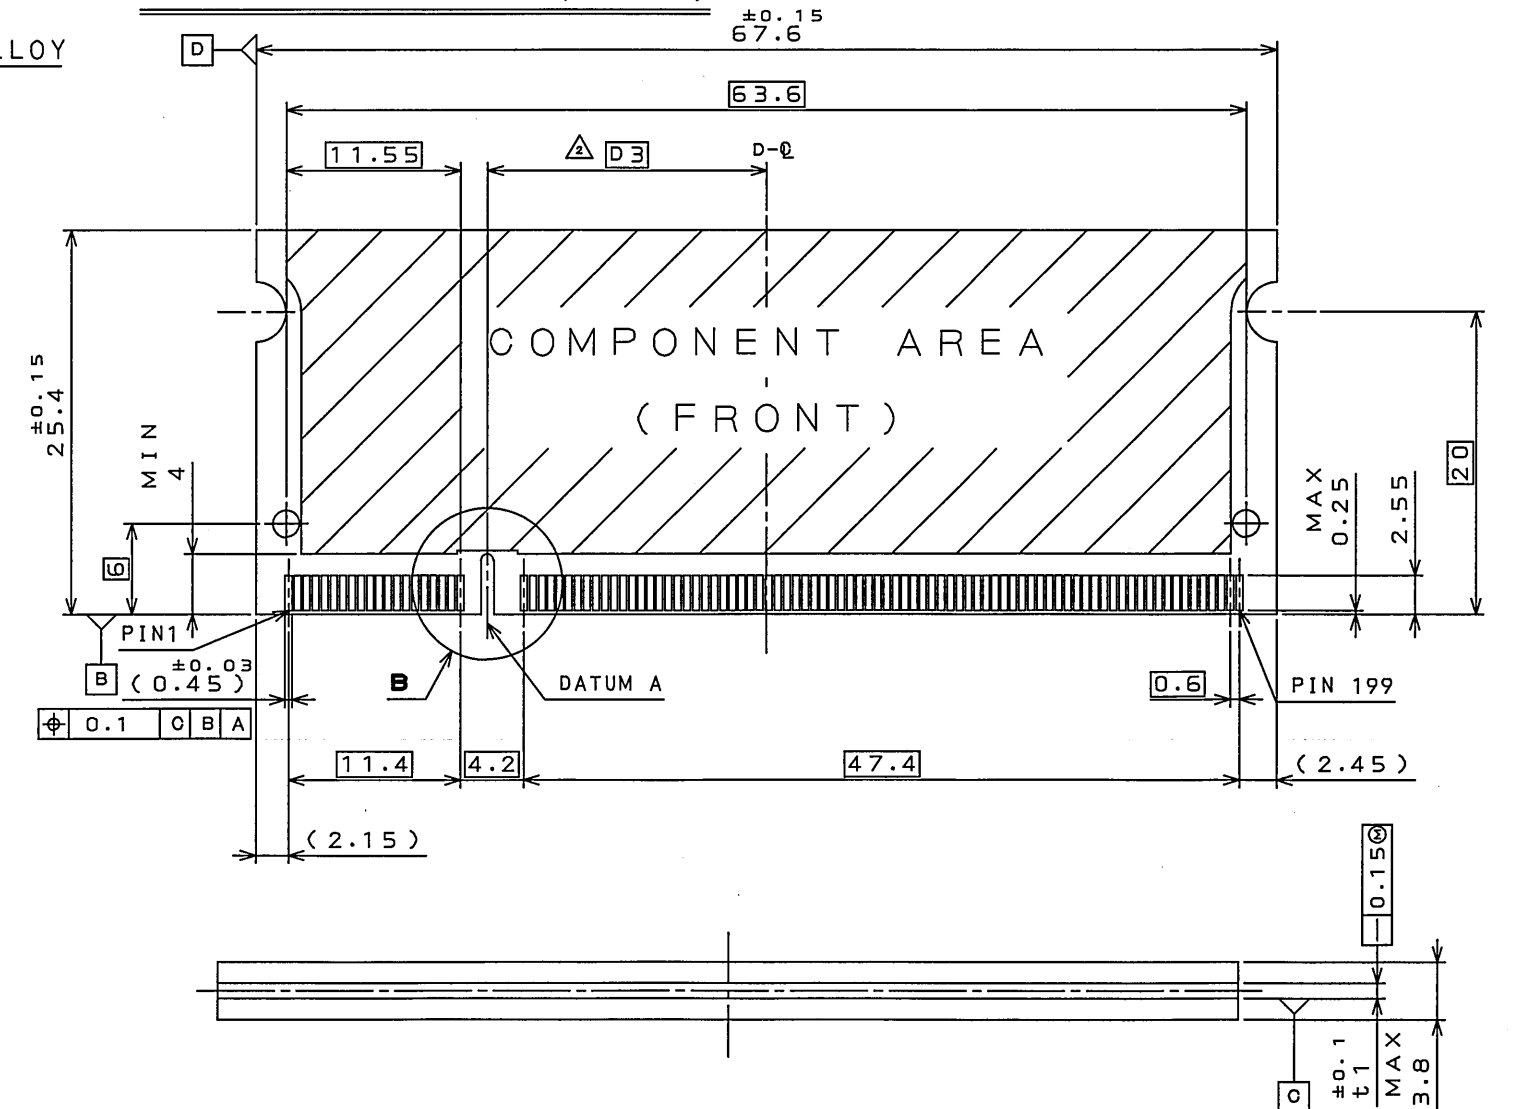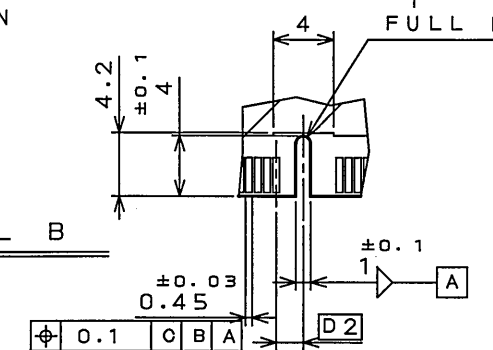

6	KEY	1	STAINLESS		
5	HOLD DOWN 2	1	PHOSPHOR BRONZE	TIN PLATING	
4	HOLD DOWN 1	1	PHOSPHOR BRONZE	TIN PLATING	
3	INSULATOR	1	GLASS FILLED LCP		UL94 V-0 COLOR WHITE
2	BOTTOM SIDE CONTACT	100	PHOSPHOR BRONZE	CONTACT AREA: Au(0.1μm MIN) OVER Ni SOLDERING AREA: GOLD FLASH OVER Ni	
1	TOP SIDE CONTACT	100	PHOSPHOR BRONZE	CONTACT AREA: Au(0.1μm MIN) OVER Ni SOLDERING AREA: GOLD FLASH OVER Ni	
符号 NO.	名 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION)			第1版 (ORIGINAL DATE) 20.May.2004	尺 寸 (SCALE) 2:1	シリーズ (SERIES) MM50
JACS-1655-01				日本航空電子工業株式会社	
一般公差 (GENERAL TOLERANCE)			製図 DR.	名称 (TITLE)	
寸法 (DIMENSION)			担当 CHK.	JAPAN AVIATION ELECTRONICS	
			承認 APPD.	INDUSTRY, LTD.	
			承認 APPD.	図面番号 (DRAWING NO.)	
			質量 (MASS)		
. ±0.8			X° ±		版 (REV.)
.X ±0.4			X°X' ±		
.XX ±0.1					
.XXX ±					
			</		

LEAD FREE この製品は鉛フリー品です

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2004, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.