




MicroPower Direct

Go Direct - **MicroPower Direct** - For Product, Performance and Price

400W AC-DC ACTIVE PFC MEDICAL POWER SUPPLY MPA400M SINGLE OUTPUT SERIES

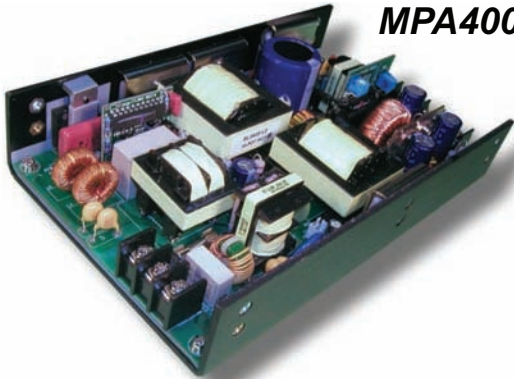

U - Chassis Type: 8 x 5 x 1.6"
Enclosed with built-in fan Type: 9 x 5 x 1.6"

FEATURES:

- Medical Safety Approvals
- Optional N+1 Forced Active Current Sharing
- Power Factor Corrected to EN61000-3-2 class D
- Providing Peak Power 700W within 500uS duty duration
- U-Chassis & Enclosed with built-in fan Mechanical Options
- 1U height size and High power density: 6.25 watts/cu inches
- Current Monitoring and Remote Voltage adjustment (Margin)



PRODUCT SPECIFICATIONS:

Input Voltage: 90-264 Vac full range, 47~63 Hz.

Input Current: 6.35A at 90VAC full load.

Inrush Current: 35A Max @ 230 Vac with full load and cold start.

PFC: Active power factor correction meet EN61000-3-2 class D.

Fan Drive: 12VDC/400mA is available to drive an external fan.

Transient Response: Returns to within 1% in less than 2.5 mS for a 50% load change and the peak transient does not exceed 5%.

Overshoot: Turn-on/off not exceed 5% over nominal voltage.

Efficiency: 82% minimum (Measuring at 230V and full load).

Turn On Delay: 1 second maximum at 120 VAC.

Hold Up Time: 20 mS min. at 80% of full load.

Adjustability: Output user adjustable $\pm 5\%$ minimum.

Remote Sense: Designated "RS+" and "RS-" on the CN3.

(Not available for current sharing models)

Remote On-Off: Designated as "RSW" on the CN3, requires a low signal to inhibit output.

Power Supply On: Green LED designated as "LED 1" on the PCB.

LED display: Bi-color "LED1" emit green light on operating. Any protection occurred or RSW applied low signal will emit orange.

Power Good: Designated as "PG" on the CN3 will go high 100-500 mS after regulation and goes low 1mS before loss of regulation.

Current Sharing: Designated as "CSH" on the CN3, optional single wired for forced current sharing function and parallel up to 4 units within 10% accuracy at full load.

Current Monitor: Designated as "CMN" on the CN3 for current sense for a 0.5V to 3 VDC to represent 0% to 100% output current.

Margin: Designated as "MGN" on the CN3 providing 50% of output voltage remote adjustment by applying 0.4 ~ 5V signal on "MGN".

AC Fail (optional): Designated as "ACF" on the CN3 to monitor the input voltage, when input goes under 80 +/- 5VAC the signal will go low (0V) and then go high (+5V) once reappears over 86 Vac.

(Input voltage protection must be disabled when AC Fail is enable.)

Input Circuit (primary): Two protected fuse inserted, shall be blown only by an internal power fault.

Input Voltage Protection: Power shut down under 80 ± 5 Vac,

and recovered over 86 Vac. (Disabled unless AC Fail is requested)

Over-Power Protection: C.C. mode 110-140% and auto-recovery.

Over-Voltage Protection: Latching down will occur when output voltage exceed 130% and recycle AC input to reset.

Short Circuit Protection: Trip without damage and auto-recovery.

Over Temperature Protection: Protected in the event of excessive operating ambient 85°C, with automatic recovery.

Switching Frequency: 30 kHz fixed frequency.

Operating Temperature: 0 to 70°C ambient, de-rating at 2.5% per degree from 50°C to 70°C.

Storage Temperature: -20 to 85°C.

Operating Humidity: 5% to 90% RH, Non-condensing.

Storage Humidity: 5% to 95% RH, Non-condensing.

Vibration: Frequency 5 to 50 Hz, acceleration +/- 7.35 M/(SxS) on X,Y and Z Axis.

Emissions: FCC Part 15, CISPR 22 class B, Conducted.

Safety Regulation: Approved to UL60950-1/ 60601-1, CSA C22.2 No. 60950-1-03/ 601.1-M90, TUV EN60950-1/ 60601-1, CE Mark (LVD) EN61204-3/ 60601-1-2/ 61000-3-2,3 & IEC61000-4 Series Regulations and CB.

Leakage Current: 300uA

HI-POT Test: 1500 Vac between input line and chassis (2mA DC cut off current); 4000 Vac between primary and secondary windings; Primary to core 1500 VAC. All for 3 sec.

Grounding Test: Apply 40 A from ground pin to the earthed connection point. Maximum allowable resistance is 0.1ohm.

Warranty: 2 years.

MTBF: 100000 Hrs (according to MIL-HBK-217F) at 30°.

Cooling: External forced air requires achieving full ratings.

Burn in: 45 +/- 5°C for 1 hour @ 230 Vac with full load.

Enclosure: U-Chassis type - 8(L) x 5(W) x 1.6(H) inches. Enclosed type - 9(L) x 5(W) x 1.6(H) inches.

Weight: U-Chassis Type - 1.3KG; Enclosed Type - 1.6KG;

MicroPower Direct

www.micropowerdirect.com


OUTPUT VOLTAGE / CURRENT RATING CHART: Measured at output power connector.

Model	Output Range	Preset Voltage	Max. Output current		Total Regulation	Ripple & Noise
			Convection	22.95CFM		
MPA400Mxy-03z	2 – 3.3V	3.3V	45A	60A	+/- 1%	+/-1%
MPA400Mxy-05z	5 - 6V	5V	45A	60A	+/- 1%	+/-1%
MPA400Mxy-12z	12 - 15V	12V	20.84A	33.34A	+/- 1%	+/-1%
MPA400Mxy-18z	16 - 21V	18V	15.64A	25A	+/- 1%	+/-1%
MPA400Mxy-24z	22 - 30V	24V	11.37A	18.19A	+/- 1%	+/-1%
MPA400Mxy-36z	31 – 41V	36V	8.07A	12.9A	+/- 1%	+/-1%
MPA400Mxy-48z	42 - 58V	48V	5.96A	9.53A	+/- 1%	+/-1%


- * **MPA400Mxy-00z** x = E (Enclosed Type) or U (U-Chassis Type); y = Blank (Standard) or I (Forced current sharing option, Oring Diode); z = Blank (terminal strips), M (Molex Connectors) or I (IEC Input Connector, Enclosed unit only).
- * Max power 400W continuous output with min. 22.95CFM forced air cooling or built-in fan. Convection cooled rating as above chart.
- * All output ranges are covered in agency certifications and preset output voltage for each model as above listings.
- * Providing peak power to 700W within 500uS for all models, longer duty duration need contact manufacture.
- * 1% minimum load is required to maintain the ripple and regulation.
- * Output is fully isolated.
- * Cover is optional for U-Chassis enclosure.

OUTLINE DRAWING:

Overall Size for U-Chassis Type: 8(L) x 5(W) x 1.6(H)inches; Weight: Maximum weight is 1.3kg

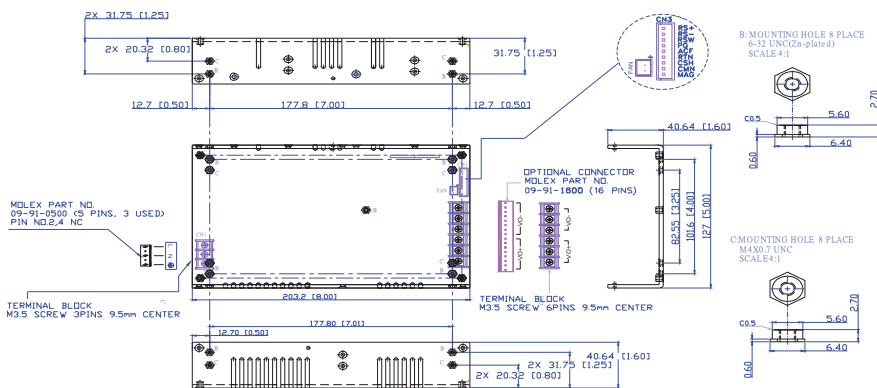

Overall Size for Enclosed Type: 9(L) x 5(W) x 1.6(H)inches; Weight: Maximum weight is 1.6kg

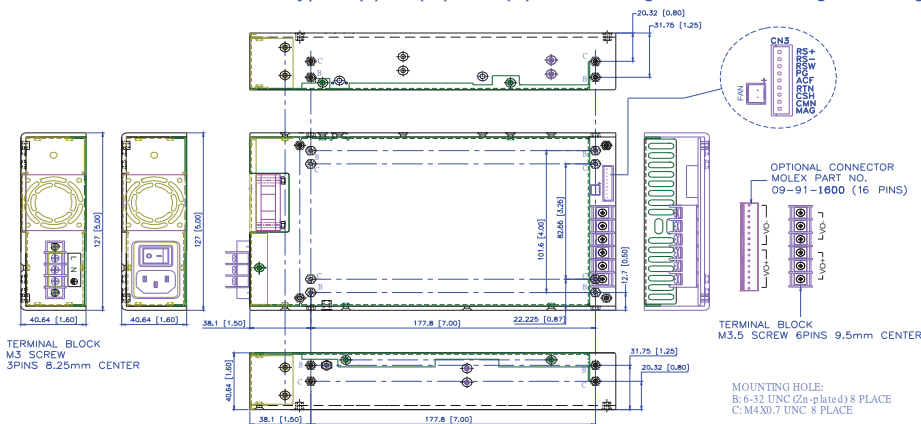

I/O Connector pin assignment:

Input Connector(CN1):

U-Chassis Type – mating Molex Part No. 09-91-0700 equivalent (7 pin, 5 used), or Howder Terminal block Part No. HD-121-3P.
Enclosed type – IEC320 or equivalent Snap-in mounting type or DINKLE Terminal block Part No. DT-35-A02W-03 (3 pin)

Output Connector (CN2): Mating Molex 16 pins (09-91-1600), or Howder (HD-121-6P) M3.5, 8 pins terminal block, 9.5MM Center.

Output Pin Assignment: (See Table Below)

Logic signal connectors (CN3):

Mating JST XHP-8 or equivalent (CHYAO SHIUNN JS-2001-08) Mating Pins: JST SXH-002T-P0.6 for AWG 30 to 26.

Fan driver connector (FAN): 12 VDC / 400 mA is available to drive an external fan. Mating connector is a JST XHP-2 or Molex P/N 48-151-0210 (2 pins 0.98 pitch). Mating Pins: JST SXH-001T-P0.62T or Molex 48150 .

Mounting Inserts: 6-32, M4 4 Places individually with maximum penetration 0.15" on bottom side and 0.25" on both side.

	Molex	Howder
VO+	(Pins 1-8)	(Pins 1-3)
VO-	(Pins 9-16)	(Pins 4-6)



MicroPower Direct
www.micropowereirect.com

292 Page Street, Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • EMAIL: sales@micropowereirect.com