


Specification for monolithic crystal filter:


MQF 10.7-3000/13

1. General

1.1. Package:

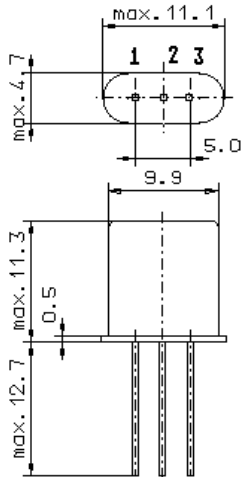

GH3

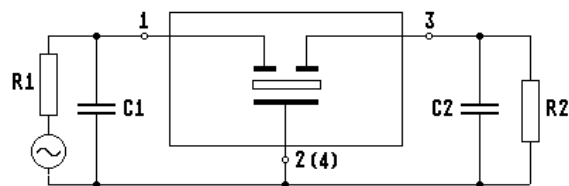

- | | |
|-----------------------------------|------------------|
| 1.2. Type name: | MQF 10.7-3000/13 |
| 1.3. Number of poles: | 2 |
| 1.4. Operating temperature range: | -20°C to +70°C |
| 1.5. Storage temperature range: | -45°C to +85°C |

2. Electric values

- | | |
|---------------------------------------|----------|
| 2.1. Nominal centre frequency f_0 : | 10.7 MHz |
|---------------------------------------|----------|

2.2. Pass band

- | | |
|---|-----------------------|
| 2.2.1. Bandwidth between 3 dB - frequencies: | $\geq f_0 \pm 15$ kHz |
| 2.2.2. Ripple (at $f_0 \pm 10$ kHz): | ≤ 1.0 dB |
| 2.2.3. Insertion loss:
(measured on smallest attenuation in pass band) | ≤ 1.5 dB |

2.3. Stop band

- | | |
|---|--------------|
| 2.3.1. $f_0 \pm 75$ kHz | ≥ 25 dB |
| 2.3.2. $f_0 \pm 200$ kHz..... ± 500 kHz | ≥ 40 dB |
| 2.3.3. Spurious responses: | ≥ 4 dB |

- | | |
|--|--------------------------|
| 2.4. Terminating impedance (input and output): | $5000 \Omega // -0.5$ pF |
|--|--------------------------|

- | | |
|-------------|---|
| 3. Marking: | manufacturer, date code
10.7-3000/13 |
|-------------|---|

- | | |
|----------------------------|---|
| 4. Environment conditions: | Corresponding to Vectron standard CF001 |
|----------------------------|---|

Edited by: _____ date: _____ name: _____