
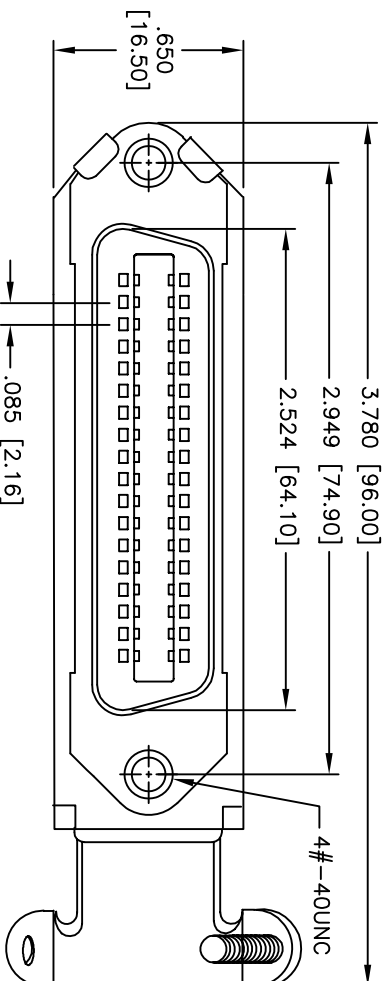


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/30/10	

APPROVED: _____

DATE: _____ TITLE: _____

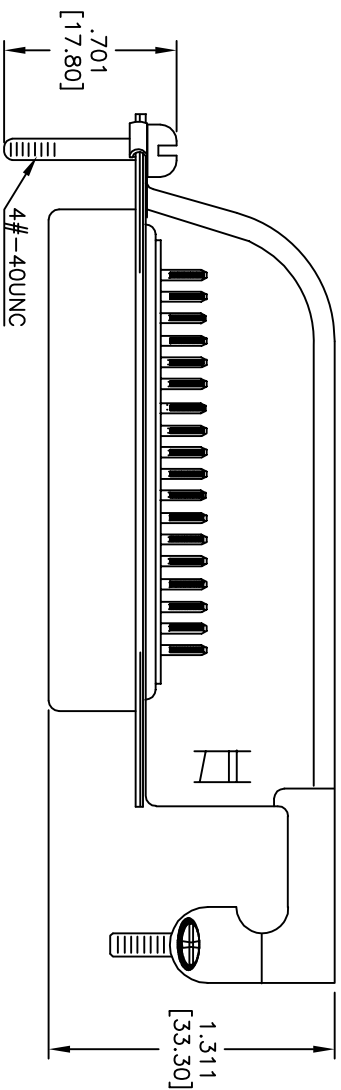

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Nickel plated

Plating:

30u" Gold over Nickel underplate on mating area,

Tin over Copper underplate on tails

Electrical:

Current rating: 5 Amp max

Contact resistance: 25 mohms max

Insulation resistance: 1,000 Mohms min @ 500V

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

MINIATURE RIBBON SOCKET

SOLDER TERMINALS, 30u" SEL GOLD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØXX	± .10	.X	± .10	ØXX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DR		8/30/10				
CHECKED							
APPROVED							
				SIZE	PART NO.	REV.	
				X	MR50-SA-34-HDRA-30	-	
REF:				SCALE:	NTS	SHEET	1 OF 1