



Microchip MRF24W Getting Started Guide for MRF24WB0MA/B, MRF24WG0MA/B for MLA v5

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, KEELoQ, KEELoQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC³² logo, rPIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MTP, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

Analog-for-the-Digital Age, Application Maestro, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICKit, PICtail, REAL ICE, rLAB, Select Mode, SQI, Serial Quad I/O, Total Endurance, TSHARC, UniWinDriver, WiperLock, ZENA and Z-Scale are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

GestIC and ULPP are registered trademarks of Microchip Technology Germany II GmbH & Co. & KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2013, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

ISBN: 978-1-62076-981-2

**QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO/TS 16949 =**

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

**Object of Declaration: Microchip MRF24W Getting Started Guide for Microchip
MRF24WBG0MA/B, MRF24WG0MA/B for MLA v5**

EU Declaration of Conformity

This declaration of conformity is issued by the manufacturer.

The development/evaluation tool is designed to be used for research and development in a laboratory environment. This development/evaluation tool is not a Finished Appliance, nor is it intended for incorporation into Finished Appliances that are made commercially available as single functional units to end users under EU EMC Directive 2004/108/EC and as supported by the European Commission's Guide for the EMC Directive 2004/108/EC (8th February 2010).

This development/evaluation tool complies with EU RoHS2 Directive 2011/65/EU.

For information regarding the exclusive, limited warranties applicable to Microchip products, please see Microchip's standard terms and conditions of sale, which are printed on our sales documentation and available at www.microchip.com.

Signed for and on behalf of Microchip Technology Inc. at Chandler, Arizona, USA



Derek Carlson
VP Development Tools

02-May-12
Date

NOTES:



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Table of Contents

Preface	7
Chapter 1. Getting Started with MRF24WB0MA/B or MRF24WG0MA/B	13
1.1 Overview	13
1.2 Scope	13
1.3 Hardware	13
1.4 Software	14
1.5 References	14
1.6 Common Terms and Definitions	15
1.7 Local Network Topologies	16
Chapter 2. Hardware Setup and Configuration	21
2.1 PICtail Setup	21
2.2 PICDEM.net 2	21
2.3 Explorer 16 and PIC32 Starter Kit	22
2.4 Connecting the Development Board	22
2.5 Wireless Access Point (AP) Setup	23
2.6 Serial Monitor Setup	27
Chapter 3. Software Setup and Configuration	29
3.1 Software Items to Install	29
3.2 Installing the Microchip MPLAB® X IDE	29
3.3 Installing the Microchip MPLAB® XC/C18 Compiler	29
3.4 Installing the Microchip TCP/IP Stack with MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® Driver	30
3.5 Installing Interim Code Releases	30
Chapter 4. Sample Application Demonstrations	31
4.1 Basic Demonstration Applications	31
4.2 Walkthrough and Instructions on Running the Demonstration	32
4.3 Opening Existing Projects	33
4.4 Hardware Configuration Options	34
4.5 Compile-Time Configuration Options	35
4.6 Compiling and Downloading Images	47
4.7 Running TCP/IP – Demo App	51
4.8 Running the TCPIP – WiFi Console	72
4.9 Running the TCPIP – WiFi EZConfig	78
Chapter 5. Microchip Development Board Specifics	91
5.1 PICDEM.NET 2 Usage	91
5.2 Explorer 16 Usage	91
5.3 Erasing EEPROM	92

Appendix A. Appendix	93
A.1 Microchip Hardware	93
A.2 Microchip Software	93
A.3 MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® Resources	93
A.4 Tools	93
Worldwide Sales and Service	96



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXA”, where “XXXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE on-line help. Select the Help menu, and then Topics to open a list of available on-line help files.

INTRODUCTION

This preface contains general information that will be useful to know before using the MRF24WB0MA/B and/or MRF24WG0MA/B. Topics discussed in this preface include:

- [Document Layout](#)
- [Conventions Used in this Guide](#)
- [Warranty Registration](#)
- [Recommended Reading](#)
- [The Microchip Web Site](#)
- [Development Systems Customer Change Notification Service](#)
- [Customer Support](#)
- [Document Revision History](#)

DOCUMENT LAYOUT

This user's guide describes how to use the Microchip MRF24W Getting Started Guide for MRF24WB0MA/B, MRF24WG0MA/B for MLA v5. The document is organized as follows:

- **Chapter 1. “Getting Started with MRF24WB0MA/B or MRF24WG0MA/B”** – This chapter introduces the various wireless network topologies, terminologies, and a brief description of the hardware and software needed.
- **Chapter 2. “Hardware Setup and Configuration”** – This chapter provides information on how to set up the hardware to be used in the development environment.
- **Chapter 3. “Software Setup and Configuration”** – This chapter describes the software to be used in conjunction with the hardware.
- **Chapter 4. “Sample Application Demonstrations”** – This chapter describes the various applications released in the TCP/IP stack MLA release.

- **Chapter 5. “Microchip Development Board Specifics”** – This chapter provides the pin descriptions that interface the hardware platform to the MRF24W.
- **Appendix A** – This appendix provides the web links to access the hardware or software as described in this user guide.

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly braces and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

WARRANTY REGISTRATION

Please complete the enclosed Warranty Registration Card and mail it promptly. Sending in the Warranty Registration Card entitles users to receive new product updates. Interim software releases are available at the Microchip web site.

RECOMMENDED READING

This user's guide describes how to use MRF24WB0MA/B and/or MRF24WG0MA/B. The device-specific data sheets contain current information on programming the specific microcontroller or digital signal controller devices. Other useful documents are listed below. The following Microchip documents are available and recommended as supplemental reference resources:

MRF24WB0MA/MRF24WB0MB Data Sheet (DS70632)

MRF24WG0MA/MB Data Sheet (DS70686)

To obtain any of these documents, visit Microchip web site at www.microchip.com.

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

DEVELOPMENT SYSTEMS CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com, click on Customer Change Notification and follow the registration instructions.

The Development Systems product group categories are:

- **Compilers** – The latest information on Microchip C compilers and other language tools. These include the MPLAB[®] C compiler; MPASM[™] and MPLAB 16-bit assemblers; MPLINK[™] and MPLAB 16-bit object linkers; and MPLIB[™] and MPLAB 16-bit object librarians.
- **Emulators** – The latest information on the Microchip MPLAB REAL ICE[™] in-circuit emulator.
- **In-Circuit Debuggers** – The latest information on the Microchip in-circuit debugger, MPLAB ICD 3.
- **MPLAB IDE** – The latest information on Microchip MPLAB IDE, the Windows[®] Integrated Development Environment for development systems tools. This list is focused on the MPLAB IDE, MPLAB SIM simulator, MPLAB IDE Project Manager and general editing and debugging features.
- **Programmers** – The latest information on Microchip programmers. These include the MPLAB PM3 device programmer and the PICkit[™] 3 development programmers.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://support.microchip.com>.

DOCUMENT REVISION HISTORY

Revision A (January 2013)

This is the initial released version of the document



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Chapter 1. Getting Started with MRF24WB0MA/B or MRF24WG0MA/B

1.1 OVERVIEW

MRF24WB0MA/B and MRF24WG0MA/B Wi-Fi® PICtail™ are the 802.11 module based boards for evaluating 802.11b/g wireless connectivity on the Microchip Technology's processing platform. MRF24WB0MA/B and MRF24WG0MA/B Wi-Fi® PICtail™ are the expansion boards that are compatible with the Explorer 16 and PICDEM™.NET 2 development boards.

- MRF24WB0MA/B supports only 802.11b (1 Mbps, 2 Mbps)
- MRF24WG0MA/B supports both 802.11b and 802.11g

802.11b, ratified in 1999 is an extension of 802.11 that uses the same 2.4 GHz frequency band, and supports two additional transmission rates, 5.5 Mbps and 11 Mbps along with existing 1 Mbps and 2 Mbps.

802.11g, ratified in 2003 is backward compatible with 802.11b, and supports the additional transmission rates of 6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps and 54 Mbps.

1.2 SCOPE

The Getting Started Guide covers these topics:

- MLA v5 based releases
- MPLAB® X IDE

1.3 HARDWARE

The following are required for developing or evaluating of the Microchip MRF24WB0MA/B and MRF24WG0MA/B Wi-Fi® module 802.11b/g solution:

- MRF24WB0MA/MB or MRF24WG0MA/B Wi-Fi® PICtail™
- One of the following Microchip hardware development platforms:
 - Explorer 16 Development Board (PIC24 or PIC32 depending on the personality module)
 - PICDEM.Net2 (PIC18)
 - PIC32 Starter Kit and I/O Expansion Board
- One of the following Microchip development tools:
 - MPLAB Real ICE
 - MPLAB ICD
 - PICKit™ 3 programmer with AC164110 RJ11 to ICSP adapter
- Power supply (different hardware configurations have different power requirements. Use the AC power adapter that comes along with the kit)

- 802.11 access point (AP) (b, b/g, or b/g/n) required for using the development board in Infrastructure BSS mode
 - Linksys WRT54G or WRT54G2 is recommended, and it is used as a reference in this document. If other types of APs are used, the approach remains similar and user must refer to the APs operating manual.

1.4 SOFTWARE

This user's guide consists of sections on installing the Microchip MPLAB X IDE, the Microchip MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® SDK and TCP/IP stack, and the necessary changes to configure the demonstration software for networks with different characteristics apart from the default settings. Refer to [Appendix A](#), for direct links to the specific Microchip software you may require for your project. The latest Microchip documentation is available on the Microchip web site, and takes precedence over software bundles on the installation CD. The latest MRF24WB0MA/B and MRF24WG0MA/B Wi-Fi® documentation is available on the Microchip Wi-Fi® support web site (<http://www.microchip.com/pagehandler/en-us/technology/wifi>), and is the most accurate.

This user's guide documents how to configure the wireless network by hard coding the network parameters into the software, then compiling, and storing this information on the Microchip MCU. The software uses the C function calls to modify the values in variables used to keep the configurations. Customer application code can therefore create a user interface that allows scanning for networks and then configuring based on the end users selection. As an example of using the variables, the included demonstration projects have a number of source files to allow run-time configuration of the networks (for example, select Ad hoc or Infrastructure network type, change the SSID, change the security methods and keys, and so on).

The required software installation to build the project are:

- Microchip MPLAB® XC compiler
- Microchip MPLAB C18 compiler (PICDEM.Net 2 and PIC18)
- Microchip MPLAB X IDE

Refer to [Appendix A](#), for download information.

1.5 REFERENCES

For more information, refer to the following:

- Microchip TCP/IP Stack Help

The help file comes with the TCP/IP source code releases.

1.6 COMMON TERMS AND DEFINITIONS

TABLE 1-1: COMMON TERMS AND DEFINITIONS


Parameter	Description
STA	Station (local station) is a device on the network, typically refer to a wireless device. This can be a laptop, PC, or the Microchip development board with MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICTail™.
LAN	Local area network (LAN) is a collection of computers communicating to each other. LAN consists of two devices communicating through a wireless access point (AP) or router (see Figure 1-1). Local networks can communicate to each other, or, with a WAN (internet) connection, and they can communicate to other networks over the internet.
AP	Wireless access point (AP) is a device that creates a wireless network that multiple wireless devices can connect to. When connected to a wired network, wired and wireless devices can communicate with each other. Typically, most APs and routers come as a single unit, making the connection between wired, wireless and internet seamless.
Router	Router is a network device that directs and forwards traffic. Generally, a router and an AP are combined together, so that wired and wireless devices can communicate to each other.
DHCP	Dynamic host configuration protocol (DHCP) is an application layer protocol that manages the IP network. This reduces the amount of manual intervention required when putting a new device on the network. To connect to a network, you are provided with an IP address by the DHCP server.
OUI	Organizationally unique identifier is a 24-bit number (3 bytes) that composes the first three bytes (octets) of the six byte MAC address. The OUI is managed by the IEEE. The OUI that identifies MRF24WB0MA/B or MRF24WG0MA/B is 00:1E:C0. With each OUI, you are guaranteed 224 unique combinations that can be used for device identification.
MAC address	Media access control address is a unique identifier to each device on a network. For a given OUI, there can be 224 uniquely programmed MAC addresses.
BSS	Basic service set is the basic building block of a wireless LAN. This usually consists of an AP, with one or more wireless stations. This is commonly referred to as Infrastructure mode.
IBSS	Independent basic service set is a network with no controlling AP. The first device to start the network will broadcast the SSID, and other local stations can join. This is commonly referred to as Ad hoc mode.
SSID	Service set identifier is a name for the wireless network.
WEP	Wired equivalent privacy is an encryption mechanism for wireless networks. Most APs implement two different flavors of WEP, 64-bit WEP (WEP-40) and 128-bit WEP (WEP-104). Several failings have been identified in WEP, resulting in easily hackable and insecure networks. WEP is no longer recommended for use, except as required to interface with legacy equipment that cannot support WPA/WPA2.
WPA	WiFi protected access is the implementation of the IEEE 802.11i specification. It is considered a secure alternative to WEP.
WAN	Wide area network is a network that connects other networks (LANs) together. The most famous WAN is the internet.
MCU	Microcontroller unit. In the case of this demonstration, this will either be PIC18 (PICDEM.net 2), PIC24 (Explorer 16), or PIC32 (Explorer 16).

1.7 LOCAL NETWORK TOPOLOGIES

1.7.1 Infrastructure Basic Service Set (BSS)

A common example of a local network operating in Infrastructure mode is shown in [Figure 1-1](#).

FIGURE 1-1: INFRASTRUCTURE BSS NETWORK

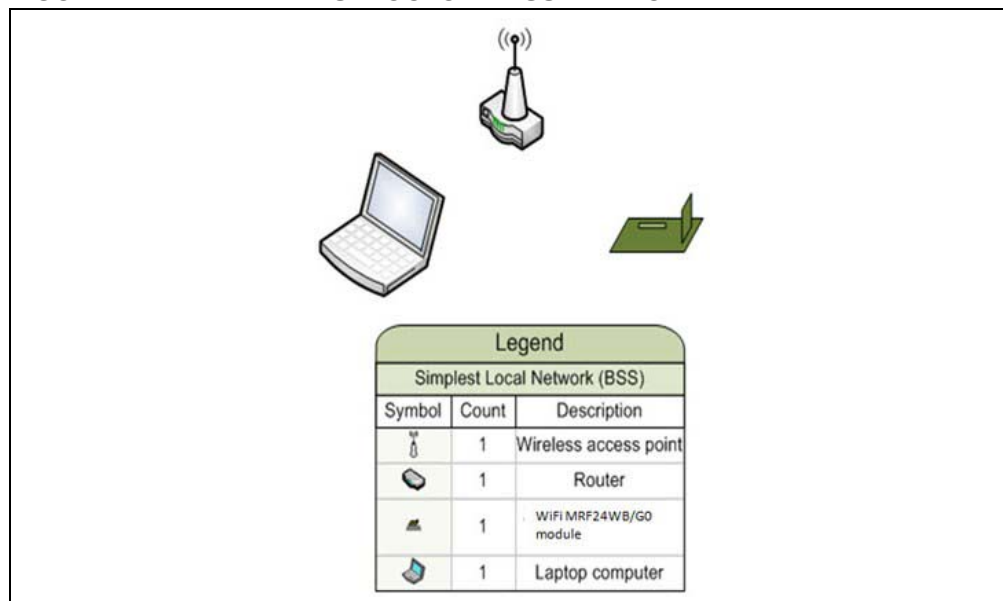


[Figure 1-1](#) illustrates a laptop computer and the Microchip development board with MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ communicating with each other through a wireless AP and router. This network can gain access to the internet if the router is connected to a WAN.

1.7.2 Independent BSS (IBSS) or Ad hoc Network

Another example of a common local network is the ad hoc (IBSS) network, see [Figure 1-2](#).

FIGURE 1-2: IBSS OR AD HOC NETWORK

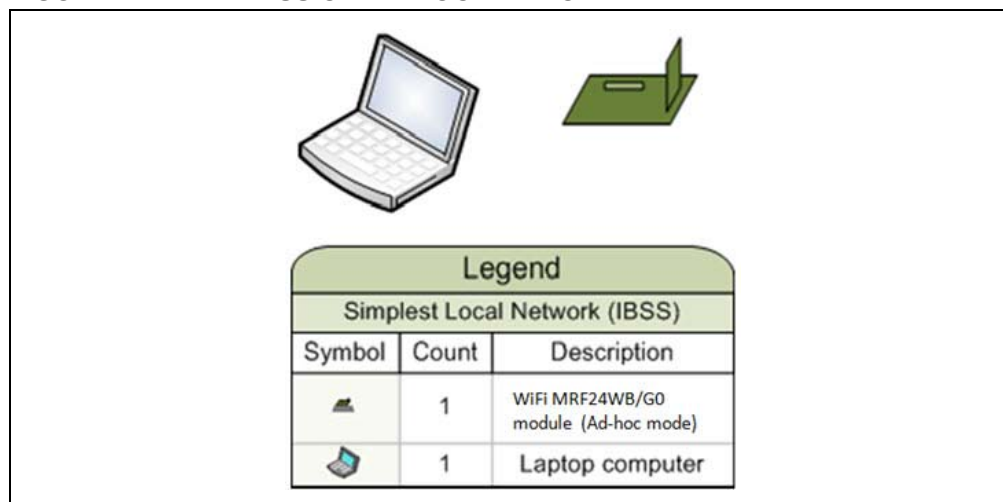


The Microchip development board with MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ is the first station to broadcast when creating the network, see [Figure 1-2](#). In this case, join the laptop to the ad hoc network after the development board has gone through the steps of setting up the ad hoc network. The security mode supported is Open mode and WEP security. According to specifications, ad hoc network only supports 802.11b rates of 1 Mbps, 2 Mbps, 5.5 Mbps and 11 Mbps. Most Android devices do not support ad hoc network.

1.7.3 WiFi Direct (Peer-to-Peer (P2P)) Network

Figure 1-3 provides a typical example of local network, WiFi Direct (peer-to-peer (P2P)) network. WiFi Direct does not support 802.11b, therefore only MRF24WG0MA/B Wi-Fi® PICTail™ can support such network types.

FIGURE 1-3: WIFI DIRECT (PEER-TO-PEER P2P) NETWORK

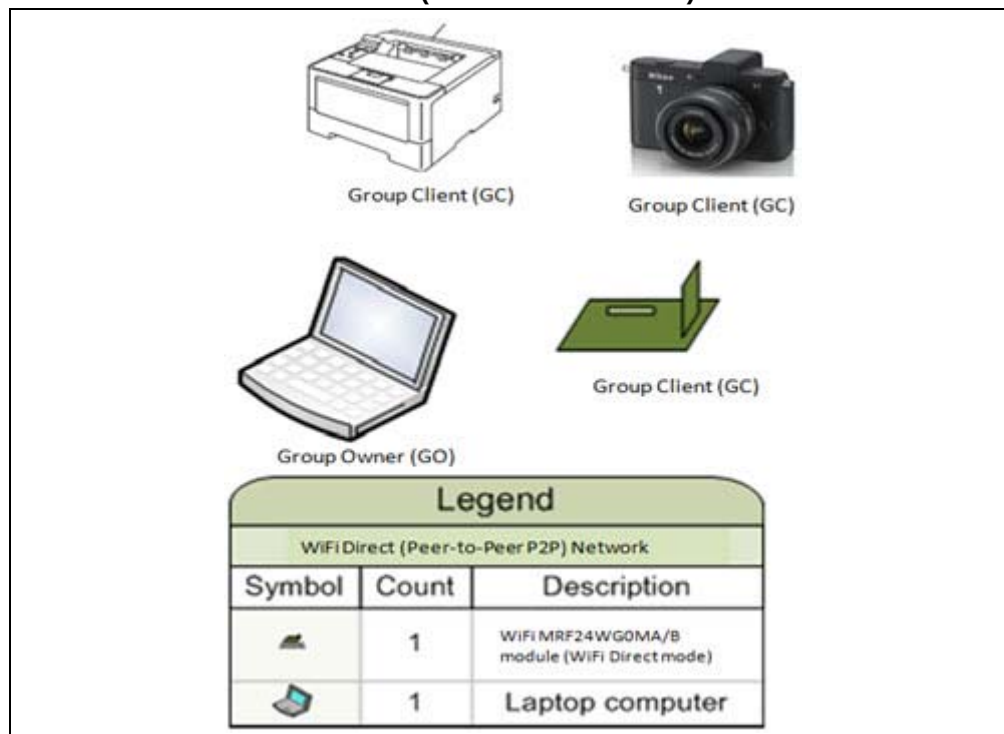


WiFi Direct allows you to configure a secured wireless network between several devices, such as smart devices, laptops or computers with wireless network adapters, without using an AP. WiFi Direct supports WiFi Protected Setup (WPS) connection method, which is known as the WSC (WiFi Simple Configuration) Config Methods in the Wi-Fi Peer-to-Peer (P2P) Technical Specifications, in particular WPS Push Button method with WPA2.

From the negotiation process, each device will determine which devices become group owner (GO) or group client (GC). The “GroupOwnerIntent” field in the P2P information element (IE) will indicate the level of desire to become the GO. The higher the value, the higher the desire to be the GO. Since MRF24WG0MA/B supports the role of GC only, it implies GroupOwnerIntent=0 (P2P IE). Within each WiFi Direct network, there can be only one GO, similar to only single AP in the infrastructure network.

1.7.4 SoftAP Network

Figure 1-4 provides a typical example of common local network, software enabled AP (SoftAP) network. Current RF module firmware version only has the MRF24WG0MA/B Wi-Fi® PICtail™ programmed to support this network type.

FIGURE 1-4: SOFTAP NETWORK

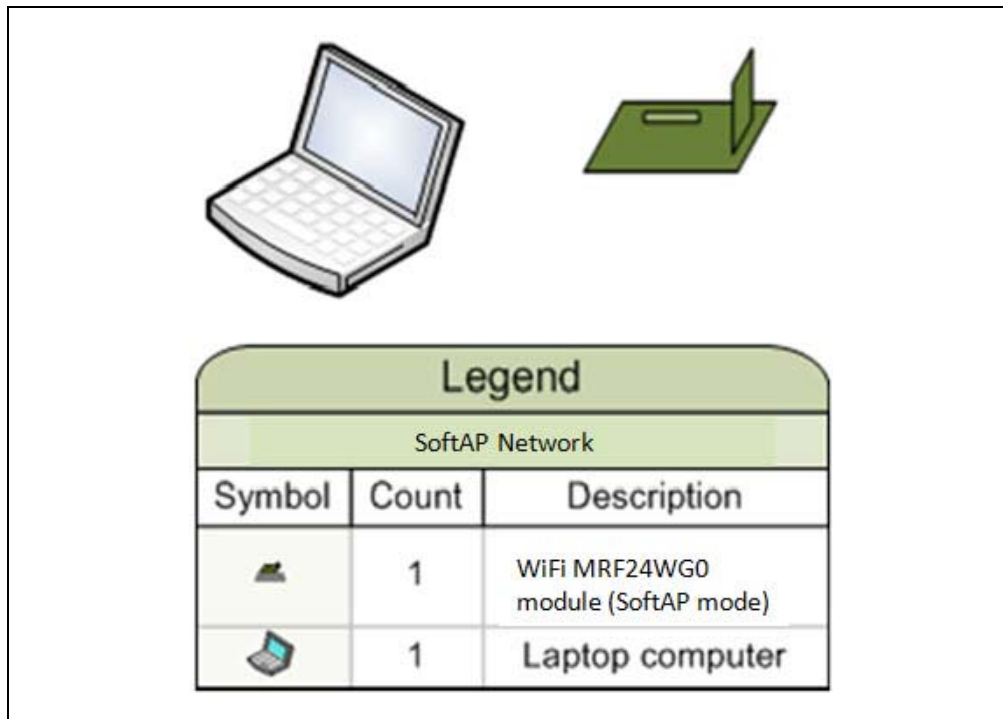

SoftAP functions can be used to extend wireless coverage and share internet connection with others.

NOTES:

Chapter 2. Hardware Setup and Configuration

2.1 PICTAIL SETUP

The MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICTail™ can be plug into either the PICTail Plus (Explorer 16) using the card edge connector or the PICTail slot (PICDEM.net 2) using the pin header on the development board, see [Figure 2-1](#).

FIGURE 2-1: MRF24WB0MA/B OR MRF24WG0MA/B WI-FI® PICTAIL™




When inserting the PICTail into the development board, orient the PICTail with the module facing the microcontroller.

2.2 PICDEM.NET 2

The PICDEM.net 2 can be used to demonstrate wireless functionality by connecting the PICTail with header J1 on the PICTail inserted into connector J5 on the PICDEM.net 2 Development Board, see [Figure 2-2](#).


FIGURE 2-2: PICDEM.NET2 DEVELOPMENT BOARD WITH MRF24WB0MA/B OR MRF24WG0MA/B WI-FI® PICTAIL™

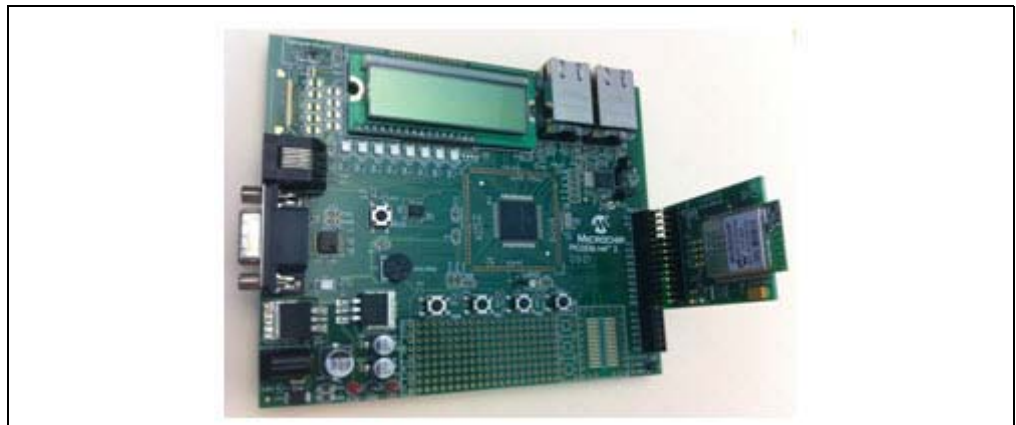

2.3 EXPLORER 16 AND PIC32 STARTER KIT

The Explorer 16 and PIC32 Starter Kit can be used to demonstrate wireless functionality by connecting the PICTail with header J1 on the PICTail inserted into the top slot of connector J5 (Explorer 16) or J4 (I/O Expansion Board) on the PIC32 Starter Kit boards, see [Figure 2-3](#).

FIGURE 2-3: EXPLORER 16 AND PIC32 STARTER KIT WITH MRF24WB0MA/B OR MRF24WG0MA/B WI-FI® PICTAIL™

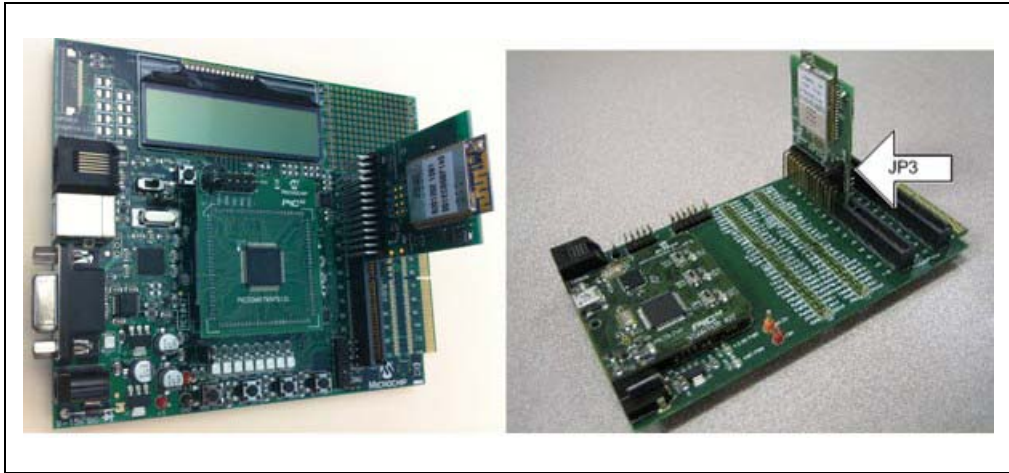

2.4 CONNECTING THE DEVELOPMENT BOARD

Warning: The boards in this kit are highly sensitive to electrostatic discharge (ESD). Maintain ESD practice while in contact with the boards.

Perform the following actions to connect the development board:

1. Connect RJ11 cable (grey phone cable) from the RJ11 port on the development board to the ICD.
2. Applicable only to Explorer 16 and PICDEM.Net2:
 Connect the serial cable to the serial port (UART port) of the development board and to the serial port (COM port) on the PC (typically, the default port on the PC is COM 1, but the default number may differ from PC to PC). This is required to monitor the debug messages from the MLA TCP/IP software stack. Refer to [2.6 “Serial Monitor Setup”](#), for more information on setting up the serial connection.
3. Connect the USB cable from the ICD to the PC.
4. Power-up the development board.
5. Power on the AP or router, and connect the PC to the AP or router with an Ethernet cable. If a wireless laptop (PC) is used, associate the computer with the correct SSID of the wireless AP.

2.5 WIRELESS ACCESS POINT (AP) SETUP

The following sections provide the settings and configuration options for the Linksys WRT54G2 Wireless-G Broadband Router. In this scenario, the terms “access point” and “router” are synonymous, and refer to the combination of these two networking parts as a single unit. The graphics in this section are specific to this particular AP. The concepts and items that need to be configured should be identical if a different AP is used.

- [Accessing the AP Configuration Pages](#)
- [Main AP Configuration Page](#)
- [Setting up the Wireless AP](#)


2.5.1 Accessing the AP Configuration Pages

Figure 2-4 shows the web interface to the AP. These web pages can be viewed from any web browser. Enter the IP address of the AP, for example `http://192.168.1.1`, in the URL. The Linksys WRT54G2 Wireless-G Broadband Router uses the IP address, `http://192.168.1.1`.

When prompted with the authentication text box, leave the “User Name:” field blank, and use “admin” as the password in the “Password:” field.

The IP address of the AP and configurations or settings may vary for each model. Refer to the access point operating manual, for more information.

FIGURE 2-4: ACCESS POINT LOGIN

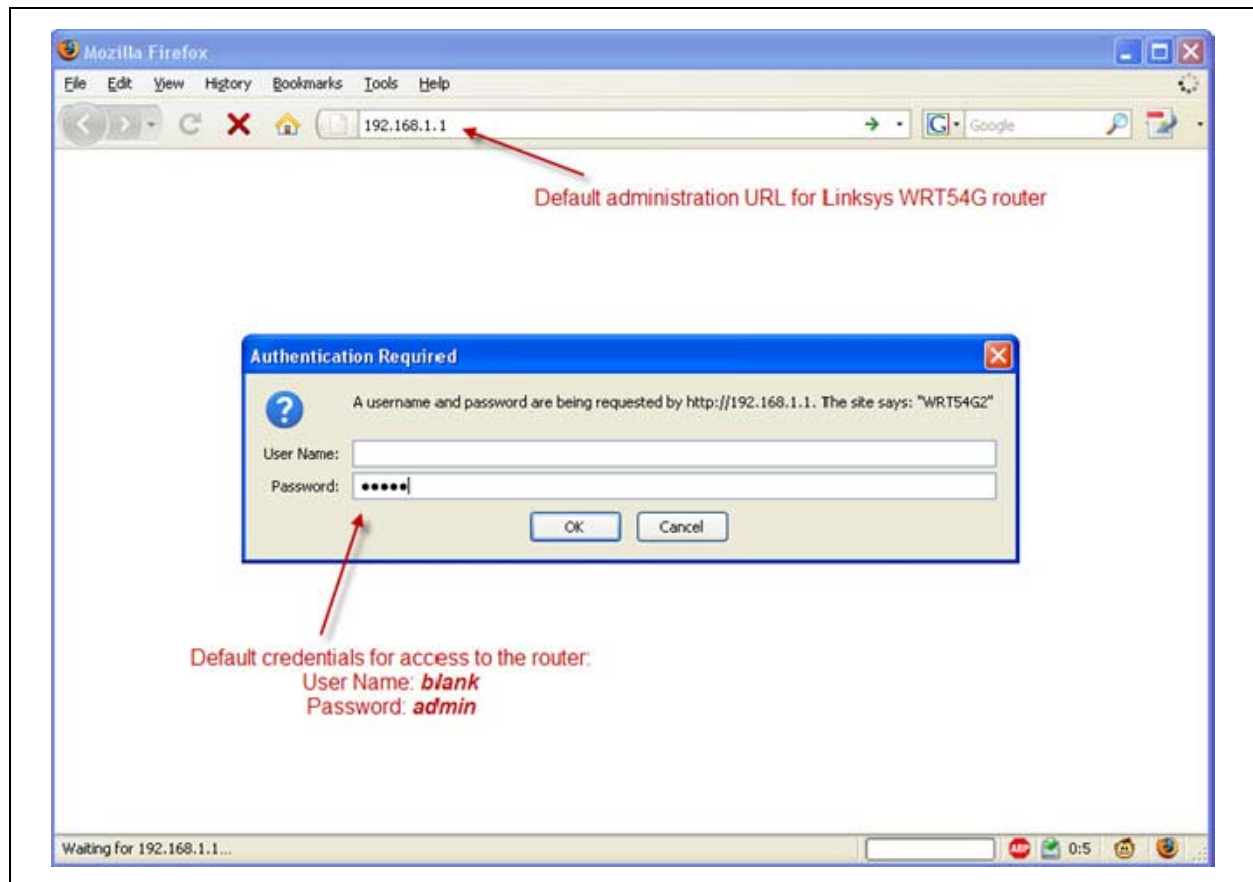

2.5.2 Main AP Configuration Page

After authenticating with AP, the configuration page will be displayed. The settings on the configuration page are for configuring the router portion of the system. Most of the default settings are pre-programmed and enough for the demonstration. By default, the WRT54G router acts as a DHCP server. For the demonstration, consider AP as the DHCP server, as shown in [Figure 2-5](#).

FIGURE 2-5: AP CONFIGURATION PAGE

LINKSYS[®] by Cisco Firmware Version: 1.0.03

Wireless-G Broadband Router WRT54G2

Setup | **Wireless** | **Security** | **Access Restrictions** | **Applications & Gaming** | **Administration** | **Status**

Basic Setup | **DDNS** | **MAC Address Clone** | **Advanced Routing**

Internet Setup

Internet Connection Type: Automatic Configuration - DHCP

Optional Settings (required by some ISPs)

Router Name: WRT54G2

Host Name:

Domain Name:

MTU: Auto

Size: 1500

Network Setup

Router IP

Local IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

Network Address Server Settings (DHCP)

DHCP Server: ☒ Enable ☐ Disable

Starting IP Address: 192.168.1.100

Maximum Number of DHCP Users: 50

Client Lease Time: 0 minutes (0 means one day)

Static DNS 1: 0.0.0.0

Static DNS 2: 0.0.0.0

Static DNS 3: 0.0.0.0

WINS: 0.0.0.0

Time Setting

Time Zone: (GMT-08:00) Pacific Time (USA & Canada)

☒ Automatically adjust clock for daylight saving changes

Automatic Configuration - DHCP: This setting is most commonly used by Cable operators.

Host Name: Enter the host name provided by your ISP.

Domain Name: Enter the domain name provided by your ISP.

Local IP Address: This is the address of the router.

Subnet Mask: This is the subnet mask of the router.

DHCP Server: Allows the router to manage your IP addresses.

Starting IP Address: The address you would like to start with.

Maximum number of DHCP Users: You may limit the number of addresses your router hands out.

Time Setting: Choose the time zone you are in. The router can also adjust automatically for daylight savings time.

Save Settings **Cancel Changes**

CISCO

2.5.3 Setting up the Wireless AP

1. To set up wireless AP, Click **Wireless** tab at the top of the screen.
2. Either Figure 2-6 or Figure 2-7 will be displayed. If Figure 2-6 is displayed, click **Manual** radio button and Figure 2-7 will be displayed. Figure 2-7 shows the basic wireless settings required for the demonstrations.

FIGURE 2-6: WI-FI PROTECTED SETUP (WPS)

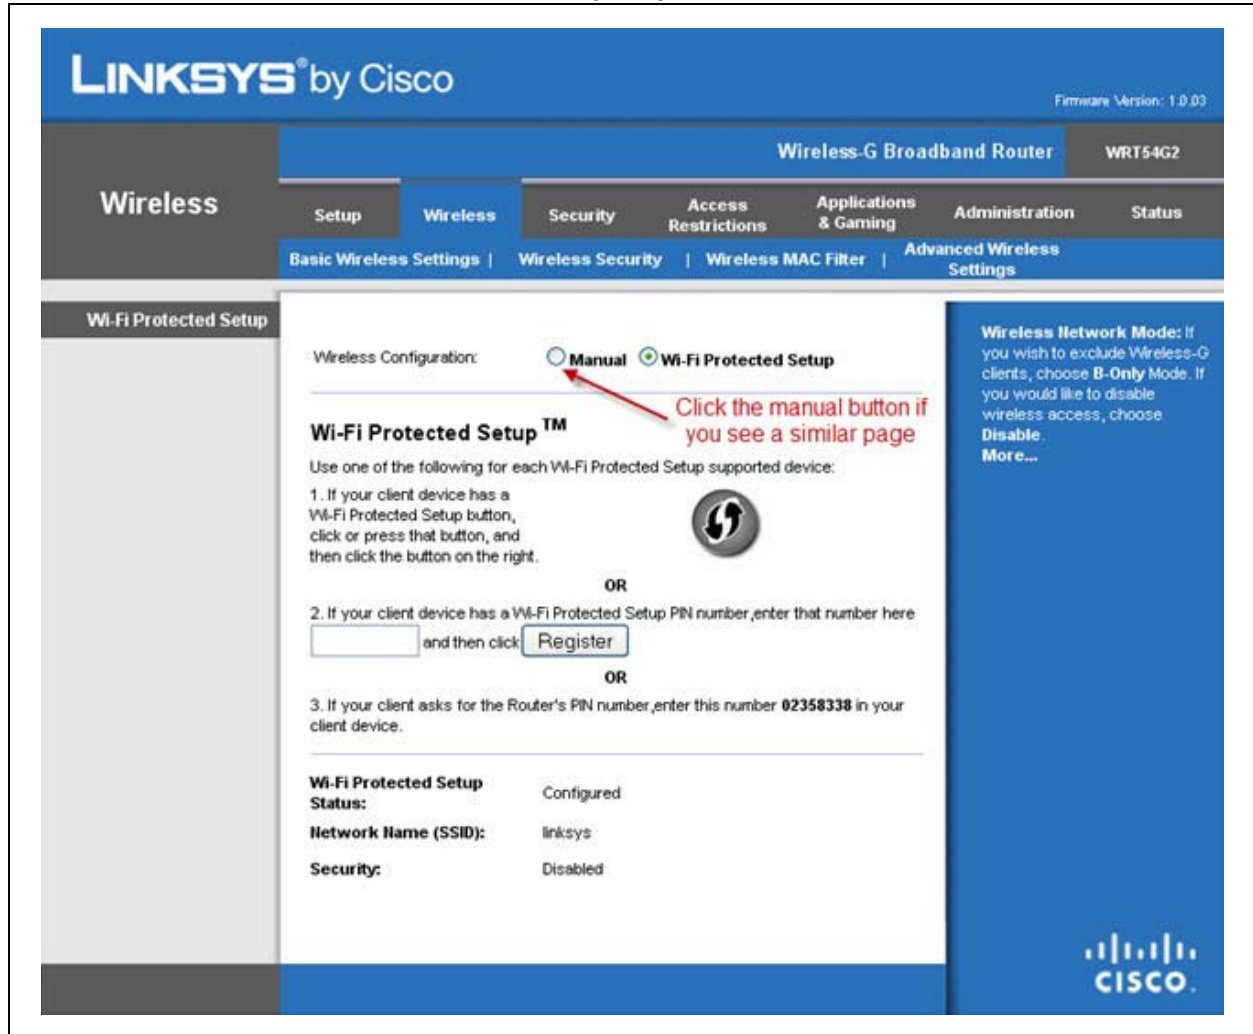


FIGURE 2-7: BASIC WIRELESS SETUP

LINKSYS® by Cisco

Firmware Version: 1.0.03

Wireless-G Broadband Router WRT54G2

Wireless Setup Wireless Security Access Restrictions Applications & Gaming Administration Status

Basic Wireless Settings | Wireless Security | Wireless MAC Filter | Advanced Wireless Settings

Wireless Network

Wireless Configuration: ☒ Manual ☐ Wi-Fi Protected Setup

Wireless Network Mode: Mixed

Wireless Network Name (SSID): MicrochipDemoAP

Wireless Channel: 6 - 2.437GHz

Wireless SSID Broadcast: ☒ Enable ☐ Disable

Wi-Fi Demo SSID Name

RF channel to use

By default, the Wi-Fi Demo will scan channels 1, 6, and 11

Wireless Network Mode: If you wish to exclude Wireless-G clients, choose **B-Only** Mode. If you would like to disable wireless access, choose **Disable**. [More...](#)

Save Settings Cancel Changes

CISCO

Table 2-1 provides a summary of the options that is required for the basic wireless settings and its expected values.

Table 2-1: Wireless Settings

Option	Value/Setting
Wireless network name (SSID)	MicrochipDemoAP or MicrochipDemoAP_123 (case sensitive), or any desired SSID network name
Wireless channel	Either channel 1, 6 or 11
Wireless network mode	Either mixed mode (b and g service) or B-only

- After the set up, click **Save Settings** button. The AP should confirm that the settings have been saved successfully to set up the AP for the demonstrations. For experimenting with wireless security modes, refer to [4.5.7.1 “Wired Equivalent Privacy \(WEP\)”](#) or [4.5.8 “WPA/WPA2”](#).


2.6 SERIAL MONITOR SETUP

The Serial Monitor Setup is applicable for Explorer 16 and PICDEM.Net2 development boards. The MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ displays and send status information to the serial UART port on the Microchip development board that is useful for debugging. This section provides detailed information on setting up a terminal session to view this output by using "HyperTerminal" as an example. The same approach is used for other serial port monitors such as Tera Term and so on.

2.6.1 To Set up Serial Monitor

1. Launch HyperTerminal from the **Run** from the Windows **Start** menu or directly from the Windows **Start** menu, see [Figure 2-8](#).

FIGURE 2-8: STARTING HYPERTERMINAL FROM RUN DIALOG

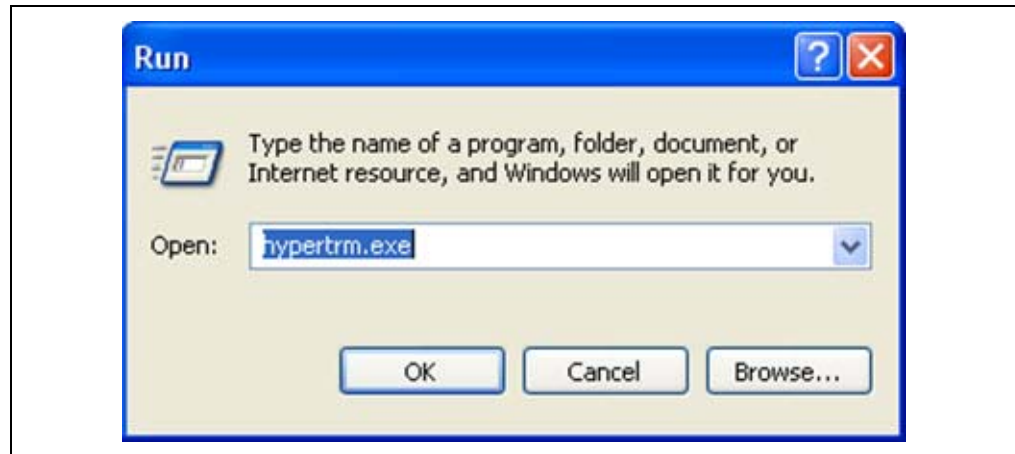

2. Name the connection and press **OK**, see [Figure 2-9](#).

FIGURE 2-9: HYPERTERMINAL NAME SETUP




3. Select the COM port as the listening port. Generally, the COM port will be COM1, check the system to ensure correct port is selected and then press **OK**, see [Figure 2-10](#).

FIGURE 2-10: COM PORT CONNECTION



4. Choose communication port parameters and then press **OK**, see [Figure 2-11](#).

FIGURE 2-11: COM COMMUNICATION SETTINGS

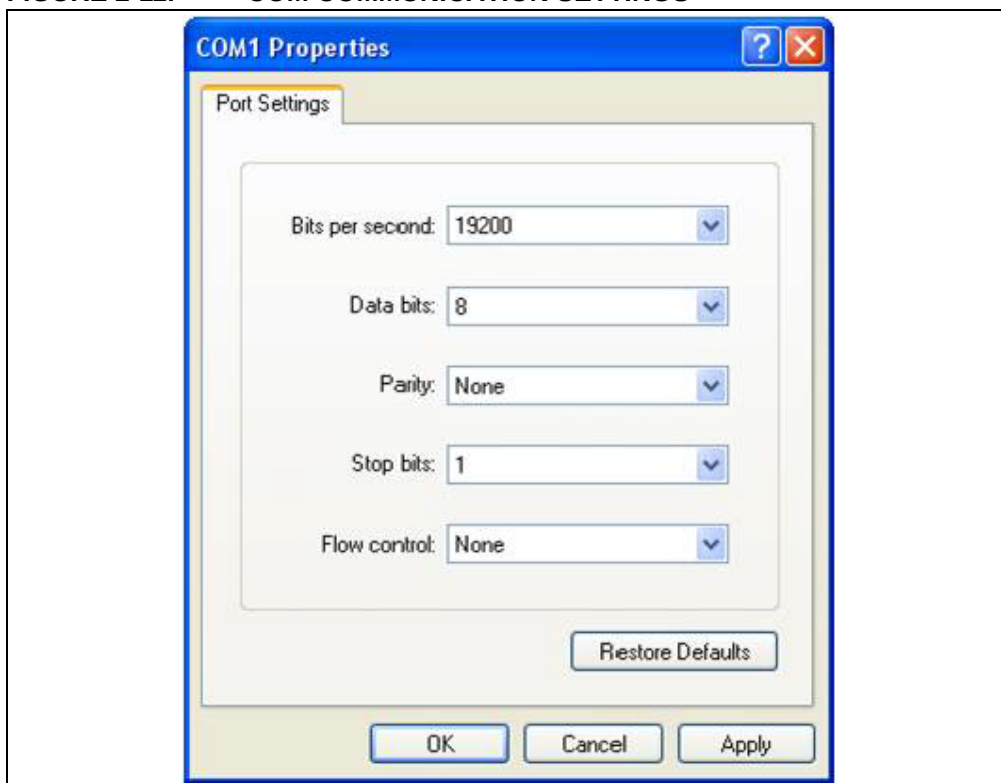

5. After the serial port monitor is set up it will print the messages from the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™.



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Chapter 3. Software Setup and Configuration

3.1 SOFTWARE ITEMS TO INSTALL

The following are required to install the software:

- Microchip MPLAB Integrated Development Environment (MPLAB® X IDE)
- Microchip MPLAB® XC compiler (PIC24/32) and Microchip MPLAB C18 Compiler (PIC18)
- Microchip TCP/IP stack installer (which contains the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® driver)

- Note 1:** Microchip In-circuit Debugger, for example ICD 3 or REAL ICE™ driver is embedded with the MPLAB X IDE installation.
- 2:** The screenshots provide references to older versions of the MPLAB X IDE, and older compiler and TCP/IP stack versions. These screenshots are for visual cues only, and the latest versions should be installed from the Microchip web site.

3.2 INSTALLING THE MICROCHIP MPLAB® X IDE

The path to the MPLAB X IDE is available on the Microchip web site, see [A.2 “Microchip Software”](#). After downloading the installer, execute the setup file and follow the GUI instructions for installing the MPLAB X IDE on your computer. Restart the computer after the installation.

3.3 INSTALLING THE MICROCHIP MPLAB® XC/C18 COMPILER

Different versions of the MPLAB XC compiler for different PIC microprocessors are available. For PICDEM.net 2 Development Board, the C18 compiler for PIC18 MCUs is required. For Explorer 16 Development Board, either the XC16 compiler for PIC24/dsPIC or the XC32 compiler for PIC32 devices is required.

Microchip offers evaluation copies of the compilers (student versions) that can be downloaded from the Microchip web site, refer to [A.2 “Microchip Software”](#). After downloading the installer, run through the setup to install the compiler on your system.

3.4 INSTALLING THE MICROCHIP TCP/IP STACK WITH MRF24WB0MA/B OR MRF24WG0MA/B WI-FI® DRIVER

The TCP/IP stack and MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® driver is available in two different forms:

- CDROM disc
- Download from Microchip web site (www.microchip.com)

A CDROM disc with the installer is bundled with the development kit provided by MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® Wireless. Optionally, the installer can be downloaded from the Microchip web site, refer to **A.2 “Microchip Software”**. It is recommended to download the latest software version from the Microchip web site, which covers latest bug fixes and the best support for current versions of the compilers.

The installer by default installs the stack code, driver, documentation and demonstration project files into versioned directory, where version is denoted by the MLA date, for example, C:\Microchip Solutions v2012-08-22.

3.5 INSTALLING INTERIM CODE RELEASES

User may need to install special interim code releases that are not part of the functionary code library provided by Microchip and MRF24WB0MA/B or MRF24WG0MA/B. The reasons can be high priority bug fixes, new features that are required by the customers and so on.

3.5.1 To Install the Interim Code

1. Save any open files in the C:\Microchip Solutions directory and quit the MPLAB X IDE.
2. Open the zip file to view affected directories.
3. Save required work files from this directories to another location.
4. Unzip or copy the directories in the zip file to the C:\Microchip Solutions directory.
5. Restart the MPLAB X IDE to use the codes.



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Chapter 4. Sample Application Demonstrations

The development environment is equipped with three out-of-the-box WiFi demonstrations to showcase the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® module. More demonstrations and features may be added in the future.

These demonstrations are illustrated based on Microsoft Windows® OS and the Linksys WRT54G2 Wireless-G Broadband Router. The concepts remain the same for different OS or router.

The following network types (MY_DEFAULT_NETWORK_TYPE) are supported, as indicated in the WF_Config.h file:

- CFG_WF_INFRASTRUCTURE
- CFG_WF_ADHOC
- CFG_WF_P2P (applicable only for MRF24WG0MA/B)
- CFG_WF_SOFT_AP (applicable only for MRF24WG0MA/B)

Note: SoftAP, WiFi Direct (P2P) and WiFi Protected Setup (WPS) are only supported by stack version v5.42 and newer version.

4.1 BASIC DEMONSTRATION APPLICATIONS

- [TCPIP – Demo App](#)
- [TCPIP – WiFi Console](#)
- [TCP/IP – WiFi EZConfig](#)

Detailed information is available in the Microchip TCPIP Stack Help.chm help file, which is part of the TCP/IP Stack source code releases.

4.1.1 TCPIP – Demo App

A powerful WiFi demonstration that shows a web server that enables you to perform many application level activities such as send and process form data, send emails, upload files and so on. This demonstration highlights many applications that are supported by the Microchip TCP/IP stack and how they can be used with WiFi.

Supported network types:

- CFG_WF_INFRASTRUCTURE
- CFG_WF_ADHOC
- CFG_WF_P2P (applicable only for MRF24WG0MA/B)

In addition, this demonstration is used to showcase the two WPS connection methods:

- WF_SECURITY_WPS_PUSH_BUTTON
- WF_SECURITY_WPS_PIN

4.1.2 TCPIP – WiFi Console

TCP/IP – WiFi Console is a throughput performance demonstration using a tool called Iperf, which is a commonly used networking test tool. Iperf will allow you to measure the throughput bandwidth on the WiFi link for both receive and transmit.

Supported network types for TCP/IP - WiFi Console:

- CFG_WF_INFRASTRUCTURE
- CFG_WF_ADHOC
- CFG_WF_P2P (applicable only for MRF24WG0MA/B)

4.1.3 TCP/IP – WiFi EZConfig

TCP/IP - WiFi EZConfig demonstration configures an embedded device on a wireless network. It utilizes the web server of the TCP/IP stack and a wireless ad hoc (IBSS) network to allow the user to input the desired network information from a client browser, and then Reset the device to connect to the desired network.

Supported network types:

- CFG_WF_ADHOC
- CFG_WF_SOFT_AP (applicable only for MRF24WG0MA/B)

4.2 WALKTHROUGH AND INSTRUCTIONS ON RUNNING THE DEMONSTRATION

This section consists of the following logical sections:

- [Opening Existing Projects](#)
- [Hardware Configuration Options](#)
- [Compile-Time Configuration Options](#)
- [Compiling and Downloading Images](#)
- [Running TCP/IP – Demo App](#)
- [Running the TCPIP – WiFi Console](#)
- [Running the TCPIP – WiFi EZConfig](#)


4.3 OPENING EXISTING PROJECTS

This section describes the TCP/IP demonstration application running on an Explorer 16 Development Board with a PIC24/32 PIM module installed. The configuration, compile and downloading of the code image to the PIC MCUs is the same for all of the development boards, MCUs and demonstration applications. After starting the MPLAB X IDE, the user can open an existing project.

4.3.1 To Open an Existing Project


1. To open an existing project, from *File>Open Project*, see [Figure 4-1](#).

FIGURE 4-1: OPEN AN EXISTING MPLAB PROJECT

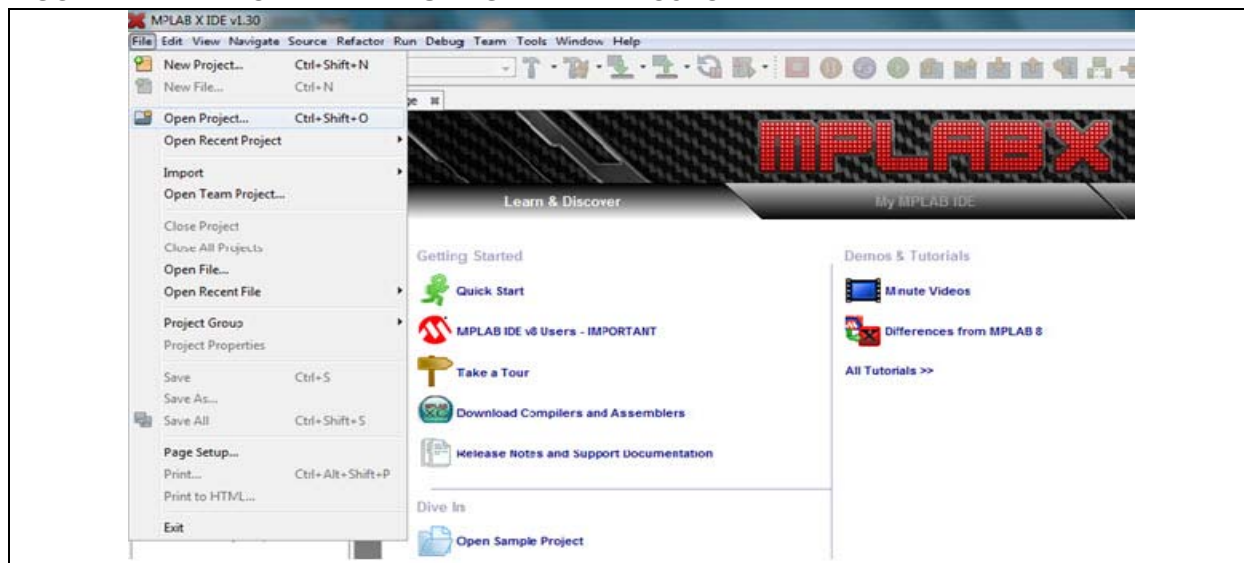

2. Open Project dialog box is displayed. In the "File name", choose C:\Microchip Solutions\TCPIP\Demo App to display folders, see [Figure 4-2](#).

FIGURE 4-2: OPEN PROJECT DIALOG

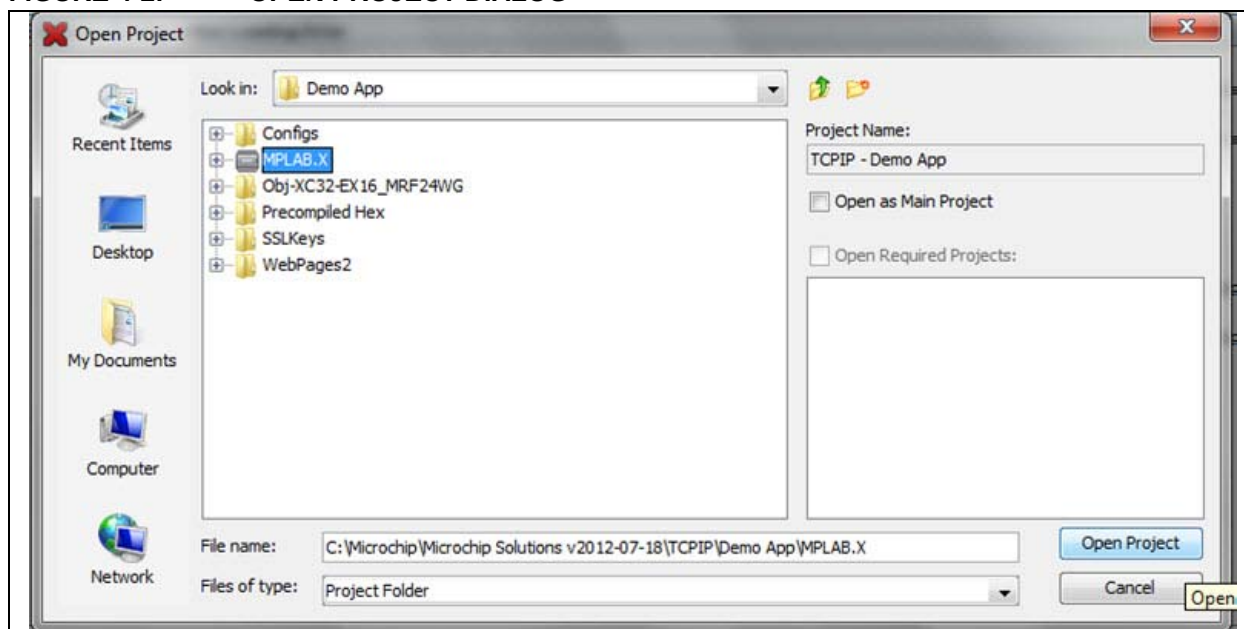

3. Click MPLAB.X folder, and then click **Open Project** to open a project.


4.4 HARDWARE CONFIGURATION OPTIONS

Depending on the development board used, the relevant hardware profile header file must be changed to match the configuration of the slot on which the PICtail is plugged into. For Explorer 16 with XC32 configurations, the hardware profile header file is HWP EX16_MRF24W_XC32.h. Ensure that the selected SPI option (MRF24W_IN_SPI1 or MRF24W_IN_SPI2) matches the development board's setup. Figure 4-3 shows the location of the required changes.

Required hardware profile header files for the development boards:

- PICDEM.net 2 Development Boards, only one configuration for the PICtail and MRF24W_IN_SPI1 to be defined
- Explorer 16 Development Board using PIC24FJ128GA010, use either MRF24W_IN_SPI1 or MRF24W_IN_SPI2; if it matches the location that the PICtail is plugged into the card edge connector (SPI1 refers to the upper location, closest to the LCD)
- dsPIC33FJ256GP710, this Plug-In Module (PIM) works only when MRF24W_IN_SPI2 is defined and the PICtail is plugged into the middle card edge socket

FIGURE 4-3: HWP EX16_MRF24W_XC32.H SPI OPTIONS

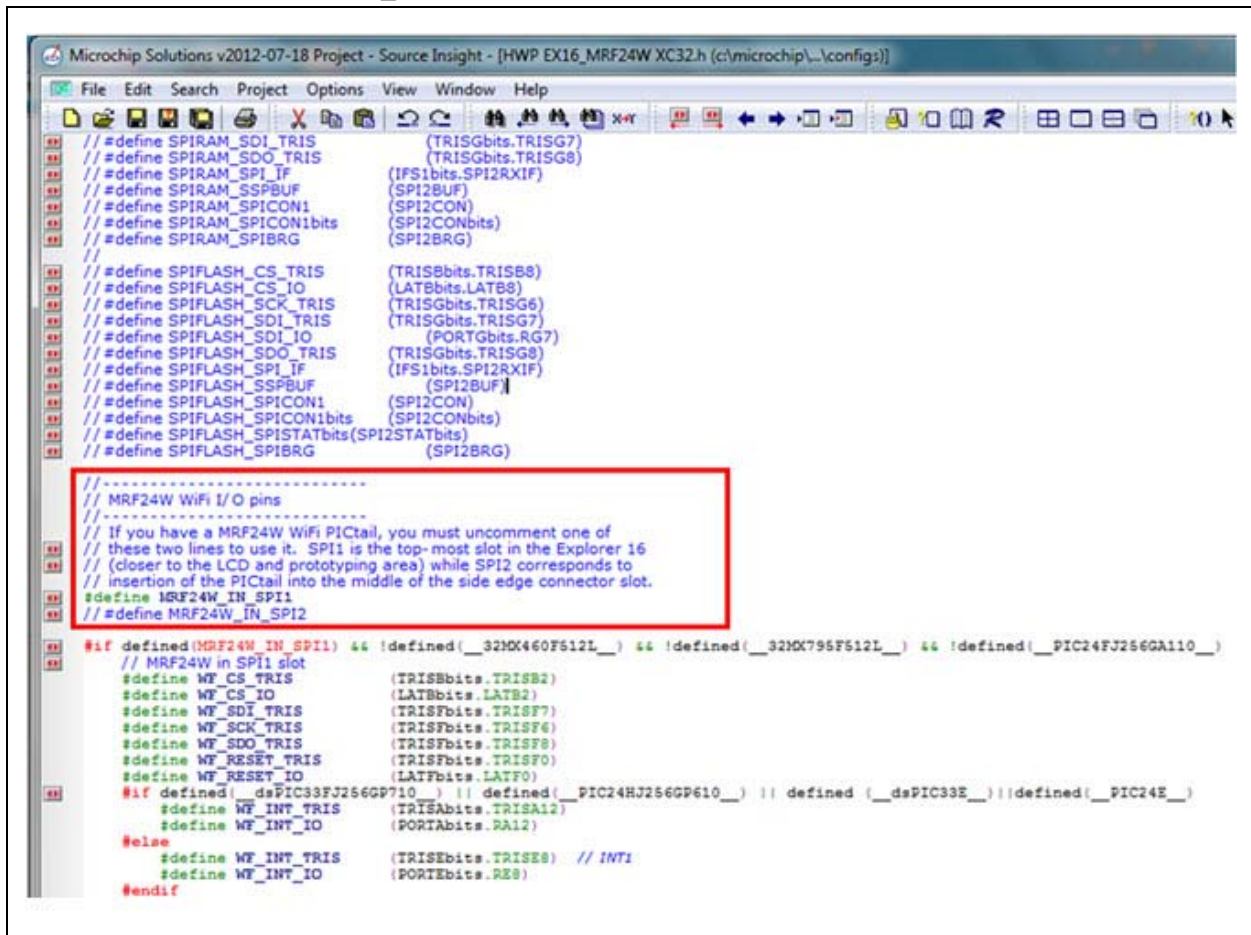

4.5 COMPILE-TIME CONFIGURATION OPTIONS

The following files contain most of the compile-time options for the demonstrations:


- TCPIP_MRF24W.h, located in the Configs sub folder within individual demonstrations. For example, \TCPIP\Demo App\Configs\TCPIP_MRF24W.h.
- WF_Config.h, located within the individual demonstrations. For example: \TCPIP\Demo App\WF_Config.h

These files can be viewed within the MPLAB X IDE using the file navigator.

4.5.1 SSID

The network name is stored in the variable MY_DEFAULT_SSID_NAME (MY_INFRASTRUCTURE_SSID) in WF_Config.h file. To change the network name, you must modify the defined name as shown in [Figure 4-4](#).

FIGURE 4-4: MODIFYING SSID

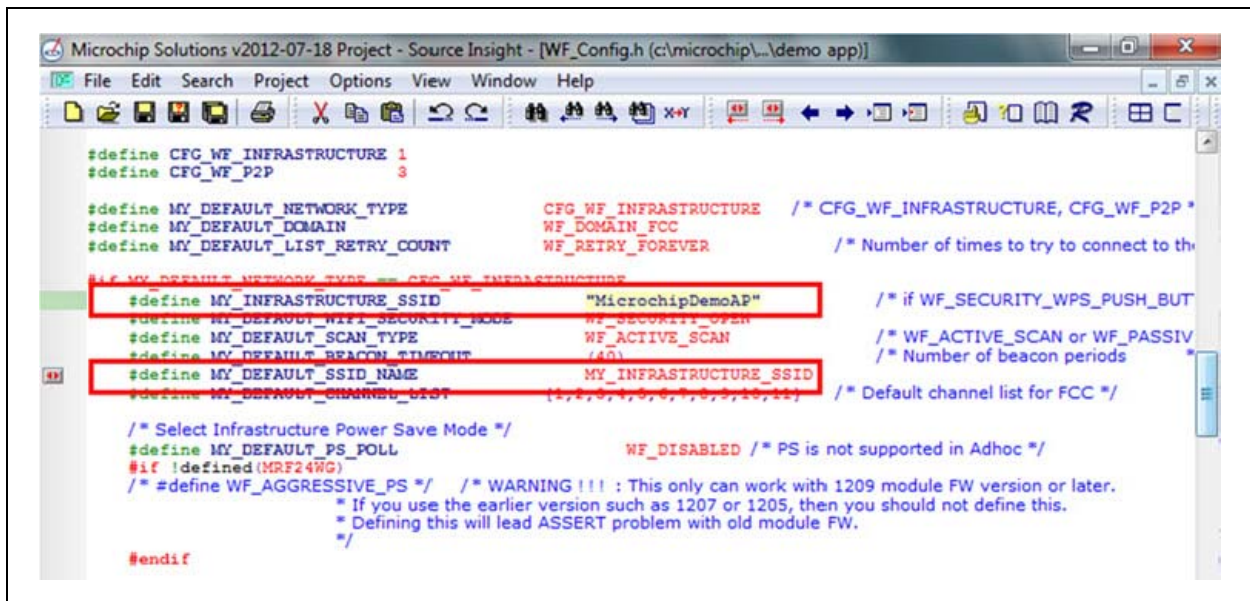

Note: If selected network type is WiFi Direct (CFG_WF_P2P), the SSID is unique and is defined as DIRECT-.


4.5.2 Static IP Address

By default, the demonstrations use DHCP and rely on the DHCP server in the AP or router to give the development board an IP address on the network.

4.5.2.1 TO ENABLE THE USE OF A STATIC IP ADDRESS


1. The selected static IP address must be on the same subnet as the AP. By default, the Linksys WRT54G manages IP addresses on the subnet 192.168.1.x (192.168.1.1 is for AP). The IP address above 192.168.1.100 are dynamically managed by the DHCP server. Therefore, ideal to assign a unique static IP address in the range of 192.168.1.2 – 192.168.1.99.
2. Two sections of the code must be changed to use the static IP address. To stop the development kit to request a dynamic address, comment the variables `STACK_USE_AUTO_IP` and `STACK_USE_DHCP_CLIENT` in the `\configs\TCPIP MRF24W.h` file, see [Figure 4-5](#).

FIGURE 4-5: DISABLE AUTO IP AND DHCP CLIENT

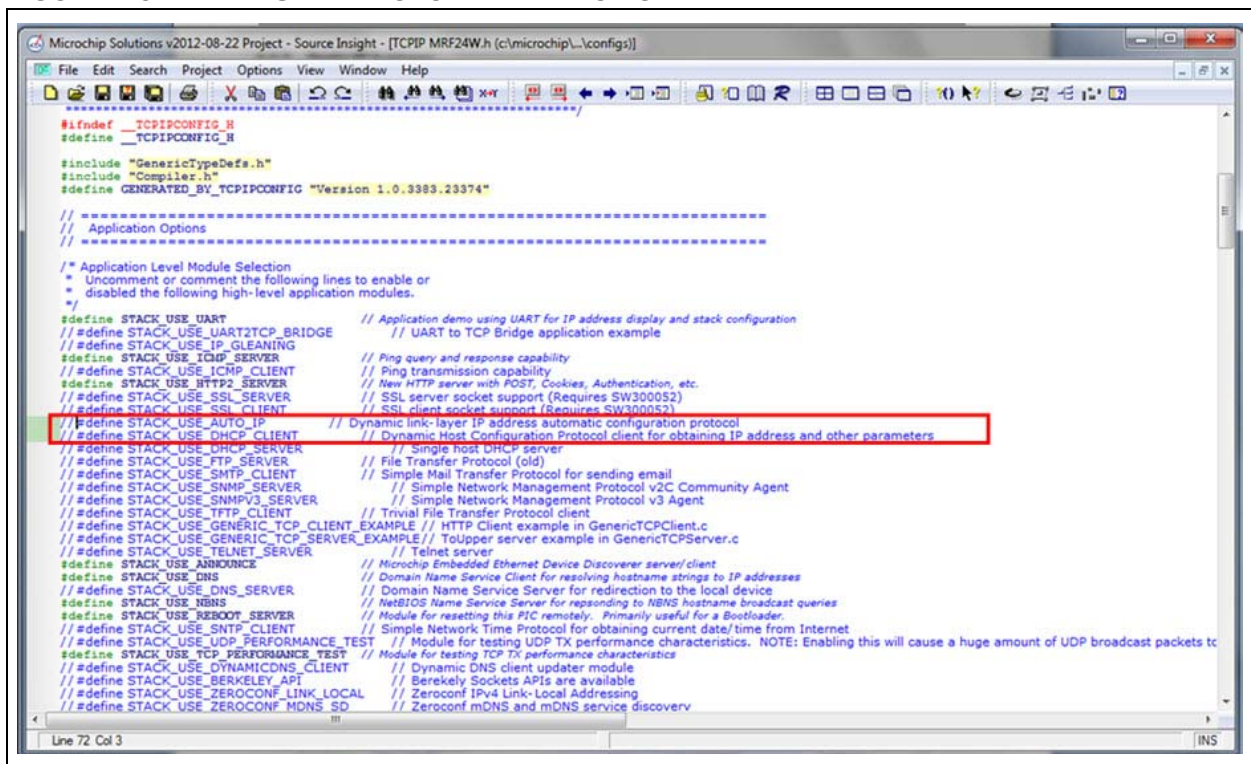

3. Define the IP address to statically use in `MY_DEFAULT_IP_ADDR_BYTEx`, and match the default mask (`MY_DEFAULT_MASK_BYTEx`) to match the router (for the default Linksys AP, the default mask is 255.255.255.0), see [Figure 4-6](#).

FIGURE 4-6: SETTING UP STATIC IP ADDRESS

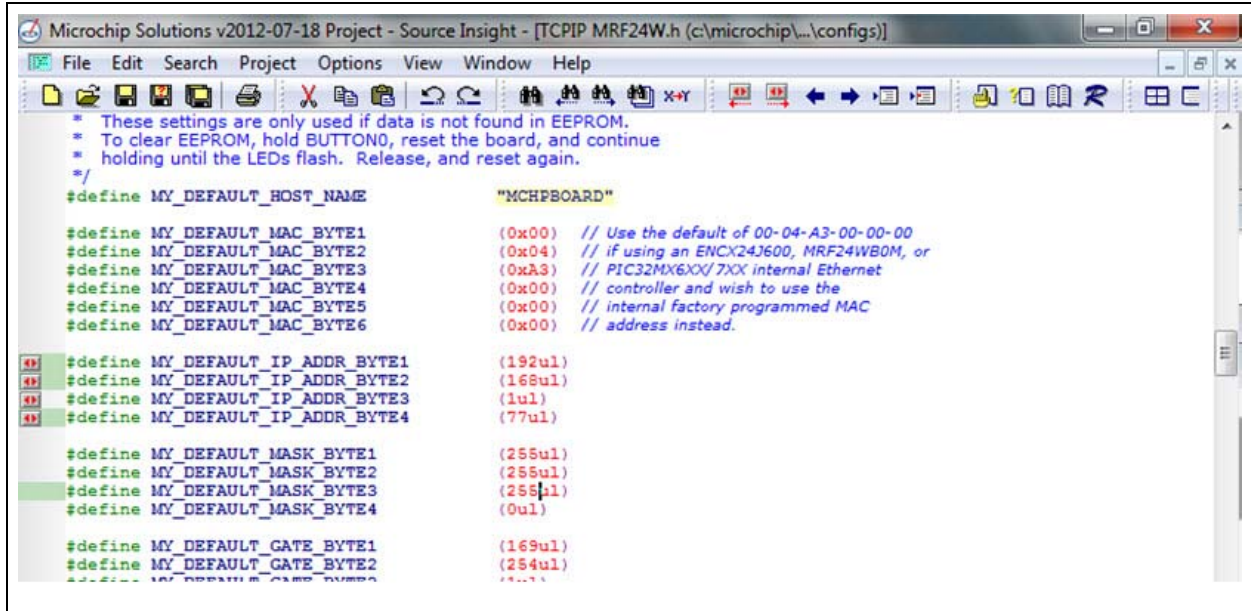

4.5.3 MAC Address

In the system there are three sources for the MAC address:

- Built-in MAC address on the MRF24WB0MA/B or MRF24WG0MA/B WiFi® module that is preprogrammed from the factory with the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® OUI
- Programmed code image
- Value that is stored in the EEPROM

At run-time, a data structure is created in RAM, which stores the valid MAC address (amongst other information) to be used for that session. The code will check if a valid data structure is located in the EEPROM. If the valid data structure exists in EEPROM, then those values will be used, overriding what is programmed inside the chip and/or programmed in the code at compile-time.

If no data structure exists in the EEPROM, then the value that is stored in the `\configs\TCPIP_MRF24W.h` file will be used. If the value in the source code is `00:04:A3:00:00:00`, then it indicates to the program that the value that has been preprogrammed in the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® module should be used. Otherwise, the value that is placed into the `MY_DEFAULT_MAC_BYTEx` will be used. Additionally, if no valid data structure exists in the EEPROM, the new value will be programmed and stored to the EEPROM for the future use.

EEPROM has the highest priority. Therefore, if a value for the MAC address is programmed to the EEPROM, no other value can override it. To change the values, EEPROM must be erased. Refer to the instructions specified in [5.3 “Erasing EEPROM”](#).

4.5.4 Channel Configuration

802.11b and 802.11g divide the 2.4 GHz spectrum into 14 channels, from channel 1 through channel 14. The bandwidth of each channel is 20 MHz which means that channels may overlap. The commonly used non overlapping channels and social channels are channels 1, 6 and 11.

The RF channel that is used can be configured at compile-time. The following two inter-related options control channels data transmission:


- Regulatory domain, as specified by `MY_DEFAULT_DOMAIN`. Different domains have different channel offerings, hence it must match with the intended country and channel
- Channel scan list (`MY_DEFAULT_CHANNEL_LIST`), which is an array of channels that will be scanned for RF activity.

Note: If more channels to scan, it takes longer time to connect.

As illustrated in [Figure 4-7](#), the domain is set to FCC and there are 11 total channels in the scan list (1, 2, 3, 4, 5, 6, 7, 8, 9, 10 and 11).

Sample Application Demonstrations

FIGURE 4-7: CHANNEL SETUP

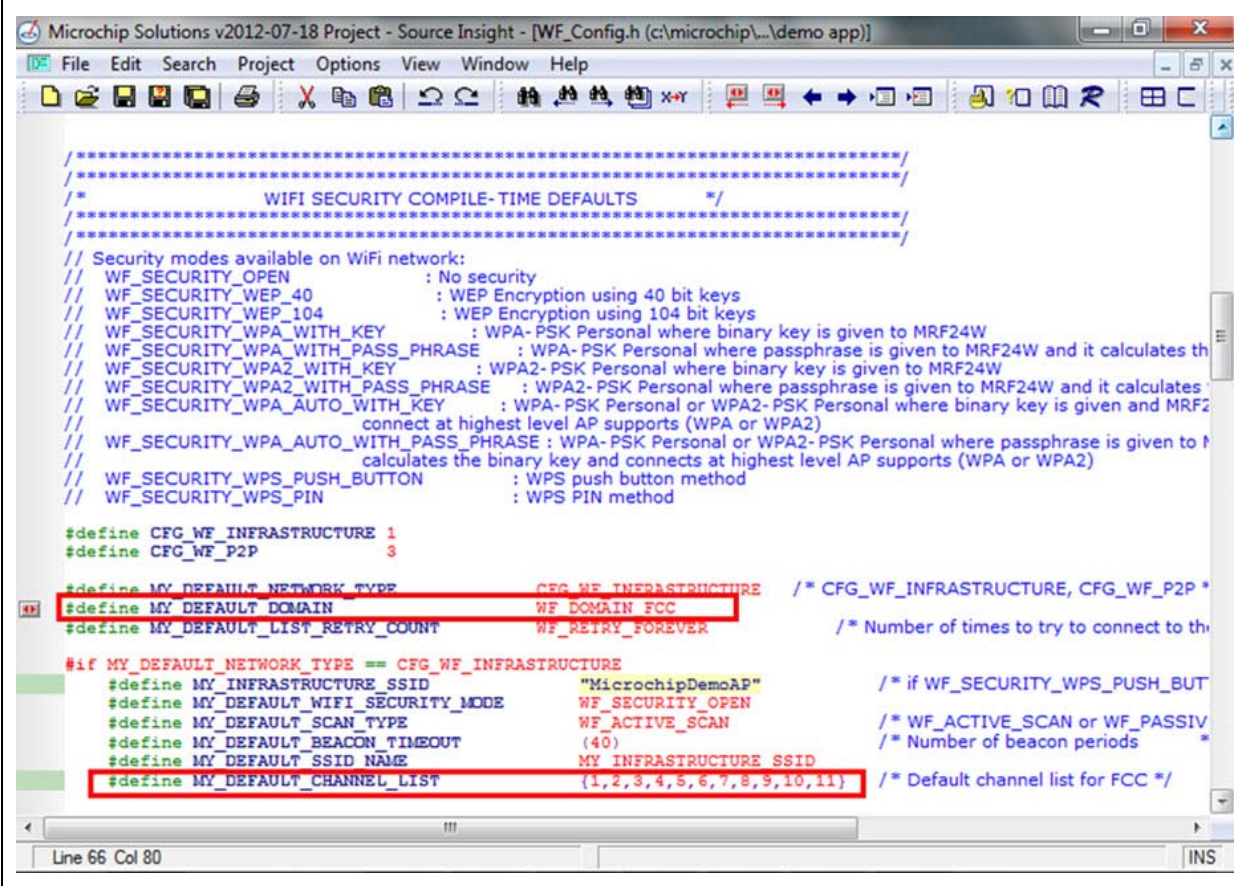

```
Microchip Solutions v2012-07-18 Project - Source Insight - [WF_Config.h (c:\microchip\...\demo app)]
File Edit Search Project Options View Window Help

/*
***** WIFI SECURITY COMPILE-TIME DEFAULTS *****
*/

// Security modes available on WiFi network:
// WF_SECURITY_OPEN           : No security
// WF_SECURITY_WEP_40         : WEP Encryption using 40 bit keys
// WF_SECURITY_WEP_104        : WEP Encryption using 104 bit keys
// WF_SECURITY_WPA_WITH_KEY    : WPA-PSK Personal where binary key is given to MRF24W
// WF_SECURITY_WPA_WITH_PASS_PHRASE : WPA-PSK Personal where passphrase is given to MRF24W and it calculates the binary key
// WF_SECURITY_WPA2_WITH_KEY   : WPA2-PSK Personal where binary key is given to MRF24W
// WF_SECURITY_WPA2_WITH_PASS_PHRASE : WPA2-PSK Personal where passphrase is given to MRF24W and it calculates the binary key
// WF_SECURITY_WPA_AUTO_WITH_KEY : WPA-PSK Personal or WPA2-PSK Personal where binary key is given and MRF24W connects at highest level AP supports (WPA or WPA2)
// WF_SECURITY_WPA_AUTO_WITH_PASS_PHRASE : WPA-PSK Personal or WPA2-PSK Personal where passphrase is given to MRF24W and it calculates the binary key and connects at highest level AP supports (WPA or WPA2)
// WF_SECURITY_WPS_PUSH_BUTTON : WPS push button method
// WF_SECURITY_WPS_PIN         : WPS PIN method

#define CFG_WF_INFRASTRUCTURE 1
#define CFG_WF_P2P            3

#define MY_DEFAULT_NETWORK_TYPE CFG_WF_INFRASTRUCTURE /* CFG_WF_INFRASTRUCTURE, CFG_WF_P2P */
#define MY_DEFAULT_DOMAIN       WF_DOMAIN_FCC
#define MY_DEFAULT_LIST_RETRY_COUNT WF_RETRY_FOREVER /* Number of times to try to connect to the network */

#if MY_DEFAULT_NETWORK_TYPE == CFG_WF_INFRASTRUCTURE
#define MY_INFRASTRUCTURE_SSID "MicrochipDemoAP" /* if WF_SECURITY_WPS_PUSH_BUTTON is enabled, this SSID is used for WPS */
#define MY_DEFAULT_WIFI_SECURITY_MODE WF_SECURITY_OPEN
#define MY_DEFAULT_SCAN_TYPE WF_ACTIVE_SCAN /* WF_ACTIVE_SCAN or WF_PASSIVE_SCAN */
#define MY_DEFAULT_BEACON_TIMEOUT (40) /* Number of beacon periods */
#define MY_DEFAULT_SSID_NAME MY_INFRASTRUCTURE_SSID
#define MY_DEFAULT_CHANNEL_LIST {1,2,3,4,5,6,7,8,9,10,11} /* Default channel list for FCC */
#endif
```

Depending on the selected domain (regions), the available channels vary. Refer to WFApi.h for detailed definitions, see [Example 4-1](#).

EXAMPLE 4-1: DOMAIN SPECIFIC CHANNELS

```
#define WF_DOMAIN_FCC (0) /* Available Channels: 1 - 11 */
#define WF_DOMAIN_ETSI (2) /* Available Channels: 1 - 13 */
#define WF_DOMAIN_JAPAN (7) /* Available Channels: 1 - 14 */
#define WF_DOMAIN_OTHER (7) /* Available Channels: 1 - 14 */
```


If the network type selected is WiFi Direct (CFG_WF_P2P), the channel list will be social channels, that is channel 1, 6 and 11.

Note: With MRF24WG0MA/B RF module firmware version 0x3107 and future releases, due to changes in FCC regulations, regional domains are not programmable.

4.5.5 Ad hoc Network Configuration

Changing to ad hoc (IBSS) network can be done at compile-time, the MY_DEFAULT_NETWORK_TYPE can be changed to CFG_WF_ADHOC, see [Figure 4-8](#).

FIGURE 4-8: SOURCE CODE AD HOC SETTINGS

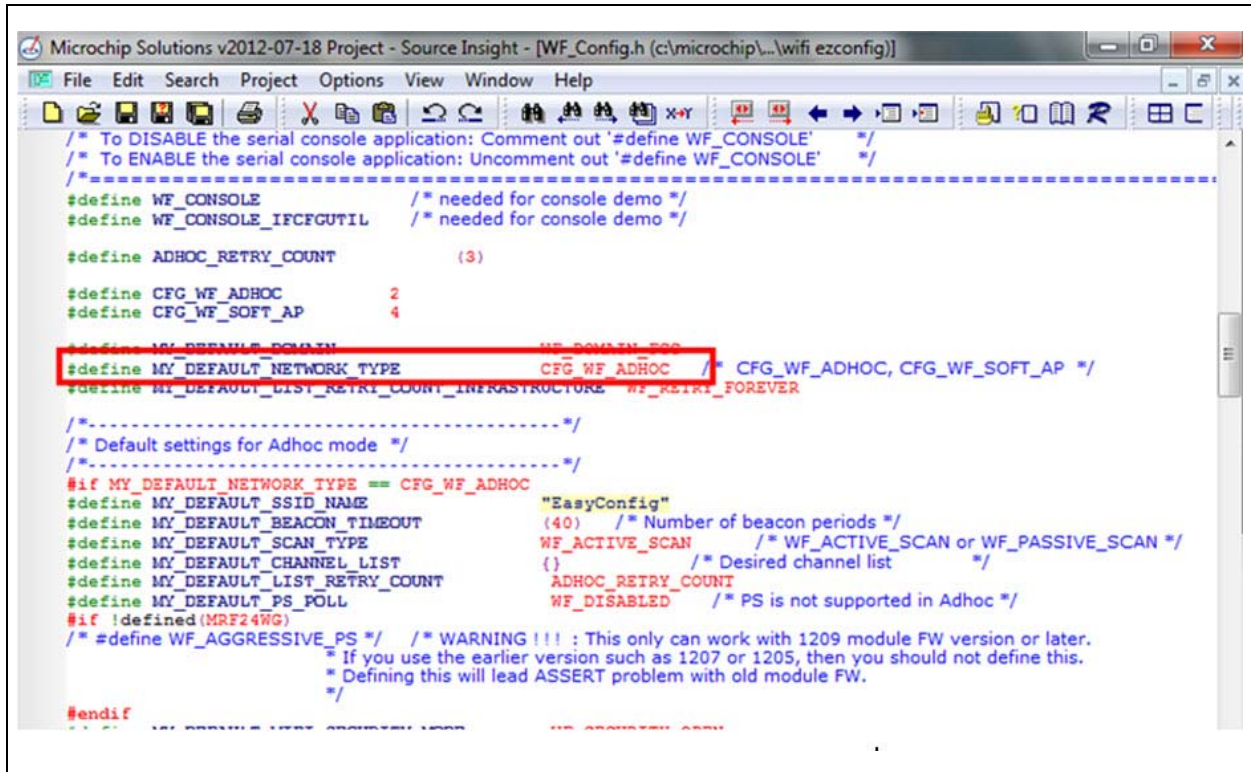

4.5.6 WPS Connection Method


WiFi Protected Setup (WPS) allows users to set up and expand the WiFi networks with security enabled, even if they are not familiar with the underlying technologies or processes involved. For example, users no longer have to know that SSID refers to the network name or WPA2 refers to the security mechanism.

WPS does not support ad hoc networks. WPS will configure the network name SSID and security key for the AP and WPS client devices on a network. It supports the WEP/ WPA/WPA2 security methods. [Figure 4-9](#) shows the WPS and security methods.

WPS offers the following setup solutions:

- Push Button Configuration (PBC) - users can connect the device to the network and enable data encryption by pushing the buttons on the AP and client device.
- Personal Information Number (PIN) - PIN is provided for each device which joins the network.

FIGURE 4-9: WPS AND SECURITY METHODS

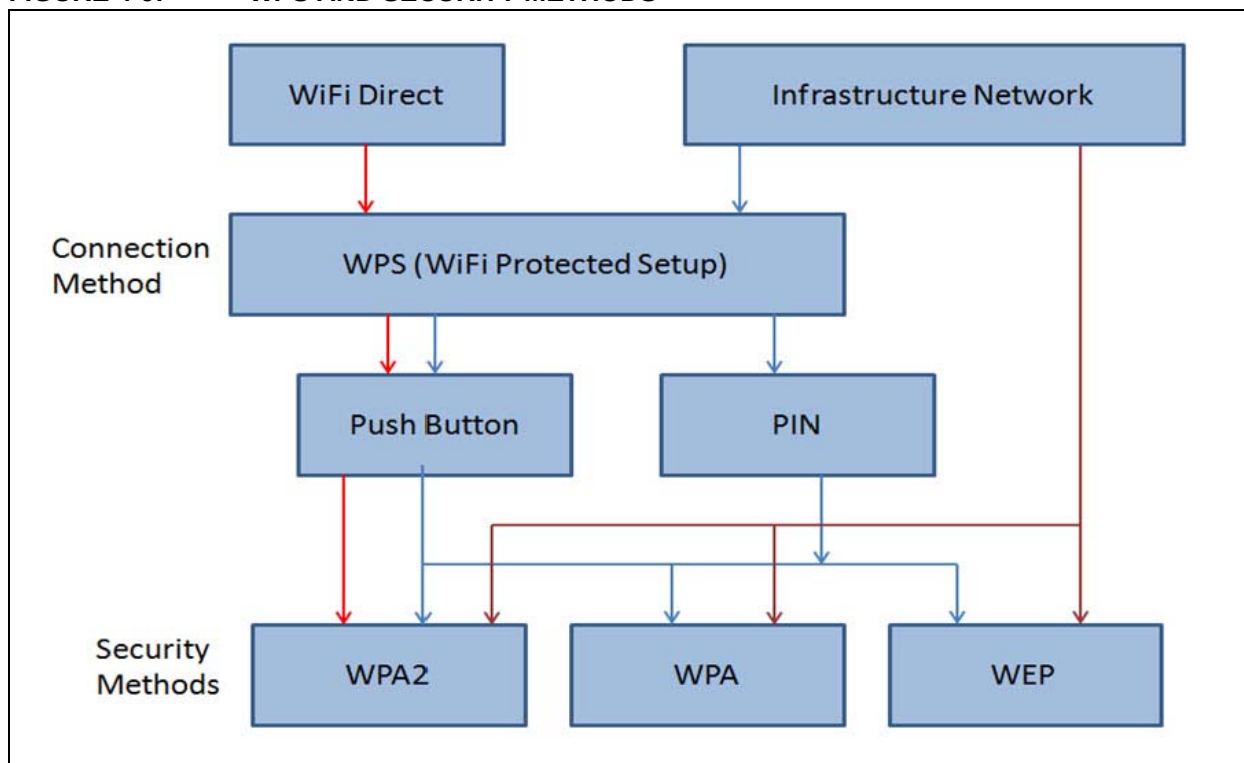

4.5.7 Wireless Security

4.5.7.1 WIRED EQUIVALENT PRIVACY (WEP)

Note: Several disadvantages are identified in WEP, which results in hackable and insecure networks. The use of WEP has been superseded by WPA/WPA2.

WEP security has two forms: 64-bit WEP, which uses a 40-bit key (WEP-40) and 128-bit WEP, which uses a 104-bit key (WEP-104).

In the basic form, WEP keys have hexadecimal values, 5 bytes for WEP-40 and 13 bytes for WEP-104. Some routers, such as the Linksys WRT54G, increase the random nature of the WEP key by adding an additional layer that converts an ASCII passphrase into a hexadecimal key. The MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICTail™ will require a hexadecimal key.

To enable WEP security between the development board and AP, setup the AP for security and program the development board with the correct WEP keys.

4.5.7.2 SETUP ACCESS POINT FOR WEP

1. Login to the router, see instructions in [2.5 “Wireless Access Point \(AP\) Setup”](#).
2. To access the wireless security options *Wireless>Wireless Security*, see [Figure 4-10](#).

FIGURE 4-10: 64-BIT WEP SECURITY SETUP

The screenshot shows the Linksys by Cisco Wireless-G Broadband Router (WRT54G2) configuration page. The 'Wireless' tab is selected, and the 'Wireless Security' sub-tab is active. The 'Security Mode' is set to 'WEP'. The 'WEP Encryption' is set to '64 bits 10 hex digits'. The 'Passphrase' field is empty, and the 'Key 1' field contains '0001020304'. A 'Generate' button is next to the passphrase field. On the right, a 'Security Mode' help box lists options: Disable, WPA Personal, WPA Enterprise, WPA2 Personal, WPA2 Enterprise, RADIUS, and WEP. At the bottom are 'Save Settings' and 'Cancel Changes' buttons.

3. To match the default code in the hardware, choose security features as shown in [Figure 4-11](#) (depending on whether 64-bit WEP or 128-bit WEP is used).

FIGURE 4-11: 128-BIT WEP SECURITY SETUP


The screenshot shows the Linksys by Cisco Wireless-G Broadband Router (WRT54G2) configuration page. The 'Wireless' tab is selected, and the 'Wireless Security' sub-tab is active. The 'Security Mode' is set to 'WEP'. The 'WEP Encryption' is set to '128 bits 26 hex digits'. The 'Passphrase' field is empty, and the 'Key 1' field contains '000102030405060708090a0b'. A 'Generate' button is next to the passphrase field. On the right, a 'Security Mode' help box lists options: Disable, WPA Personal, WPA Enterprise, WPA2 Personal, WPA2 Enterprise, RADIUS, and WEP. At the bottom are 'Save Settings' and 'Cancel Changes' buttons.

4.5.7.3 SETUP SOURCE CODE FOR WEP

After the AP is configured for WEP, user must program the development board to use WEP. Configure the following for WEP, and it is located in WF_Config.h. For more information, see [Figure 4-12](#).

- Set the encryption type to WEP-40 or WEP-104. Define MY_DEFAULT_WIFI_SECURITY_MODE to either WF_SECURITY_WEP_40 or WF_SECURITY_WEP_104
- Set the WEP phrase. Refer to MY_DEFAULT_WEP_KEYS_40 or MY_DEFAULT_WEP_KEYS_104.

FIGURE 4-12: SOURCE CODE FOR WEP SECURITY SETUP

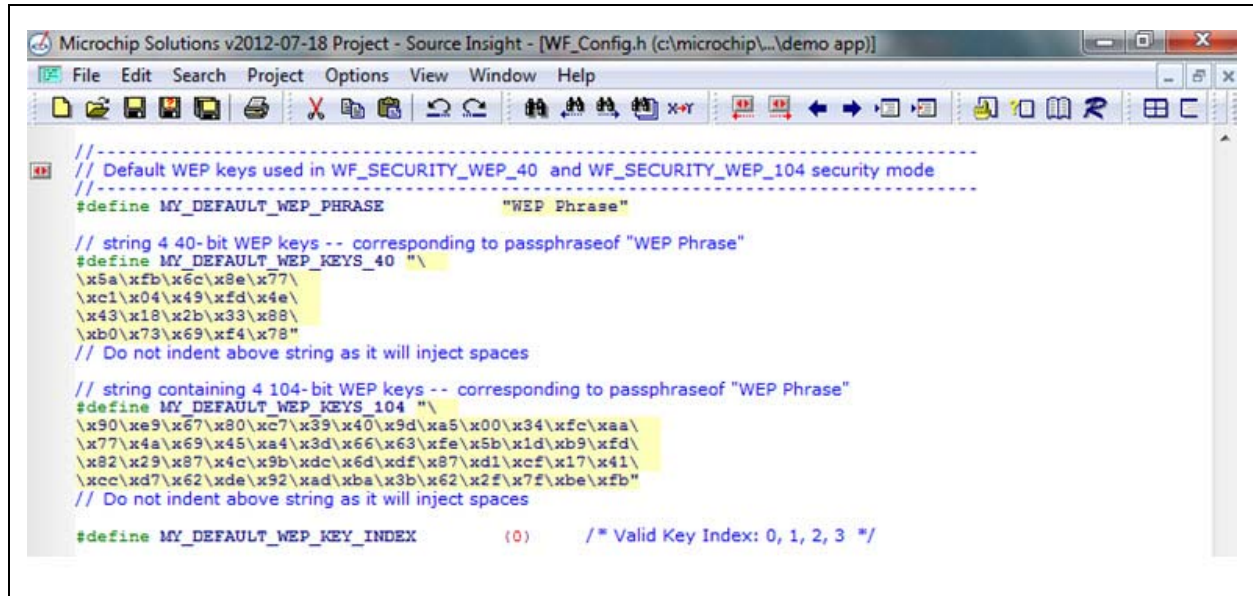

4.5.8 WPA/WPA2

WPA and WPA2 are security modes that implement the 802.11i specification. They are more secure than the WEP encrypted networks and utilizes the SSID and user passphrase to generate the PSK. The MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICTail™ has two methods of calculating the PSK for use in WPA/WPA2. Users can program the 32-byte hexadecimal key into the source code, or the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICTail™ can calculate the 32-byte hexadecimal key internally. If the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICTail™ has to calculate the key, this will add an additional 30 seconds to 45 seconds to the initial connection time, as the chip calculates the value.

4.5.8.1 TO SET UP AP FOR WPA/WPA2 PERSONAL

1. Login to the router, refer instructions in the [2.5 “Wireless Access Point \(AP\) Setup”](#).
2. Access the wireless security options by *Wireless>Wireless Security*. For WPA Personal, see [Figure 4-13](#). For WPA2 Personal, use WPA algorithm (AES) only see [Figure 4-14](#).
3. To match the default code in the hardware, set up the security as shown in [Figure 4-13](#) and [Figure 4-14](#).

FIGURE 4-13: WPA PERSONAL SECURITY SETUP

The screenshot shows the Linksys by Cisco Wireless Security setup page for a WRT54G2 router. The 'Security Mode' is set to 'WPA Personal'. The 'WPA Algorithms' dropdown is set to 'TKIP'. The 'WPA Shared Key' field contains the text 'Microchip 802.11 Secret PSK Password'. The 'Group Key Renewal' is set to '3600' seconds. A red arrow points to the 'WPA Shared Key' field with a note: 'Note that the full key should read: Microchip 802.11 Secret PSK Password. Also note that spacing and case-sensitivity are important!!'. On the right, a 'Security Mode' information box lists available modes: Disable, WPA Personal, WPA Enterprise, WPA2 Personal, WPA2 Enterprise, RADIUS, and WEP. The bottom of the page has 'Save Settings' and 'Cancel Changes' buttons.

FIGURE 4-14: WPA2 PERSONAL AES SECURITY SETUP

The screenshot shows the Linksys by Cisco Wireless Security setup page for a WRT54G2 router. The 'Security Mode' is set to 'WPA2 Personal'. The 'WPA Algorithms' dropdown is set to 'AES'. The 'WPA Shared Key' field contains the text 'Microchip 802.11 Secret PSK Password'. The 'Group Key Renewal' is set to '3600' seconds. A red arrow points to the 'WPA Shared Key' field with a note: 'Note that the full key should read: Microchip 802.11 Secret PSK Password. Also note that spacing and case-sensitivity are important!!'. On the right, a 'Security Mode' information box lists available modes: Disable, WPA Personal, WPA Enterprise, WPA2 Personal, WPA2 Enterprise, RADIUS, and WEP. The bottom of the page has 'Save Settings' and 'Cancel Changes' buttons.

4.5.9 Setup Source Code for WPA/WPA2

The MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ has the following two approaches to run WPA/WPA2 security:

- On-the-fly PSK Calculation - The straight forward approach to supply the passphrase. The PIC18/24/32 or PICtail will calculate the PSK based on the SSID and the supplied passphrase. Due to the computationally intensive nature of this operation, this will take approximately 30 seconds to 45 seconds to complete.
- Pre generated PSK - This approach is to provide the 32 byte PSK, and user can directly plug this value into the source code.

The following section describes setting up and using both the preceding approaches:

4.5.9.1 ON-THE-FLY PSK CALCULATION

Only two pieces of information required to enable the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ to calculate the PSK and use that for the encryption process, see [Figure 4-15](#).

Define MY_DEFAULT_WIFI_SECURITY_MODE to be
WF_SECURITY_WPA_WITH_PASS_PHRASE or
WF_SECURITY_WPA2_WITH_PASS_PHRASE.

Define MY_DEFAULT_PSK_PHRASE.


FIGURE 4-15: SOURCE CODE CALCULATE PSK SETUP

```
// Default pass phrase used for WF_SECURITY_WPA_WITH_PASS_PHRASE and
// WF_SECURITY_WPA2_WITH_PASS_PHRASE security modes
#define MY_DEFAULT_PSK_PHRASE "Microchip 802.11 Secret PSK Password"
```

Note that passphrase is case sensitive and spacing does matter.

4.5.9.2 PRE GENERATED PSK

Users can pre generate the PSK and use 32 byte PSK in the source code. The handy tool to generate the PSK is available online at the Wireshark Foundation (see [Appendix A.4](#)). The Wireshark web site can generate the expected 32 byte PSK key with the SSID name and the passphrase. Use these values in the variable MY_DEFAULT_PSK in WF_Config.h. For more information, see [Figure 4-16](#).

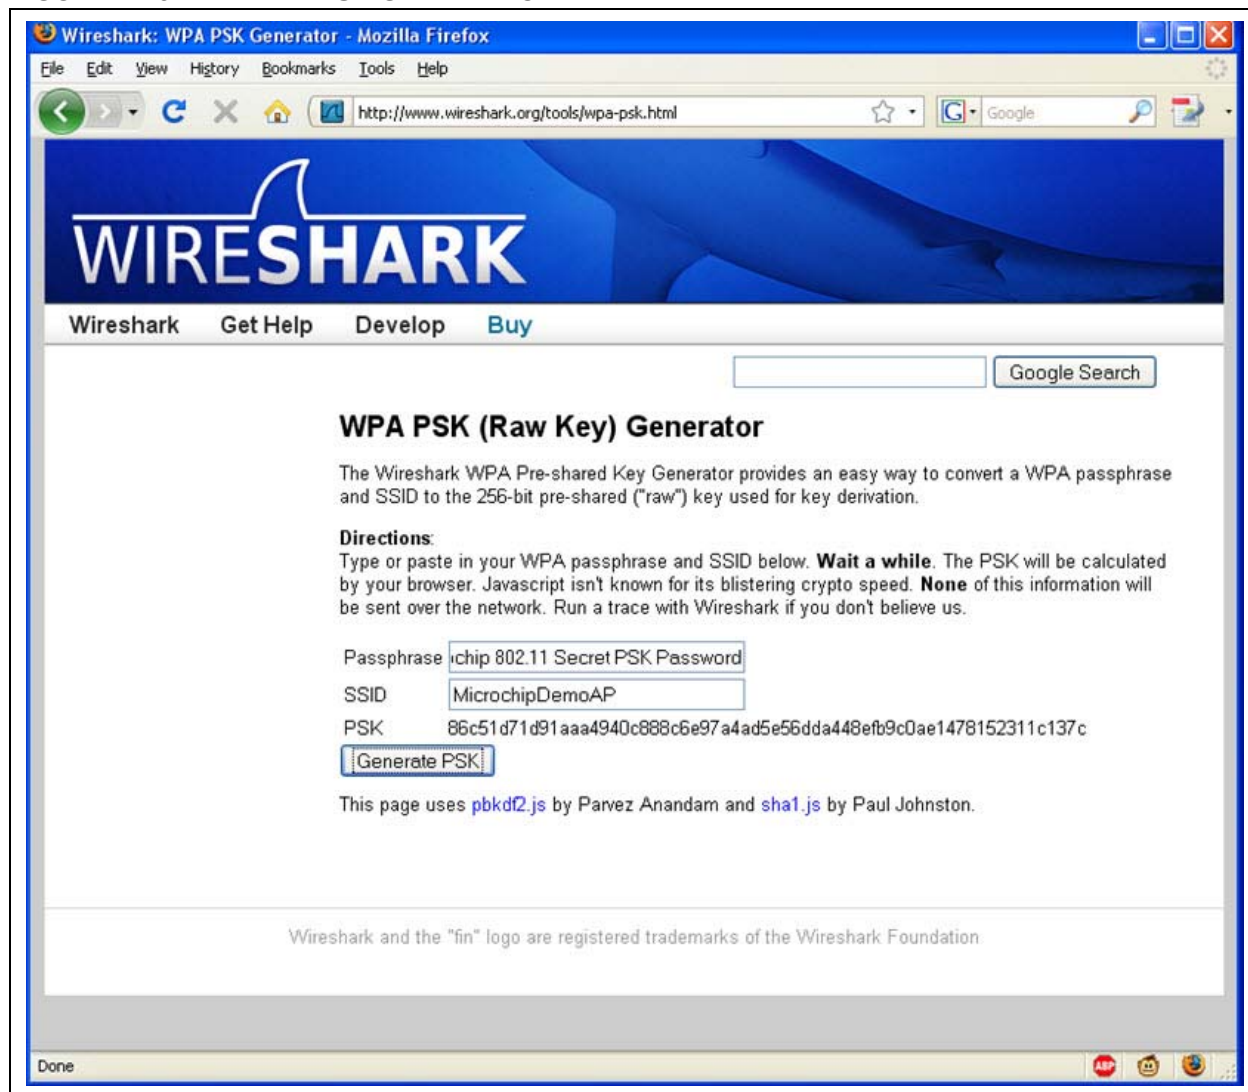
FIGURE 4-16: WPA PSK GENERATION

Sample Application Demonstrations

4.6 COMPILING AND DOWNLOADING IMAGES


1. From the left pane, under **Device** select appropriate Compiler development board PICtail combination and PIC microprocessor, see [Figure 4-17](#).

FIGURE 4-17: PIC MICROPROCESSOR AND COMPILER-DEVELOPMENT BOARD-PICTAIL COMBINATION

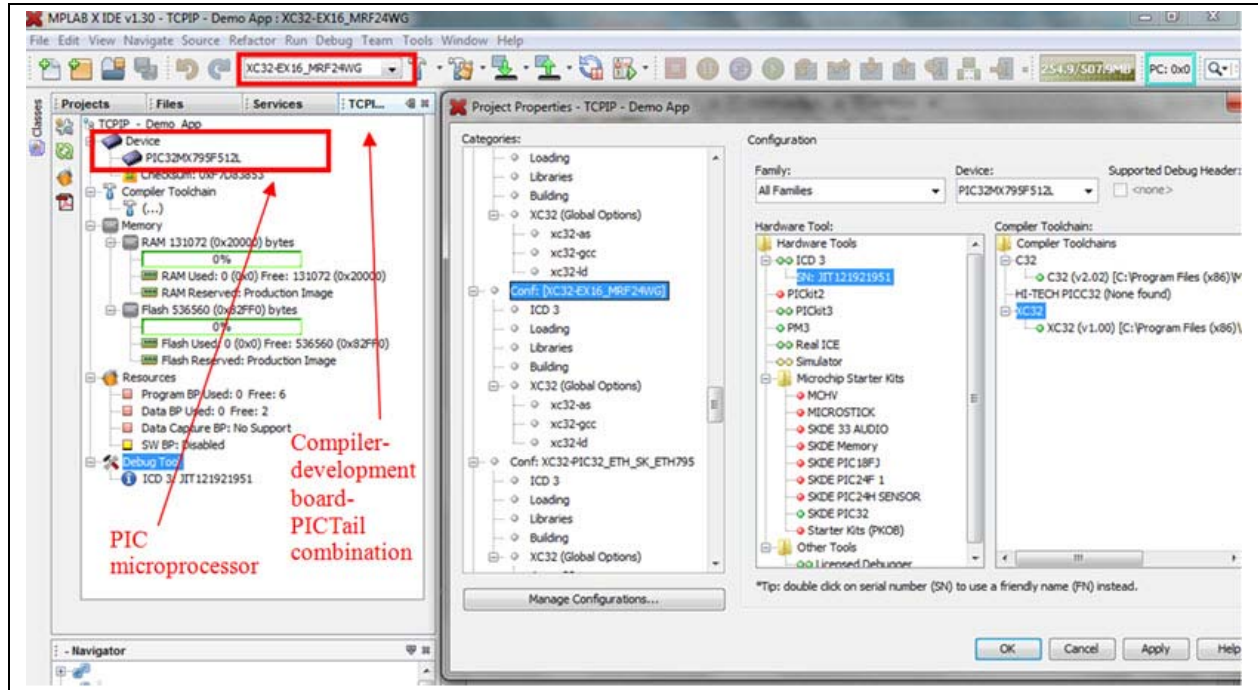


2. To change the device type, click **Project Properties**, see [Figure 4-18](#). The Project Properties sub panel is displayed.

FIGURE 4-18: PROJECT PROPERTIES ICON

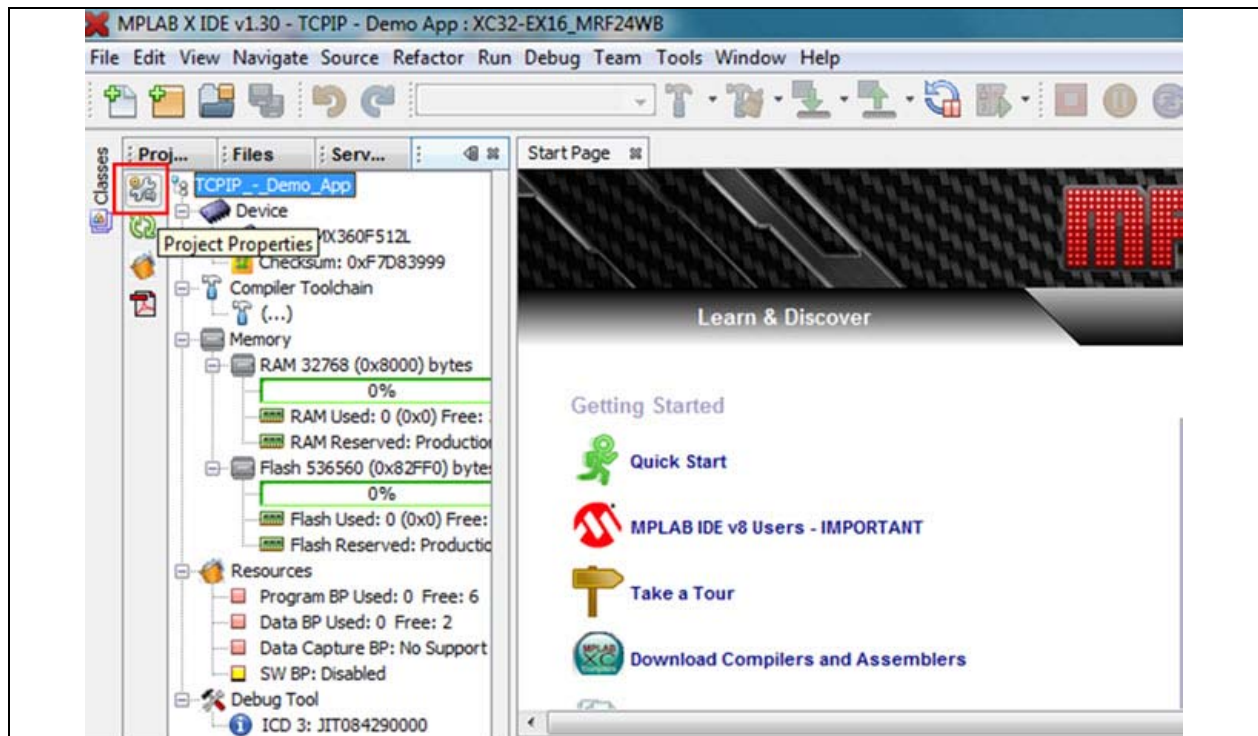

3. Select the device type, as shown in Figure 4-19.


FIGURE 4-19: CHANGE DEVICE TYPE

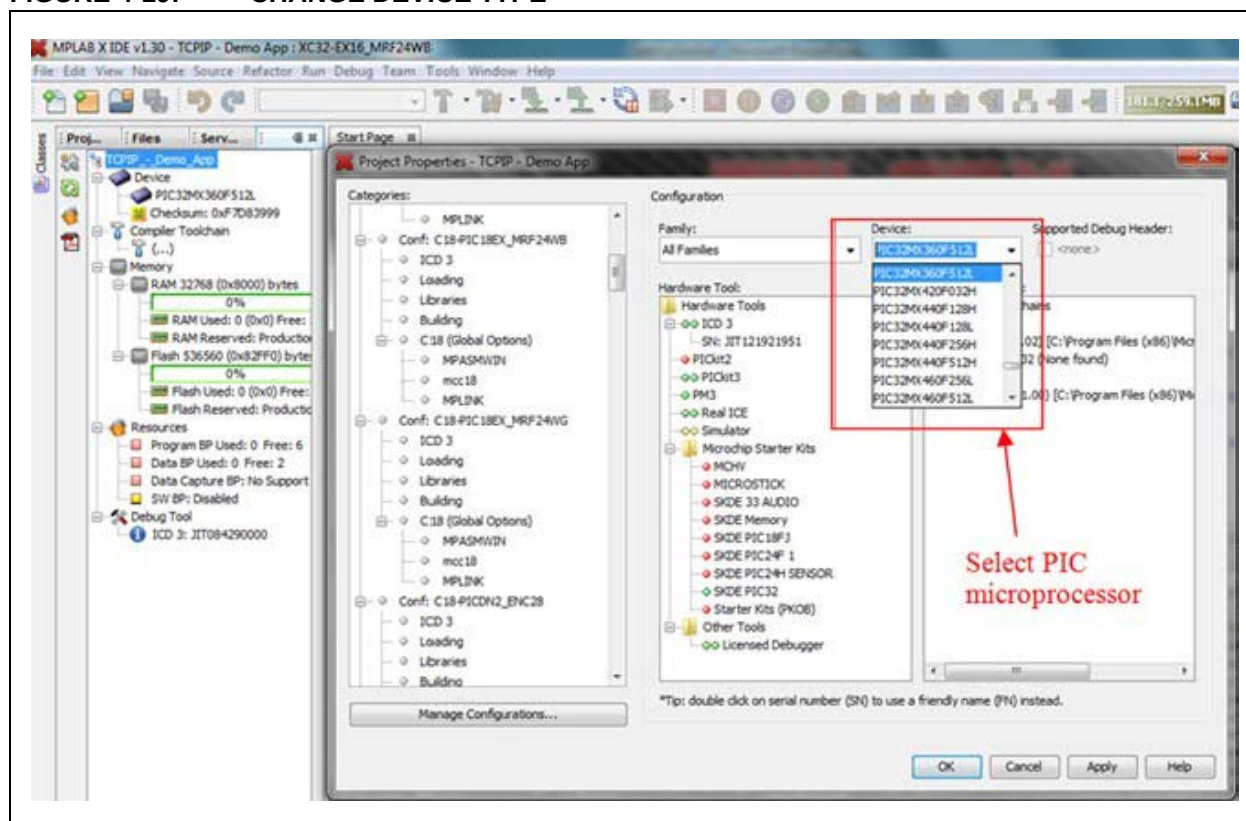

4. Click **Debug** menu and select Debug Project command to compile, build, connect to the ICD, detect the target device, program the target device and run, see Figure 4-20.


Sample Application Demonstrations

FIGURE 4-20: DEBUG PROJECT

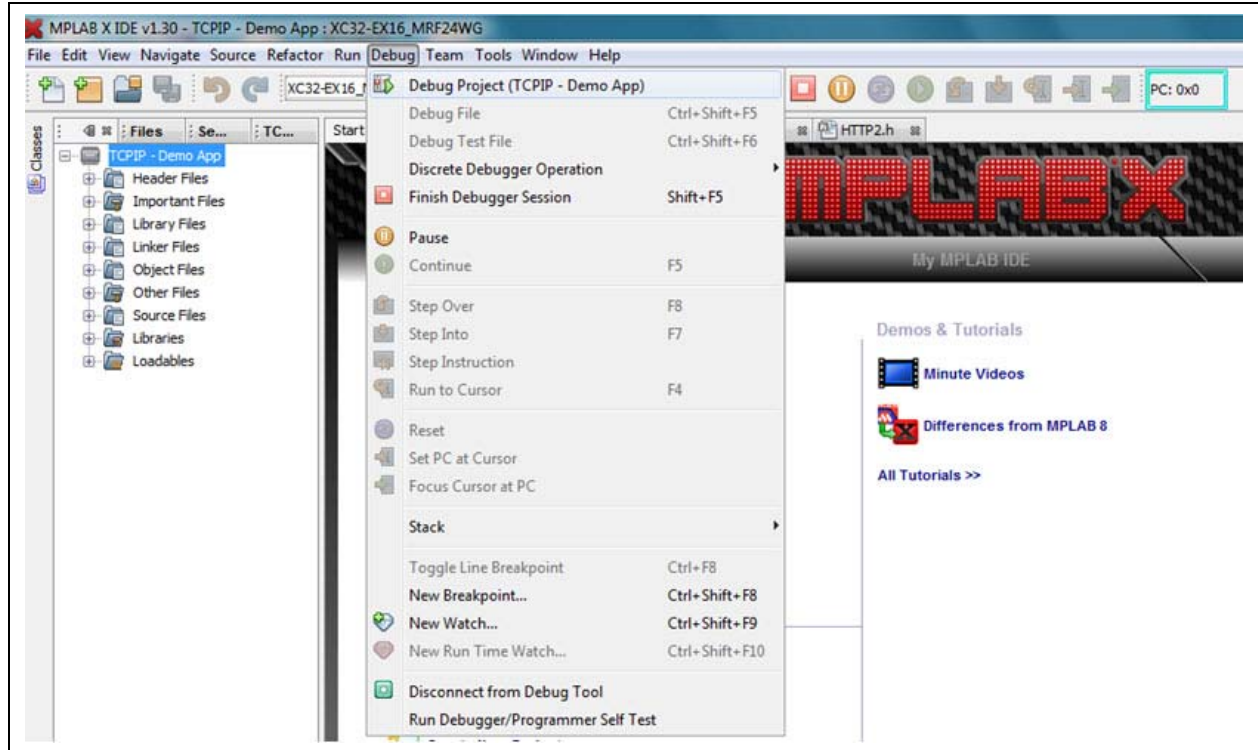


5. Monitor the **Demo App (Build, Load, ...)** tab under the Output window in the MPLAB X IDE to view compiler errors or warnings. When the compilation has completed and built correctly, the output is shown in Figure 4-21.

FIGURE 4-21: BUILD SUCCESSFUL. LOADING COMPLETED.

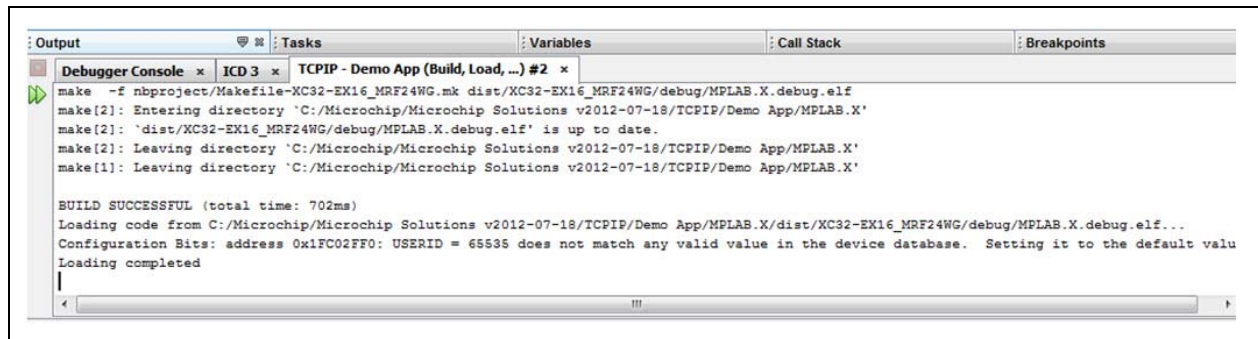

6. Monitor the **ICD3** tab under the Output window in MPLAB X IDE to view the target being detected and programmed, the output is shown in Figure 4-22.

FIGURE 4-22: SUCCESSFUL PROGRAMMING

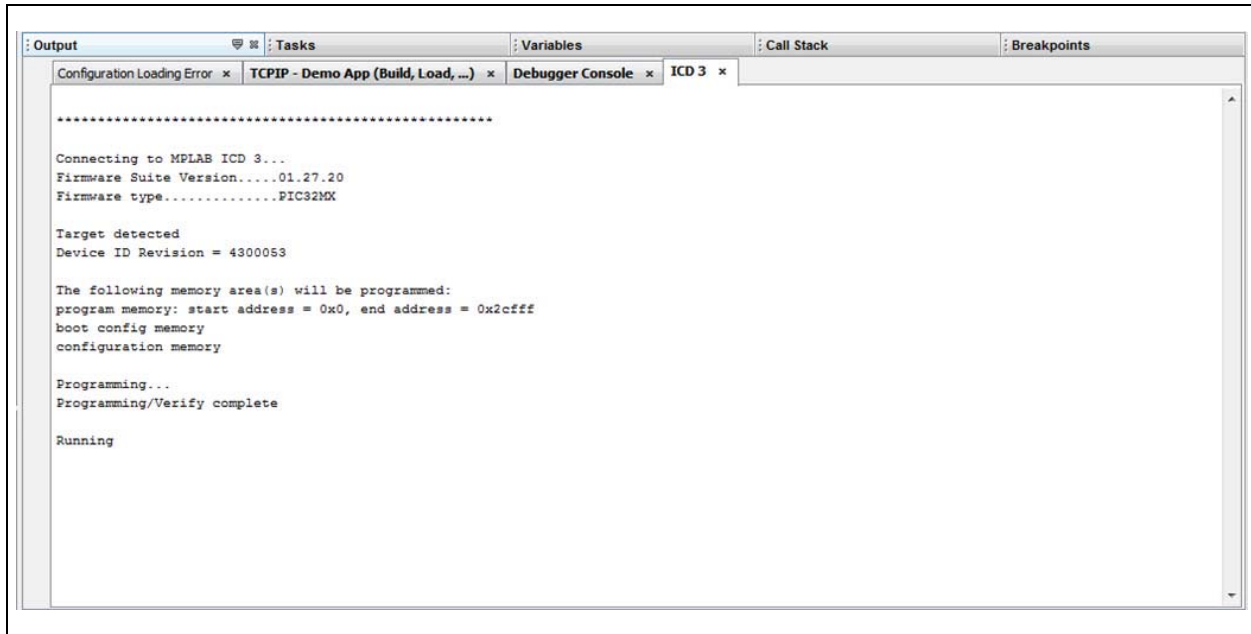

4.7 RUNNING TCP/IP – DEMO APP

This is applicable only for Explorer 16 and PICDEM.net2 Development Boards as the PIC32 starter kit does not use the EEPROM. Due to this, you may notice situations where you have made changes in the code that are not reflected during the demonstration (for example, you changed the SSID name, but do not see it is being used), and user must erase the EEPROM, refer to [5.3 “Erasing EEPROM”](#).


For the first time demonstration, perform these actions. The user must setup hardware and software before the WiFi demonstration.

1. Download web server code into the EEPROM of the development board. To download web server code, from the browser navigate to a special page that will allow you to upload image files. More information on uploading image files are provided in the later section. It is recommended to define MY_DEFAULT_WIFI_SECURITY_MODE as WF_SECURITY_OPEN.
2. After the development board is connected to the AP (or it has created the network in Ad hoc mode), the LCD panel will display the IP address that is being used. Alternately, the serial output should display the same information.

4.7.1 Network Type: CFG_WF_INFRASTRUCTURE


1. CFG_WF_INFRASTRUCTURE is the default network type with the MLA release. Ensure that SSID and Security mode is set to match with the APs configurations. In the WF_Config.h, perform these actions:
 - a) Define the MY_DEFAULT_NETWORK_TYPE as CFG_WF_INFRASTRUCTURE.
 - b) Define the MY_DEFAULT_WIFI_SECURITY_MODE as WF_SECURITY_OPEN.
 - c) Define the MY_DEFAULT_SSID_NAME to be same as the AP or router's SSID.

FIGURE 4-23: INFRASTRUCTURE NETWORK ENVIRONMENT SETUP

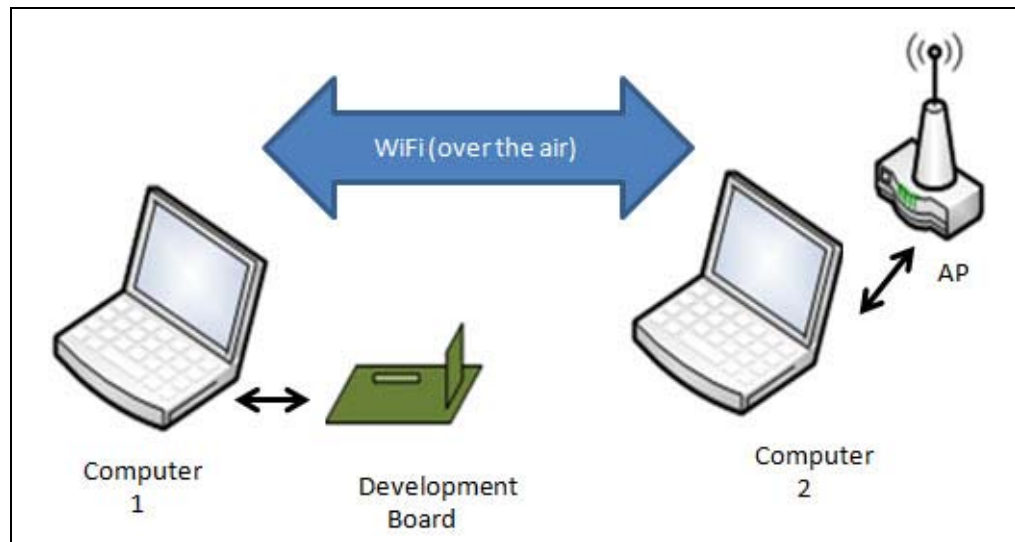

2. After the development board is connected to the AP, the LCD panel displays the IP address that is being used. Alternately, the serial output should display similar informations, see [Figure 4-24](#).


FIGURE 4-24: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: INFRASTRUCTURE NETWORK TYPE

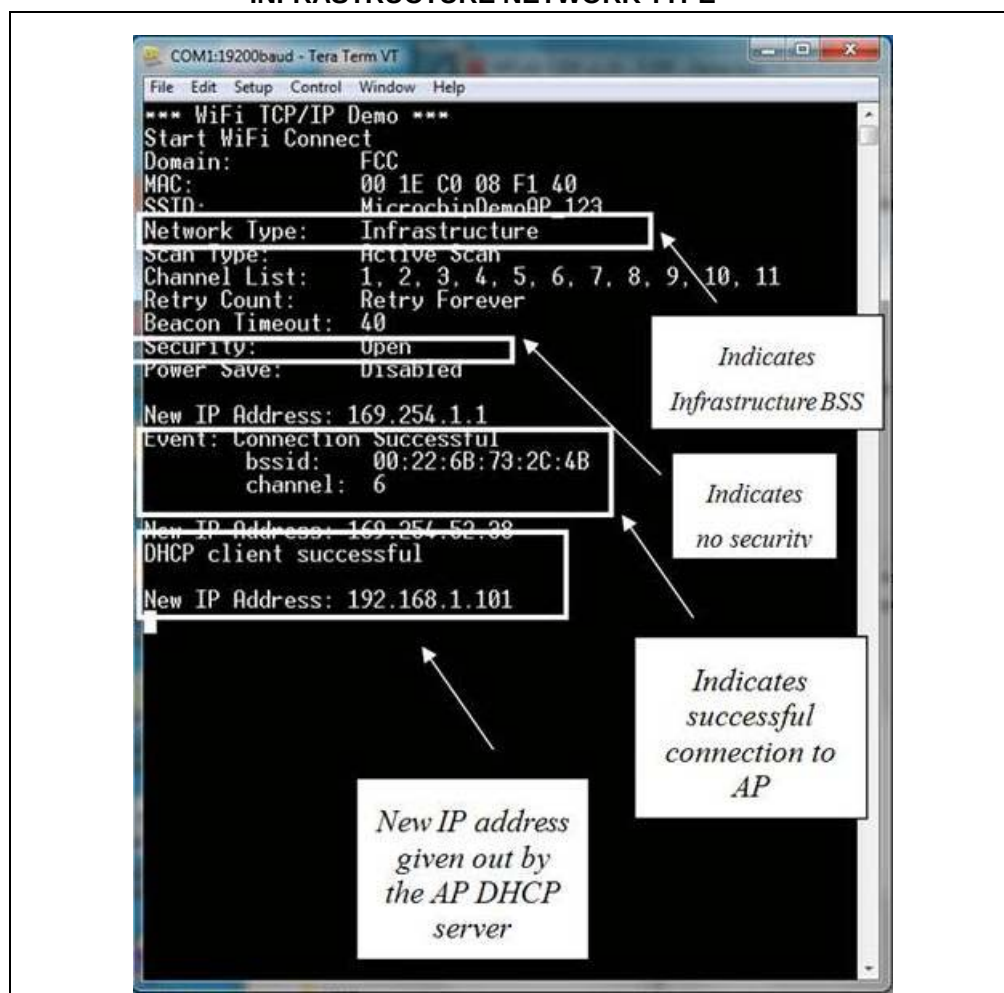

3. Navigate to the upload page of the development board. On computer 2s web browser, type <http://xxx.xxx.xxx.xxx/mpfsupload>, where xxx.xxx.xxx.xxx is the IP address of the development board, see Figure 4-25.

Note: This is only required for the PICDEM.net 2 and the Explorer 16 Development Board. Starter kits do not have the EEPROM, and their image is compiled into program Flash memory.


FIGURE 4-25: WEB SERVER IMAGE UPLOAD (COMPUTER 2)

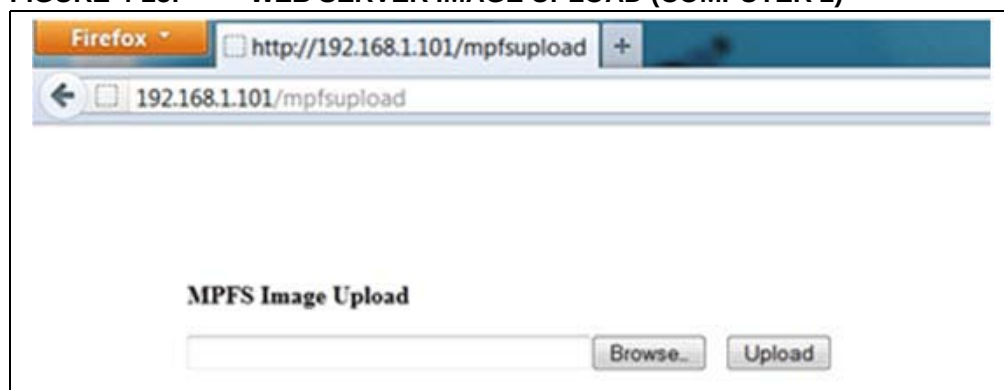

Sample Application Demonstrations


4. Click **Browse** button to upload the MPFSImg2.bin file, and this file is located in the root directory of the TCPIP-Demo App directory. If all the softwares are installed in the default location, the directory path will be C:\Microchip Solutions \yyyy-mm-dd\TCPIP\Demo App\.
5. Open the MPFSImg2.bin file and click **Upload** button to upload the file.
6. After the successful uploading, "MPFS Update Successful" message will be displayed, see [Figure 4-26](#).

FIGURE 4-26: WEB SERVER IMAGE UPLOAD SUCCESSFUL (COMPUTER 2)

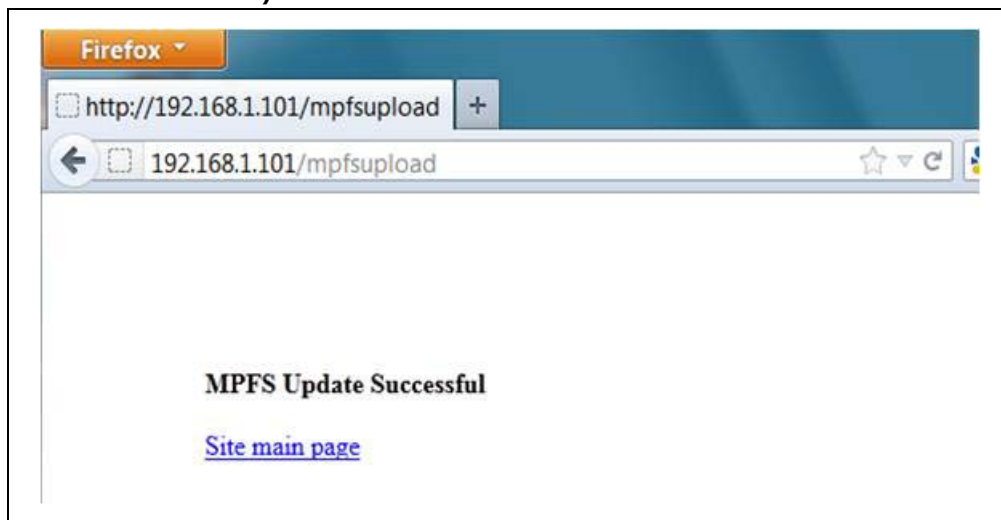

7. Click **Site main page** link to navigate to the main page of the web server, see [Figure 4-27](#).

FIGURE 4-27: TCPIP – DEMO APPLICATION (COMPUTER 2)

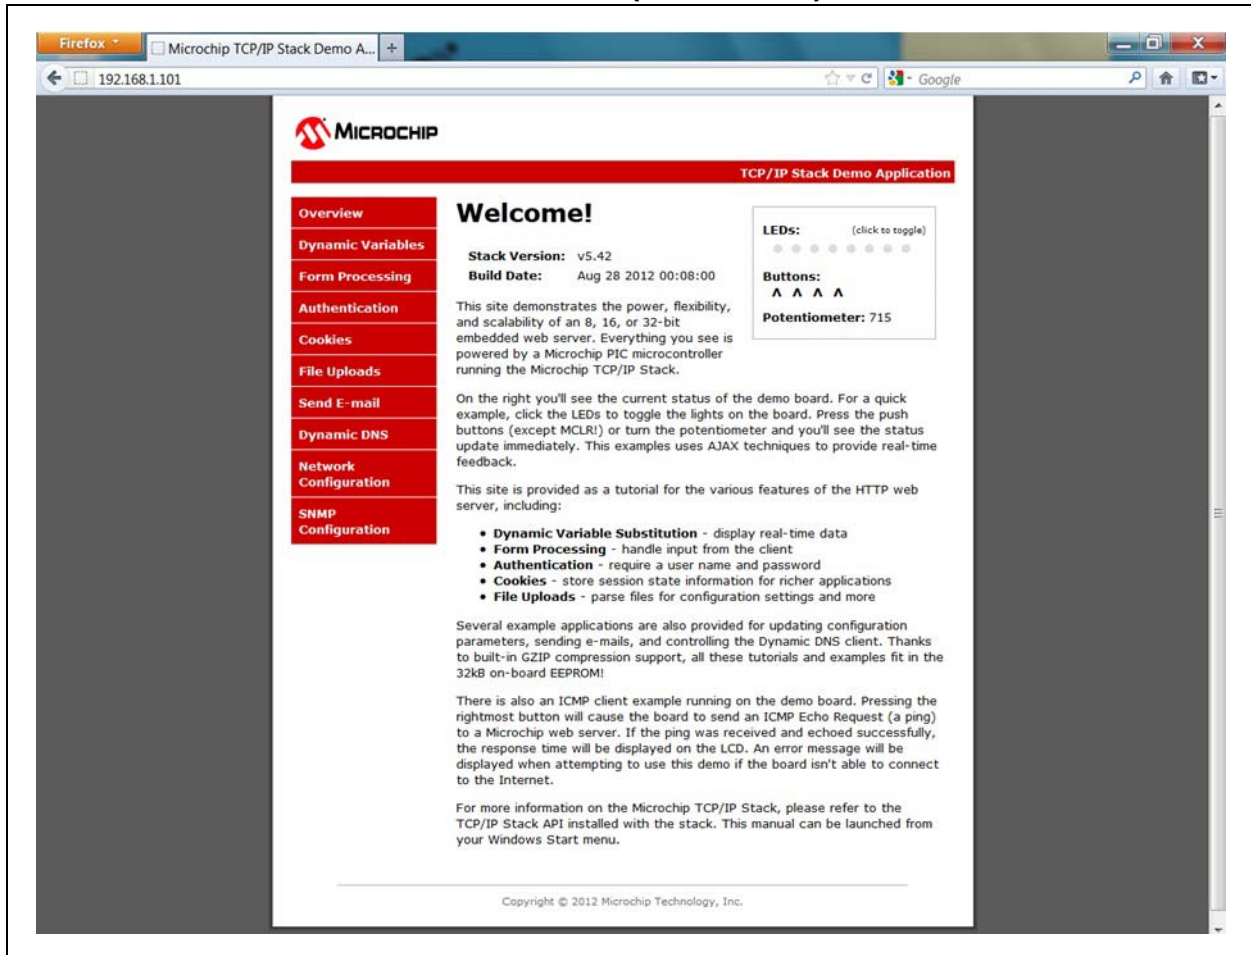

8. The TCP/IP WiFi demonstration application enable users to understand features and applications that are available with the Microchip TCP/IP stack, and how it can be used on wireless medium. From the web main page, user can interact with the development board hardware to toggle LEDs, push buttons and change potentiometer values. For example, from the Form Processing page, user can select the LEDs to be turned ON or OFF by clicking **Save** button.
9. On the LCD, enter "Test 1 2 3 4 5" and click **Save** button. The respective LEDs on the development board being configured as programmed and the LCD on the development board displays "Test 1 2 3 4 5", see [Figure 4-28](#) and [Figure 4-29](#).

Sample Application Demonstrations

FIGURE 4-28: TCPIP – DEMO APPLICATION: TOGGLING LEDS AND LCD (COMPUTER 2)


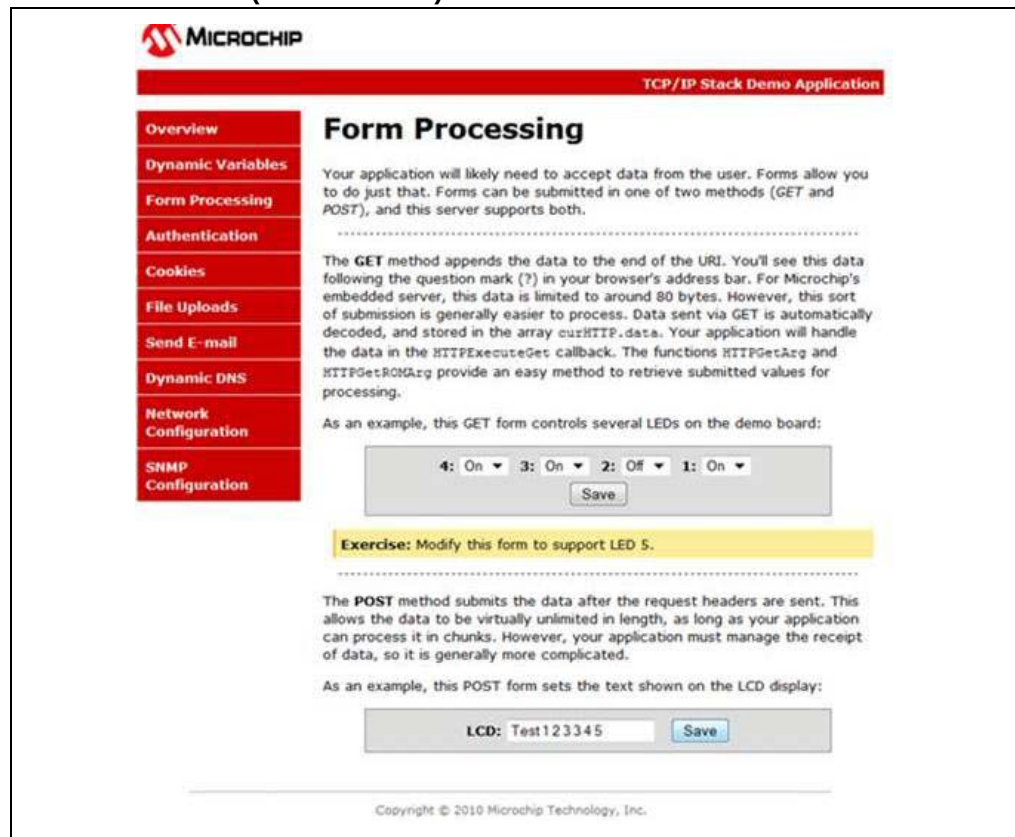


FIGURE 4-29: TCPIP – DEMO APPLICATION: LEDS AND LCD ON DEVELOPMENT BOARD

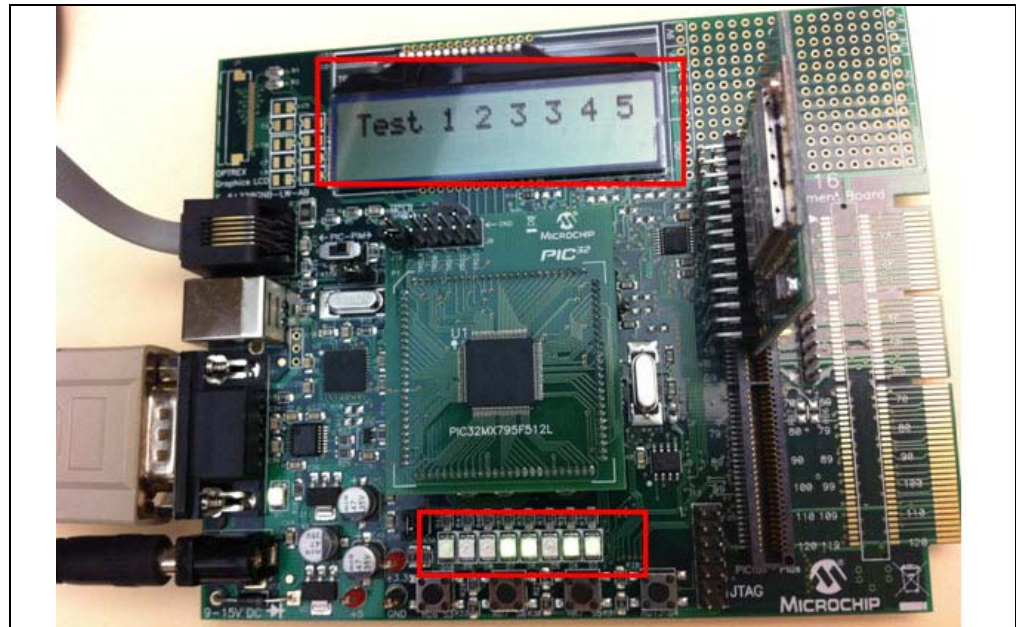

10. Other web pages of the demonstration allow you to send e-mails, upload files and change network configuration values. Refer to the Microchip TCP/IP Stack Help.chm document that is part of the TCP/IP Stack source code release.


4.7.2 Network Type: CFG_WF_ADHOC

The security mode supported by MRF24WB0MA/B and MRF24WG0MA/B is Open mode and WEP security. In the following example, open security is used.

In the WF_Config.h file, perform these actions:

1. Define the MY_DEFAULT_NETWORK_TYPE as CFG_WF_ADHOC.
2. Ensure that the MY_DEFAULT_SSID_NAME is defined to be unique and different from the SSID name used in the CFG_WF_INFRASTRUCTURE. For example, MY_DEFAULT_SSID_NAME is defined as Adhoc_MCHPDemoAP_123.

FIGURE 4-30: AD HOC NETWORK ENVIRONMENT SETUP

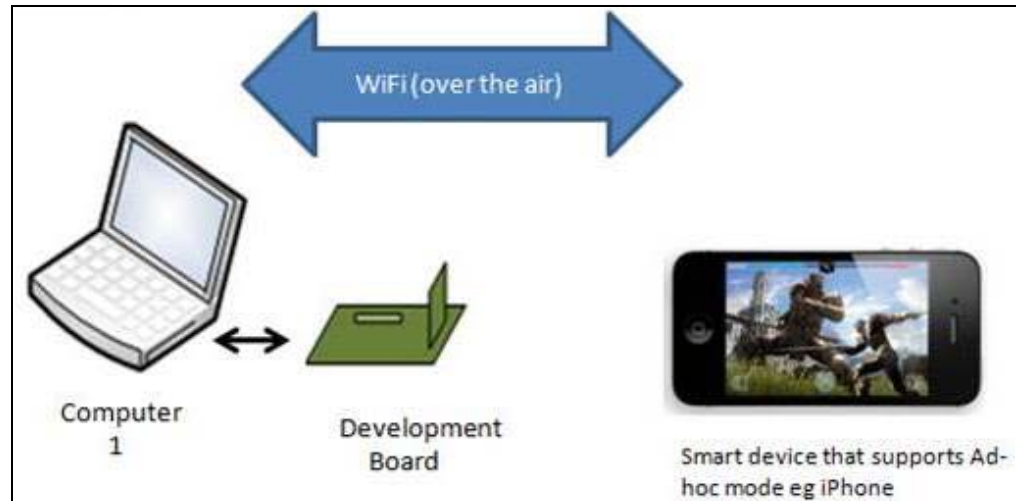


Note: In this demonstration, iPhone is used as the smart device. Alternatives can be used instead of the iPhone, such as laptop with wireless network adapter.

3. MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ is the first station to broadcast the message to create the network. After successful creation of the network, connection successful message will be displayed, see [Figure 4-31](#).


Sample Application Demonstrations

FIGURE 4-31: DEVELOPMENT BOARD SERIAL DISPLAY: AD HOC NETWORK TYPE

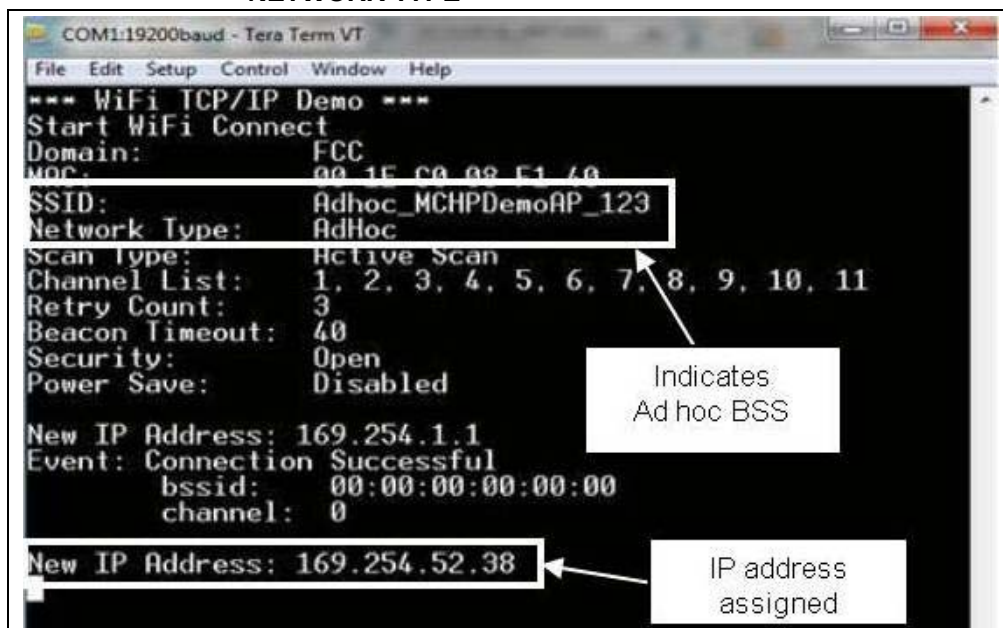

4. After the development board is connected to another device, the LCD panel will display new IP address, see [Figure 4-32](#). Alternately, the serial output also displays similar information, see [Figure 4-31](#).

FIGURE 4-32: TCP/IP – DEMO APPLICATION: LEDS AND LCD ON DEVELOPMENT BOARD

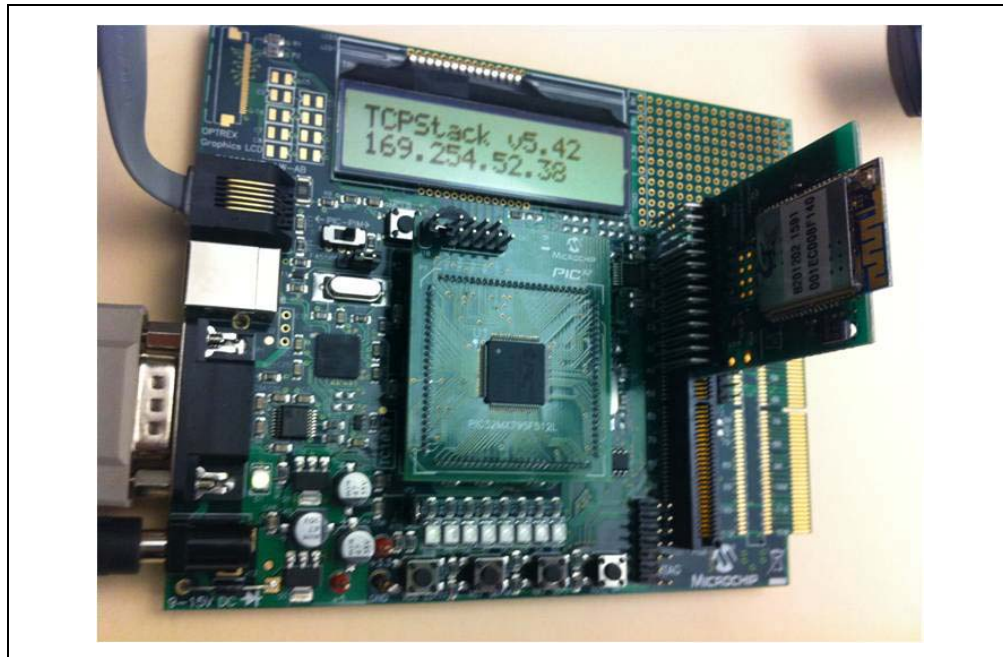

5. On the smart device, select the menu settings to view the WiFi networks detected, see [Figure 4-33](#).

FIGURE 4-33: WIFI NETWORKS DETECTED ON SMART DEVICE



6. Click on the ad hoc network SSID to connect to this ad hoc network, as shown in [Figure 4-34](#).


FIGURE 4-34: SELECT AD HOC NETWORK ON SMART DEVICE



Sample Application Demonstrations

- After connection to this ad hoc network is established, user can enter IP address of the ad hoc network (for example, 169.254.52.38) on the smart device's web browser. The demonstration is similar to the infrastructure network type. For example, when user presses any of the buttons (S1 through S4) on the development board, the web page will display the same buttons being pressed, see Figure 4-35.

FIGURE 4-35: WEB BROWSER ON SMART DEVICE (AD HOC BSS)

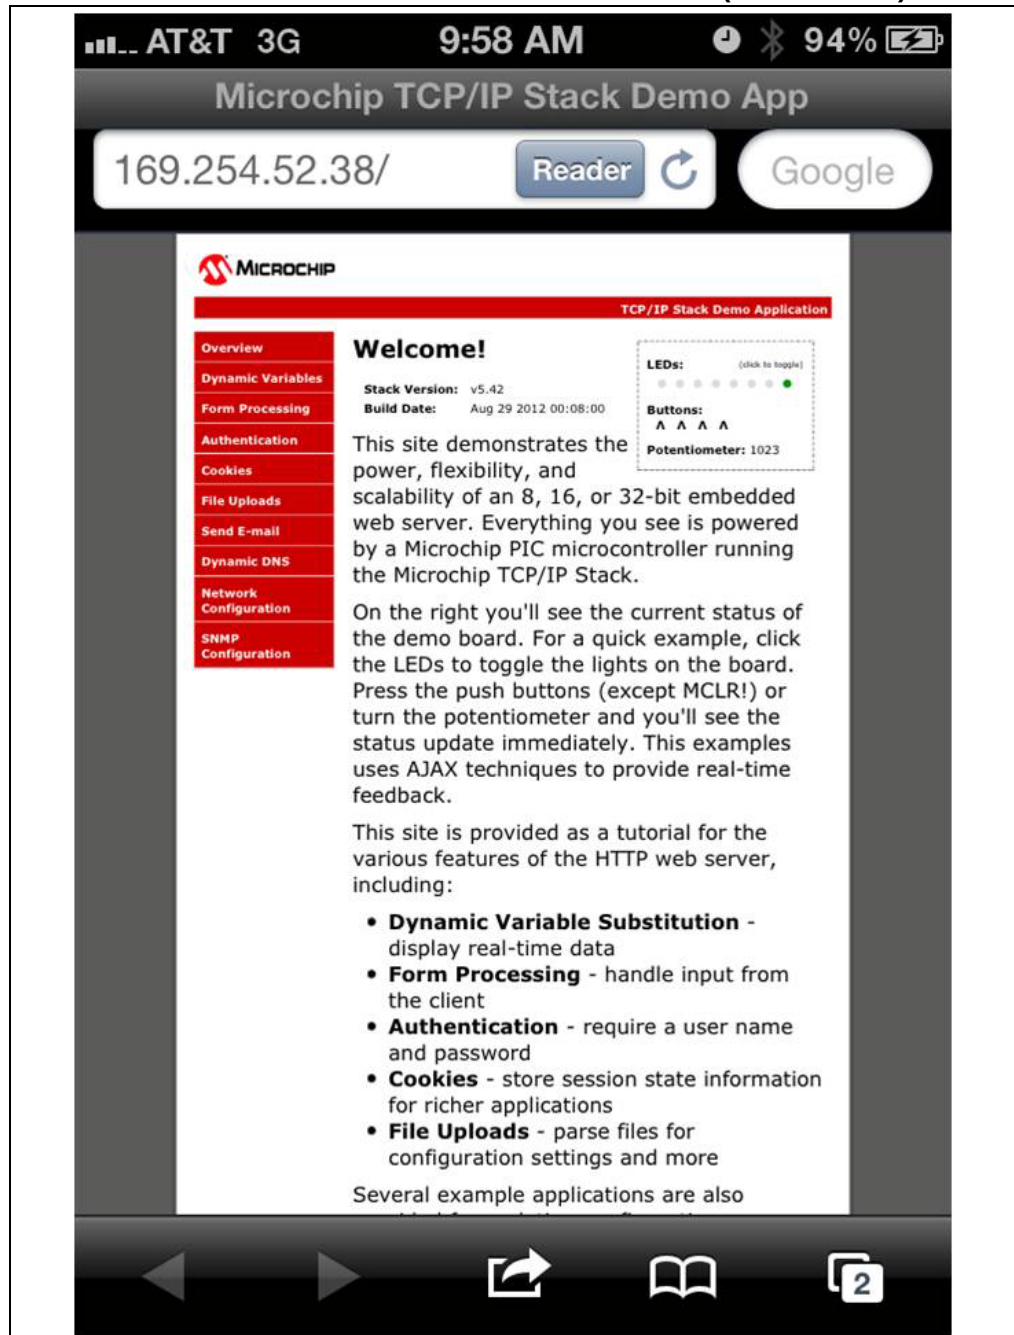

4.7.3 Network Type: CFG_WF_P2P

WiFi Direct (peer-to-peer (P2P)) network type is only applicable for 802.11g hence specific to MRF24WG0MA/B modules. The Samsung Galaxy tablet is used in this demonstration. [Figure 4-36](#) illustrates the WiFi Direct environment setup.

FIGURE 4-36: WIFI DIRECT ENVIRONMENT SETUP



The implementation is restricted to the role of group client (GC) only.

In the `WF_Config.h` file, perform these actions:


1. Define the `MY_DEFAULT_NETWORK_TYPE` as `CFG_WF_P2P`.
2. Allow the `MY_DEFAULT_WIFI_SECURITY_MODE` as default (that is, `WF_SECURITY_WPS_PUSH_BUTTON`).
3. Allow the `MY_DEFAULT_SSID_NAME` as default (that is, `DIRECT-`), which is a unique and specified identifier to identify a WiFi Direct network.
4. Allow the `MY_DEFAULT_CHANNEL_LIST` as default (that is, `{1, 6, 11}`), which are the specified channels to be used in the WiFi Direct network.

Note: Specific smart devices may have a de facto security mode such as WPS Push button, and may not prompt for a push button entry.

5. After the development board is powered up and running, the serial output is displayed as shown in [Figure 4-37](#).


Sample Application Demonstrations

FIGURE 4-37: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: WIFI DIRECT NETWORK TYPE

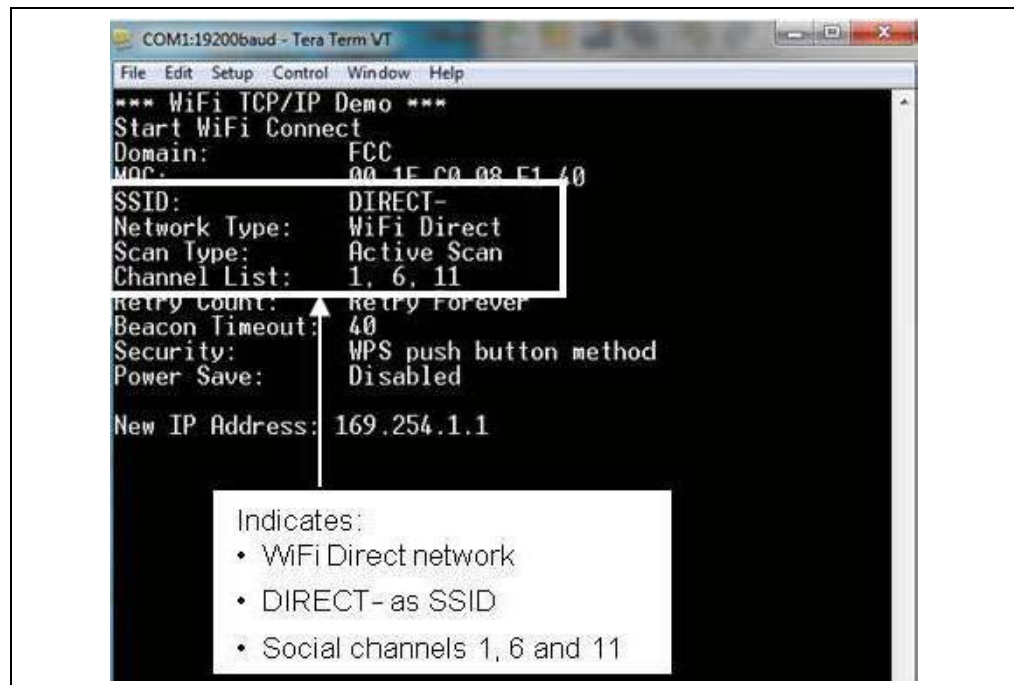

6. On the smart device, enable WiFi Direct mode, see [Figure 4-38](#).

FIGURE 4-38: SMART DEVICE WIFI DIRECT MODE ENABLED

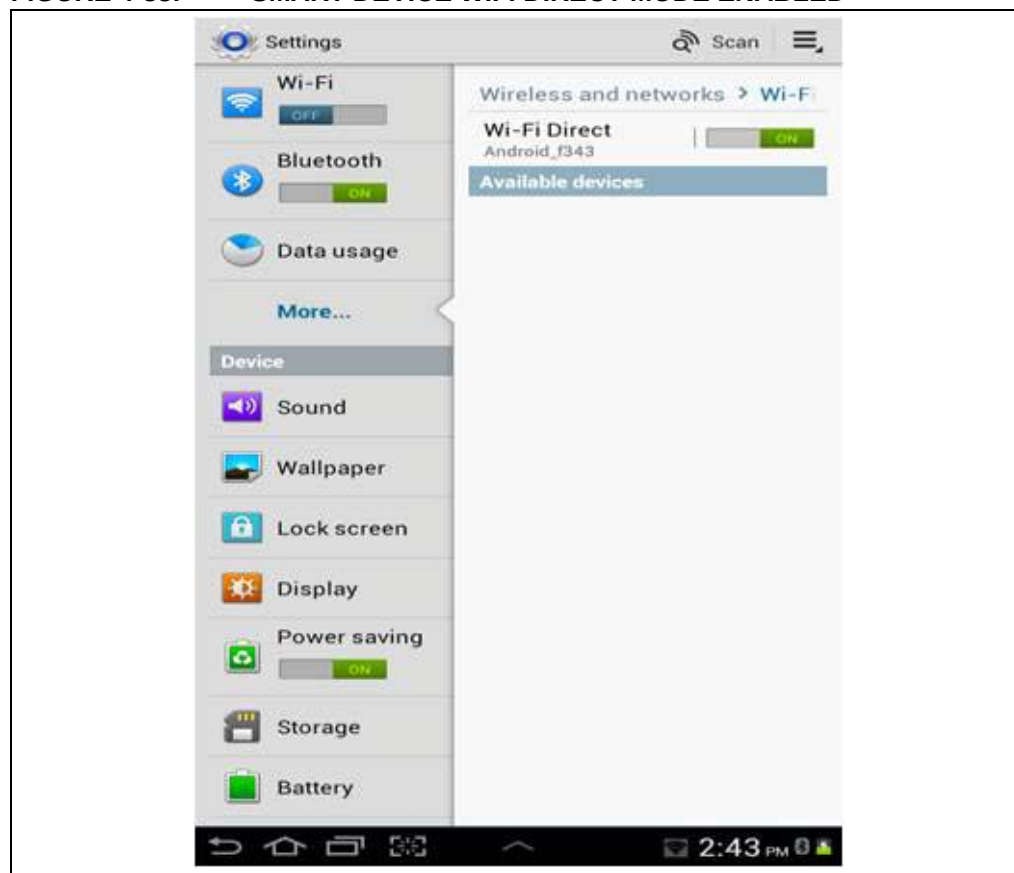


- The smart device will prompt a message to Accept or Decline the device. Click to accept the connection request, see [Figure 4-39](#).

FIGURE 4-39: SMART DEVICE PROMPT TO ACCEPT OR REJECT CONNECTION REQUEST



- The development board will display the successful connection status, as shown in [Figure 4-40](#).


FIGURE 4-40: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: WIFI DIRECT CONNECTION STATUS

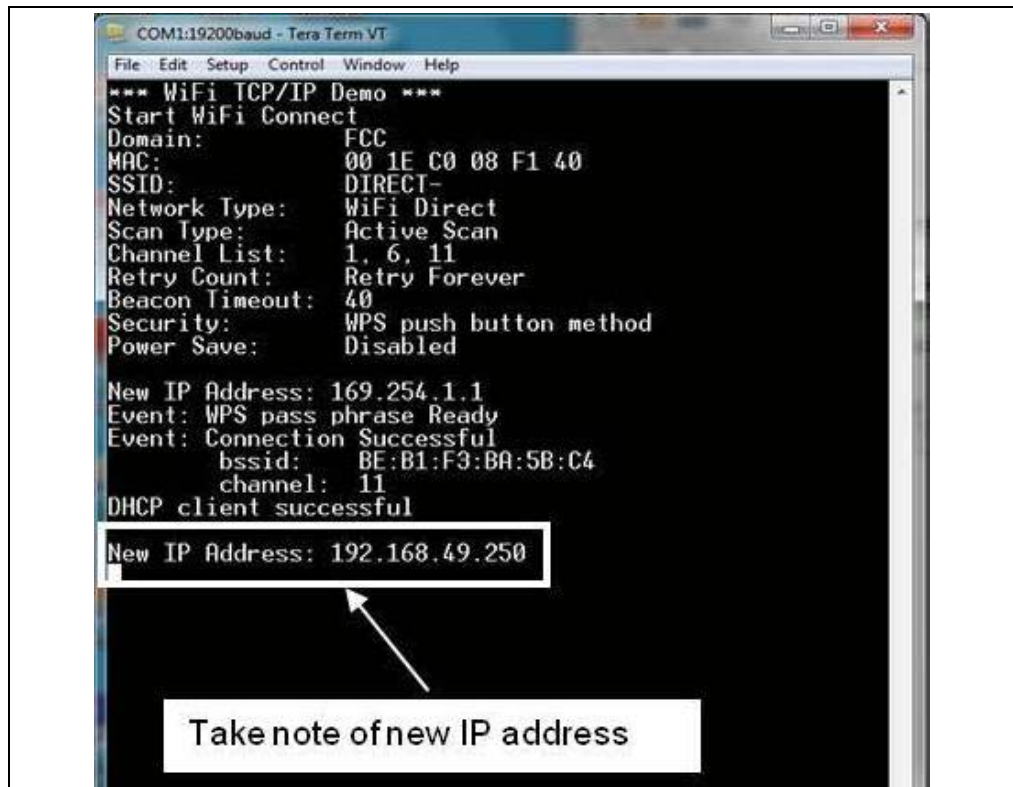

- After connection to this WiFi Direct network is established, users can enter the Wi-Fi Direct network IP address (for example, 192.168.49.250) on the smart device's web browser. The demonstration is similar to the Infrastructure Network type, see [Figure 4-41](#).

Sample Application Demonstrations


FIGURE 4-41: WEB BROWSER ON SMART DEVICE (WIFI DIRECT NETWORK)

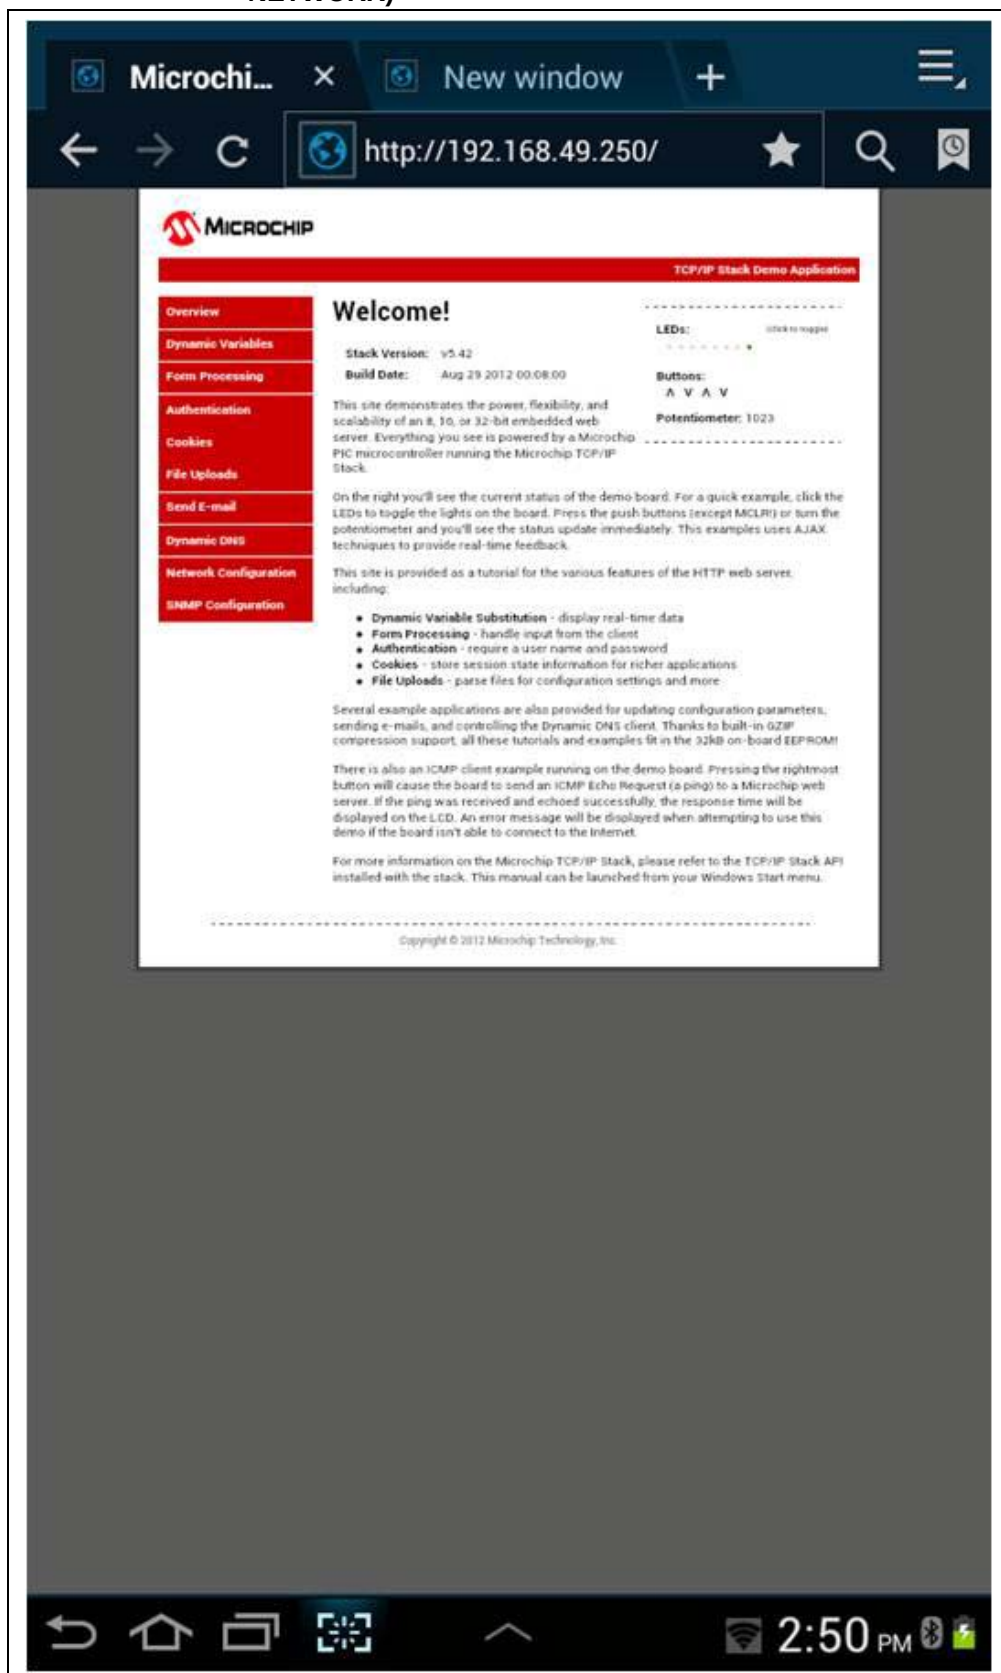

4.7.4 WPS Connection Method

An AP that supports WPS is used in this demonstration. [Figure 4-42](#) illustrates the WPS environment setup.

FIGURE 4-42: WPS ENVIRONMENT SETUP

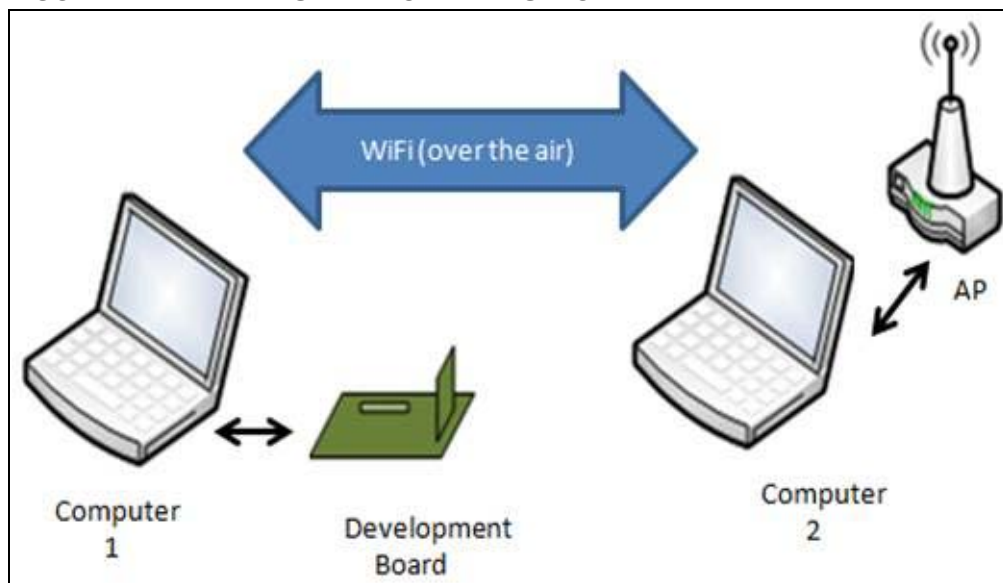


4.7.4.1 WPS METHOD: WF_SECURITY_WPS_PUSH_BUTTON

In the `WF_Config.h` file, perform these actions:

1. Define the `MY_DEFAULT_NETWORK_TYPE` as `CFG_WF_INFRASTRUCTURE`.
2. Define the `MY_DEFAULT_WIFI_SECURITY_MODE` as `WF_SECURITY_WPS_PUSH_BUTTON`.
3. Define the `MY_DEFAULT_SSID_NAME` as "".
4. After the development board is powered up and running, the serial output displays the message shown in [Figure 4-43](#).

Sample Application Demonstrations


FIGURE 4-43: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: WPS PUSH BUTTON

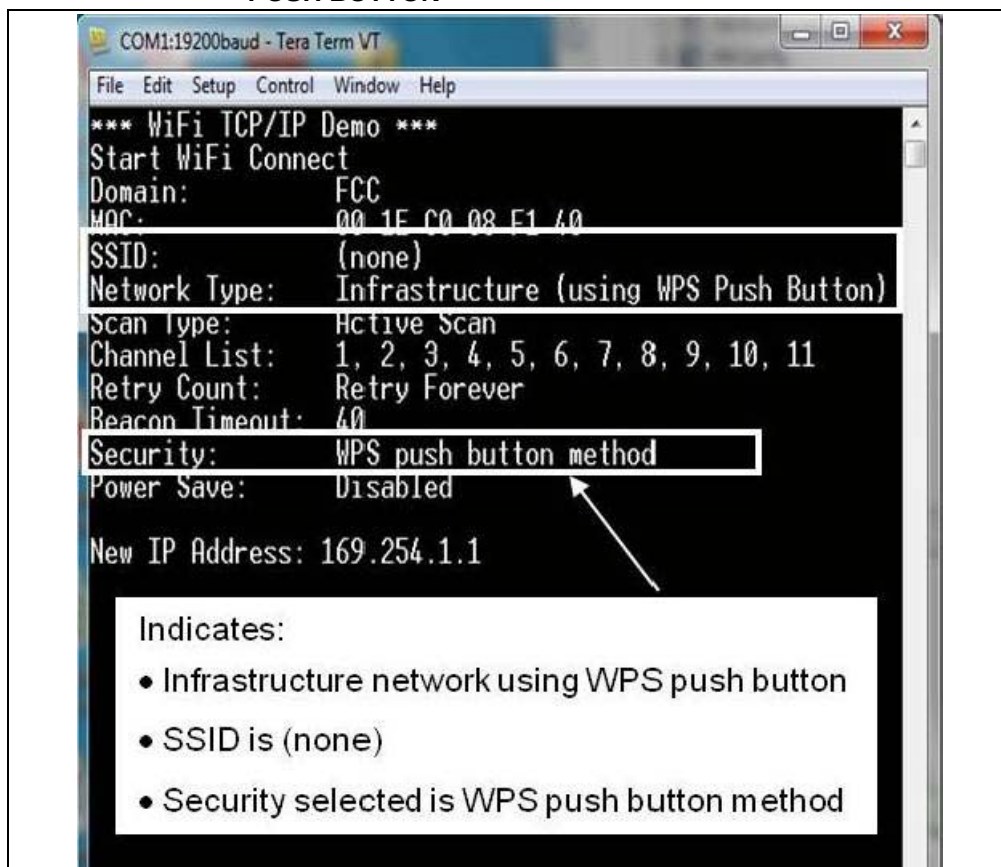

Note: The development board with the MRF24WG0MA/B PICTail, by default, has the **Push** button already pressed. For an actual product based on the MRF24WG0MA/B PICTail, the user will need to be prompted to press the **Push** button.


5. On the AP or router settings, select WPS mode, and then click the **Push** button to initiate the WPS procedure.

FIGURE 4-44: ACCESS POINT/ROUTER WPS PUSH BUTTON METHOD

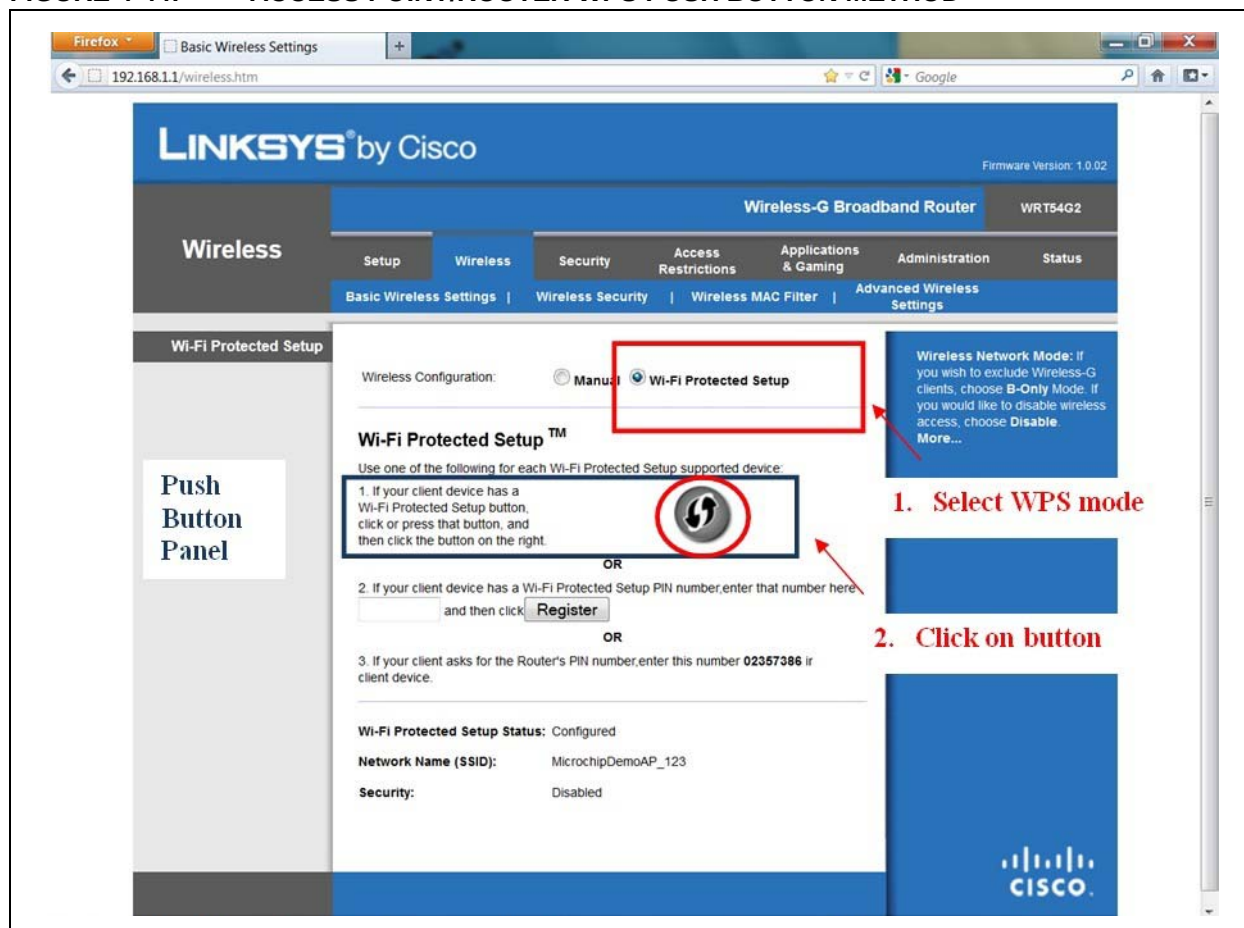


6. The AP will search and connect to the client devices, see [Figure 4-45](#) and [Figure 4-46](#).

FIGURE 4-45: ACCESS POINT/ROUTER IN SEARCH MODE

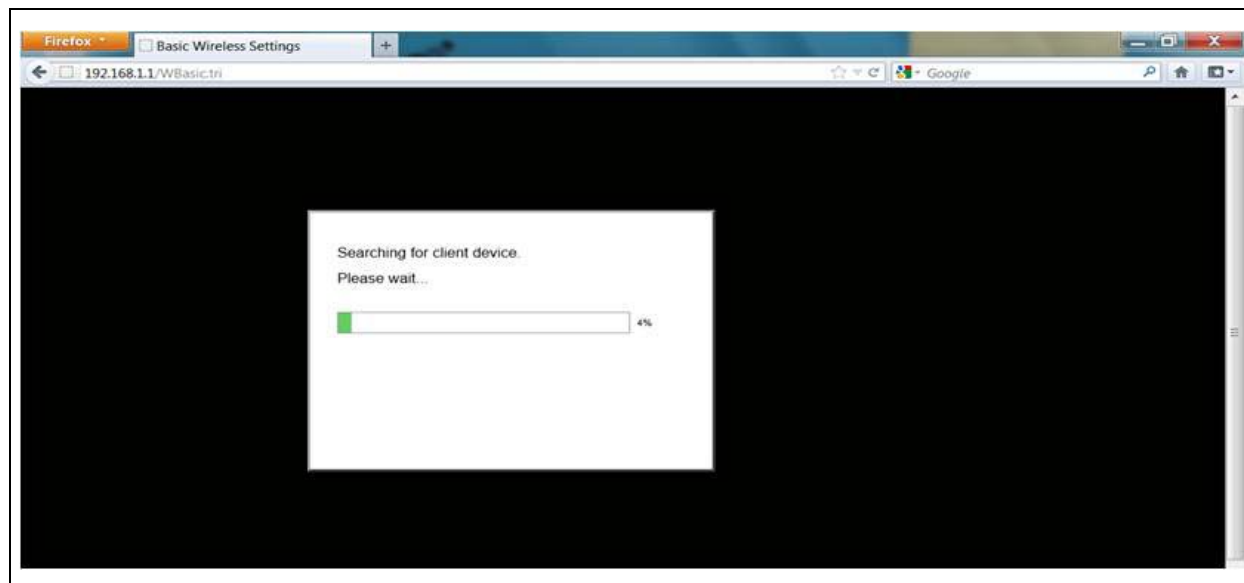


Sample Application Demonstrations

FIGURE 4-46: ACCESS POINT/ROUTER FOUND AND CONNECTING TO DEVELOPMENT BOARD

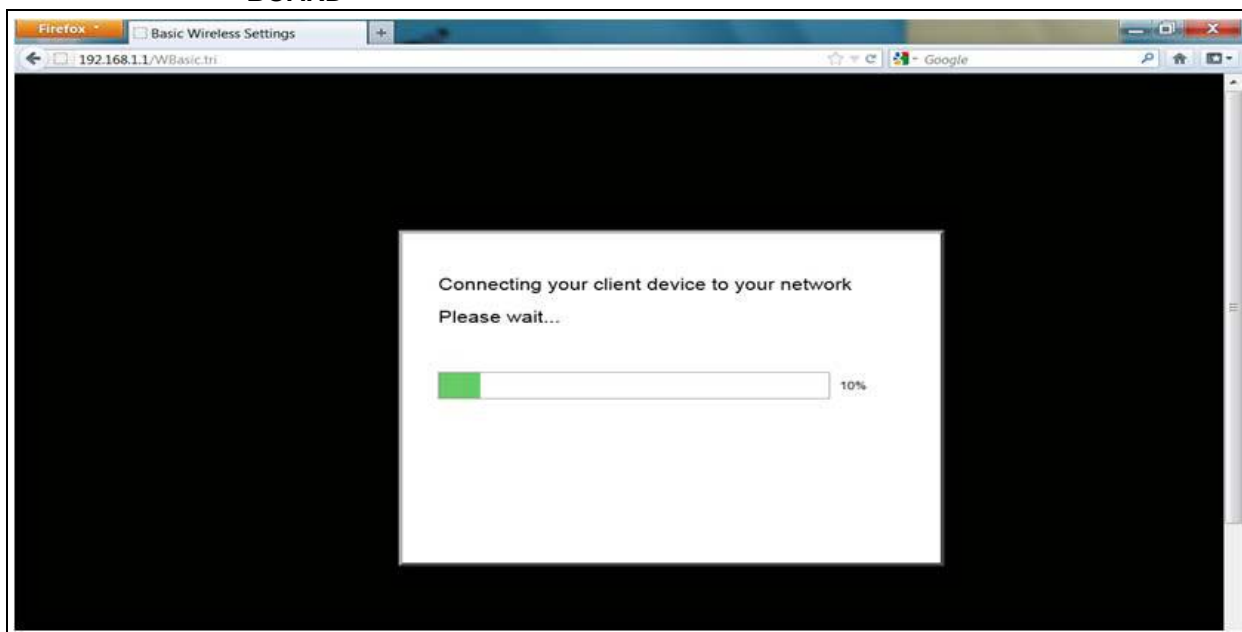


7. After the development board has established the connection, the AP prompts the message as shown in [Figure 4-47](#).

FIGURE 4-47: ACCESS POINT/ROUTER WPS PUSH BUTTON METHOD: SUCCESSFUL CONNECTION

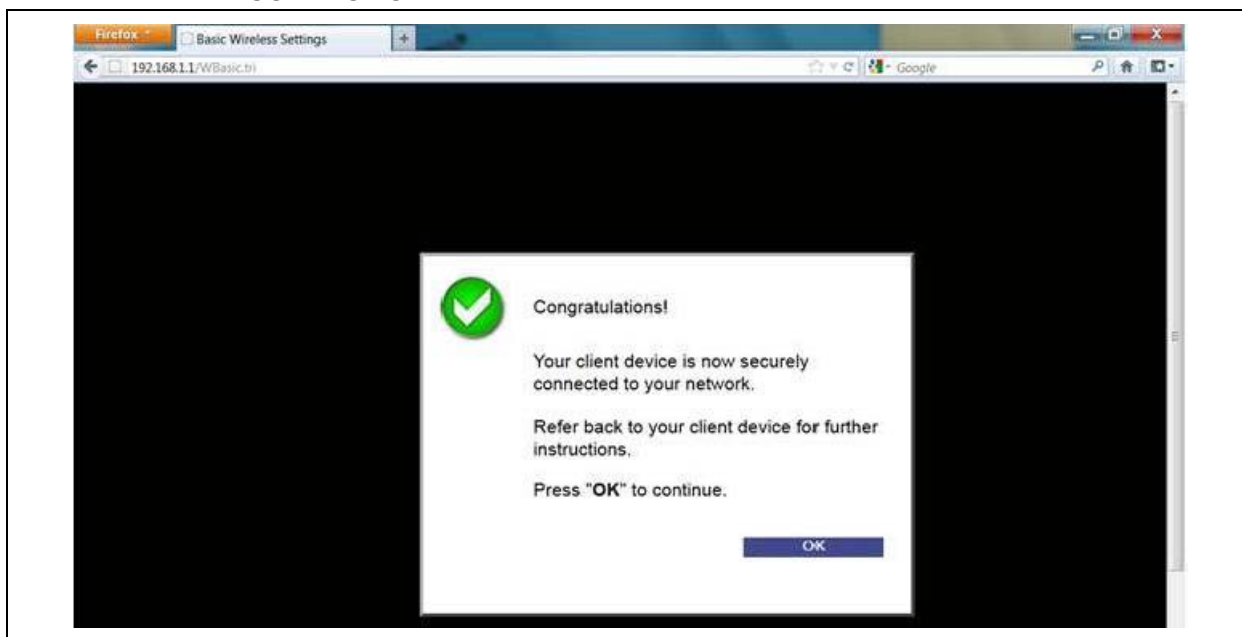

8. Click **OK**.
9. The serial output will display the connection details as shown in [Figure 4-48](#).

FIGURE 4-48: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: WPS PUSH BUTTON

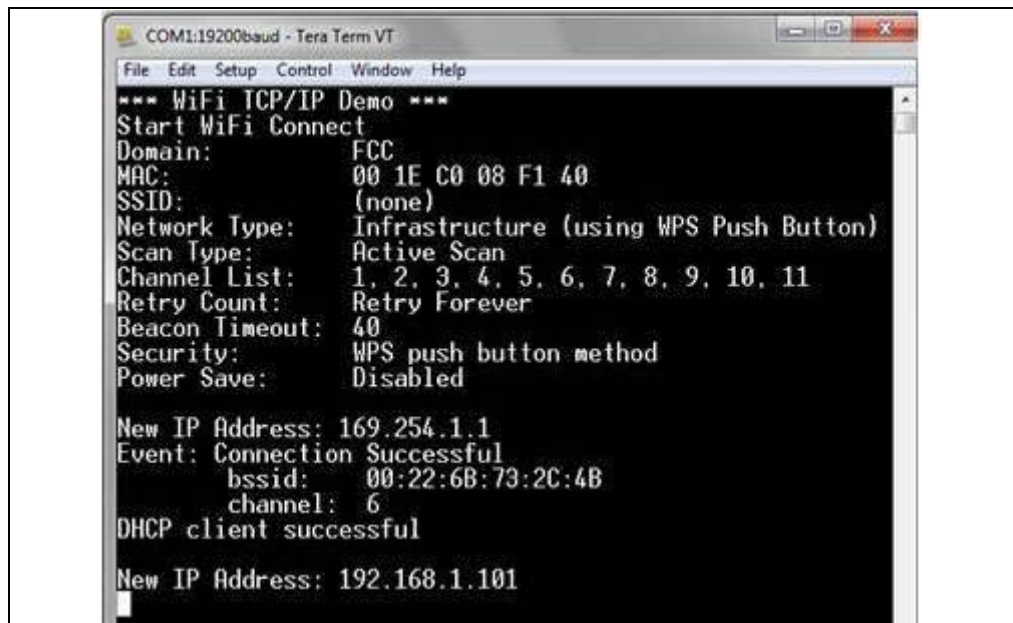

4.7.4.2 WPS METHOD: WF_SECURITY_WPS_PIN

In the WF_Config.h file, perform these actions:


1. Define the MY_DEFAULT_WIFI_SECURITY_MODE as WF_SECURITY_WPS_PIN.
2. Define the MY_DEFAULT_WPS_PIN to be used, and this needs to be an exact match to the AP/router PIN, for example, 12390212.
3. Define the MY_DEFAULT_SSID_NAME to be same as the AP or router's SSID.
4. After the development board is powered up and running, the UART output will display the message shown in Figure 4-49.

FIGURE 4-49: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: WPS PIN METHOD




5. With the software running on the development board, on the AP or router settings select WPS mode. Enter the PIN number and click **Register**. These procedures are similar for different APs or routers.

FIGURE 4-50: ACCESS POINT/ROUTER WPS PIN METHOD

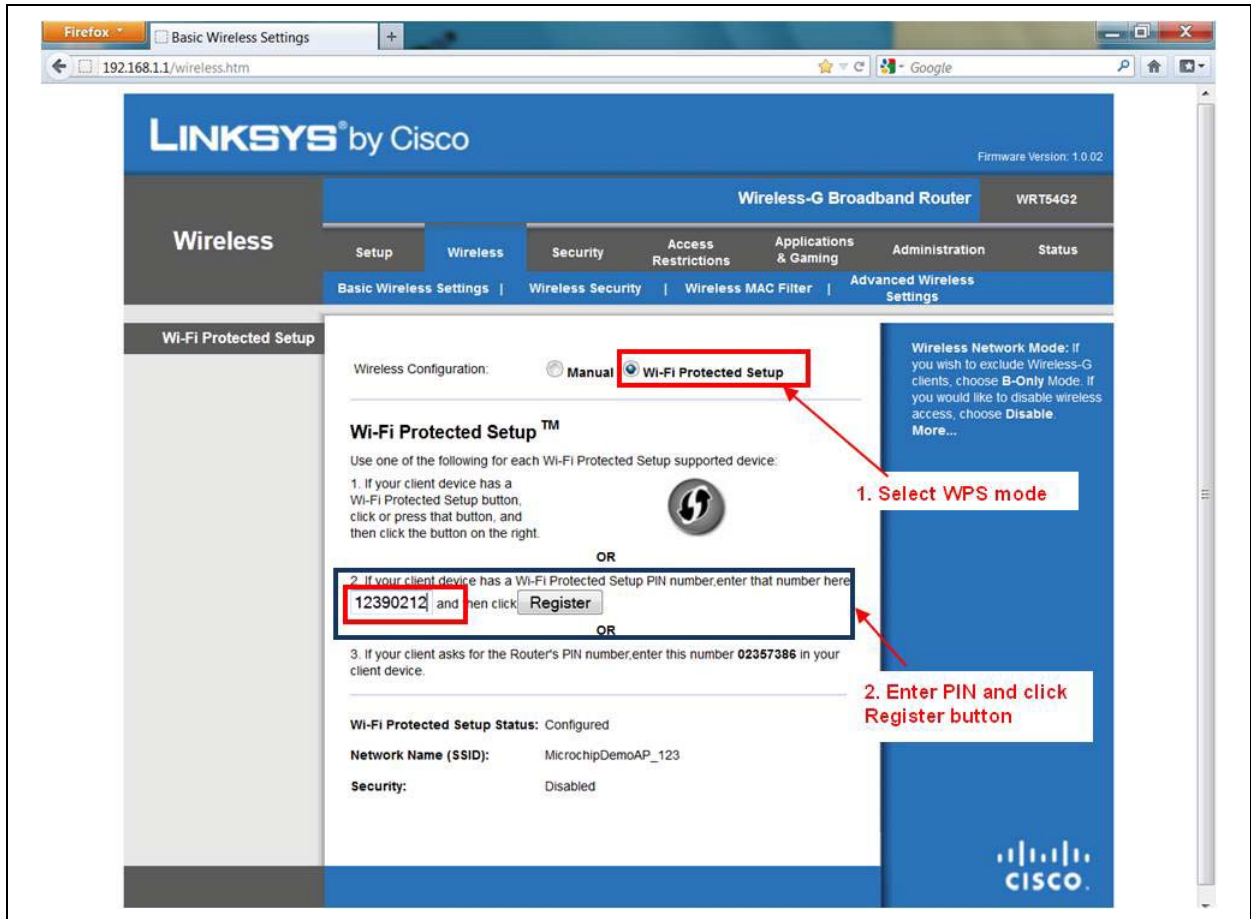

6. The AP or router will search for the development board, and report the status of the successful connection, as shown in [Figure 4-51](#).


FIGURE 4-51: ACCESS POINT/ROUTER WPS PIN METHOD: SUCCESSFUL CONNECTION

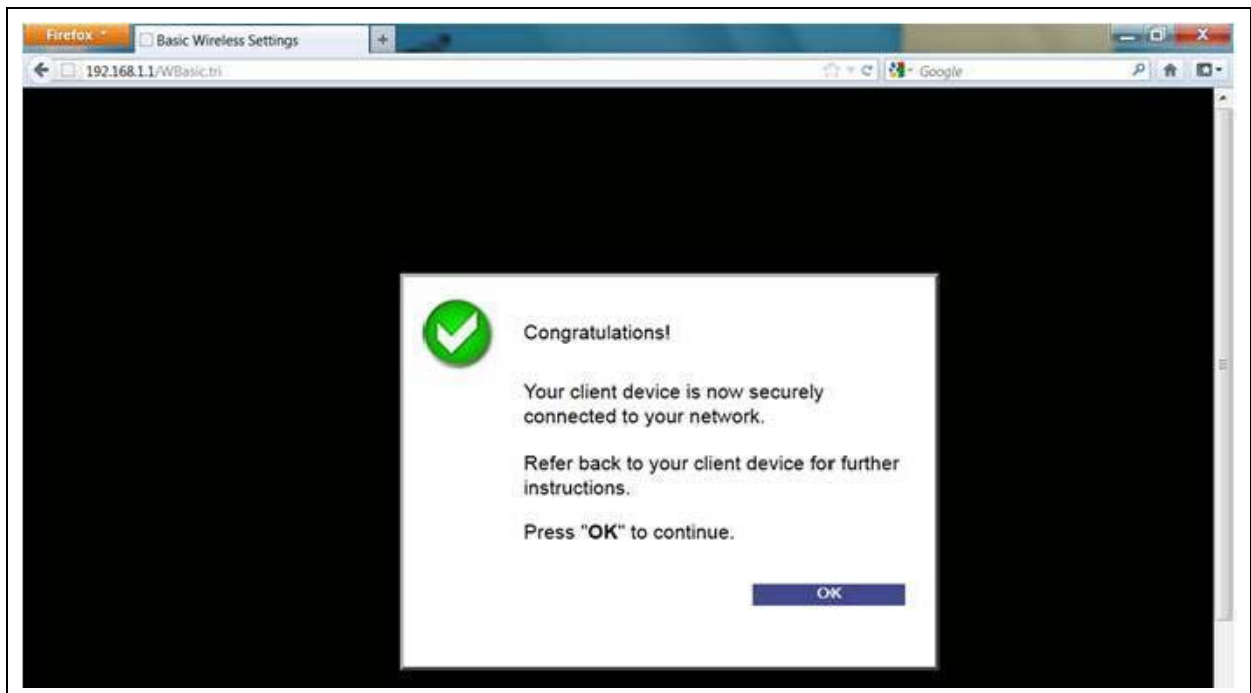

Sample Application Demonstrations

7. After AP or router accepts the connection request, the development board will display the status as connection successful, see [Figure 4-52](#).

FIGURE 4-52: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: WPS PIN METHOD

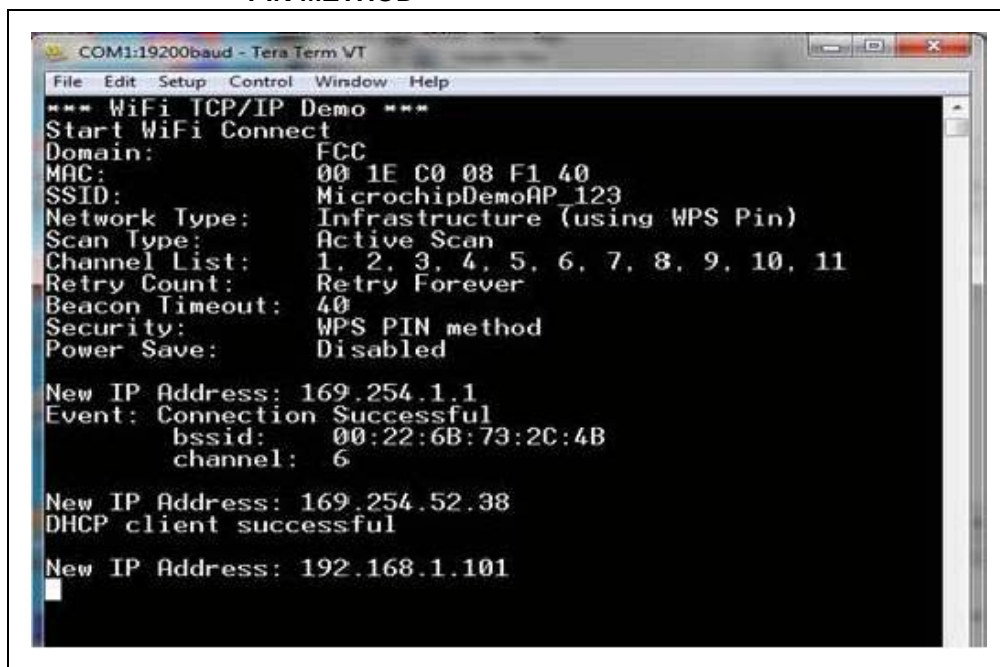

4.8 RUNNING THE TCPIP – WIFI CONSOLE

This demonstration supports the following network types:

- CFG_WF_INFRASTRUCTURE
- CFG_WF_ADHOC
- CFG_WF_P2P.


This section only elaborates the CFG_WF_INFRASTRUCTURE network type. Refer to [4.1.1 “TCPIP – Demo App”](#), for more information on the CFG_WF_ADHOC and CFG_WF_P2P network types.

Iperf is a commonly used network test tool that allows user to test throughput for network performance measurements. Iperf operates with a server and a client. The client will send data to the server at a specified rate and the bandwidth will be calculated from the server side (even though both the client and server will produce throughput numbers, the numbers that are in the server window are the most accurate). Iperf requires the serial UART port to be connected to a computer (issuing commands through the HyperTerminal session). To run the Iperf demonstration, compile the correct project. Refer to [4.3 “Opening Existing Projects”](#), but instead use the projects that are located in C:\Microchip Solutions\ TCPIP\ WiFi Console\.

4.8.1 Installing iperf.exe

1. After compiling and downloading the code, install iperf.exe on the computer. Refer to [Appendix A.4](#), for a link to access the iperf.exe.
2. Download and install the iperf.exe binary file in the C:\Windows\system32 that is easier to use from any command prompt in the future.

FIGURE 4-53: INSTALLING Iperf.exe

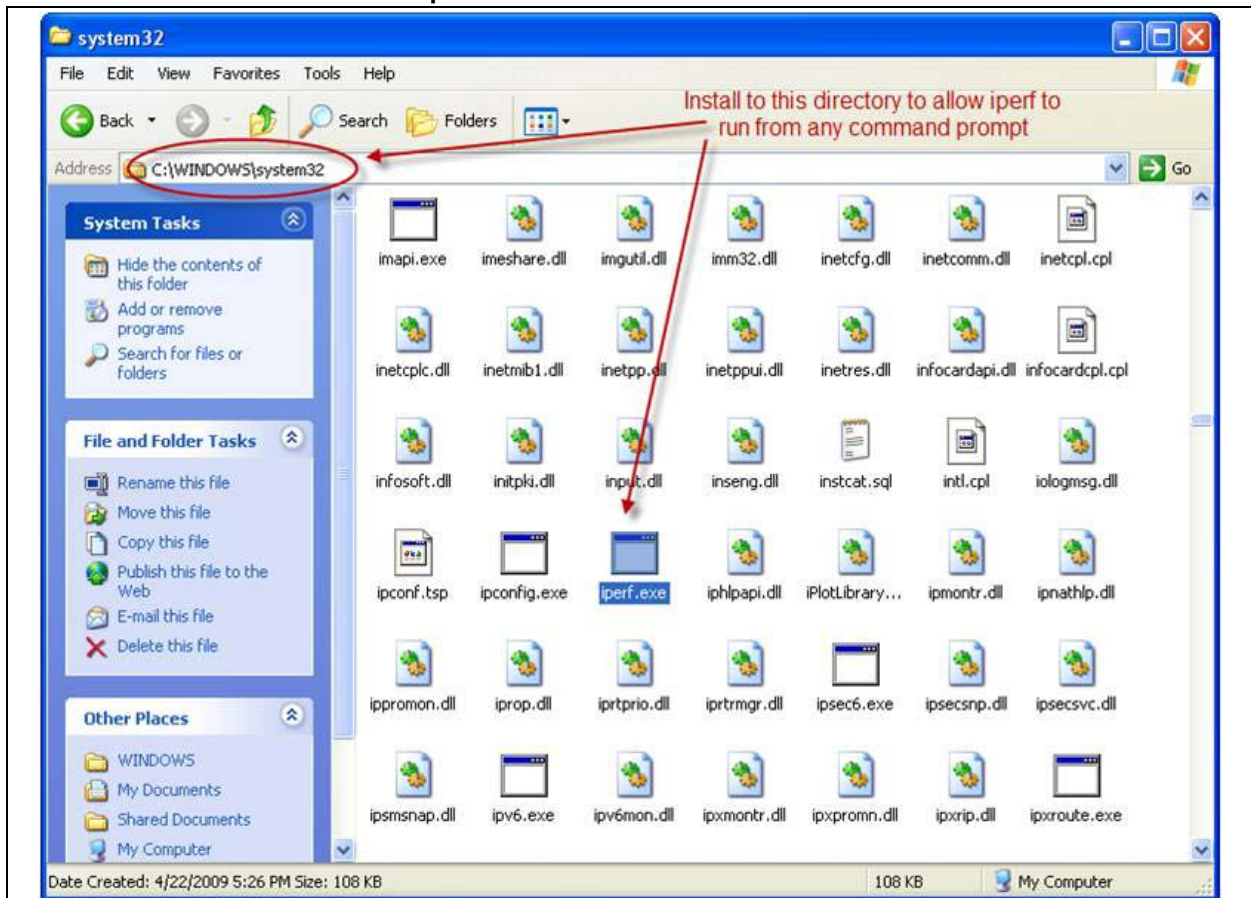

Sample Application Demonstrations

3. After installing Iperf, on the computer open a command prompt either running the `cmd.exe` from the “Run” dialog (see [Figure 4-54](#)) or by selecting it from the **All Programs** menu (see [Figure 4-55](#)).

FIGURE 4-54: OPENING A COMMAND PROMPT FROM RUN DIALOG



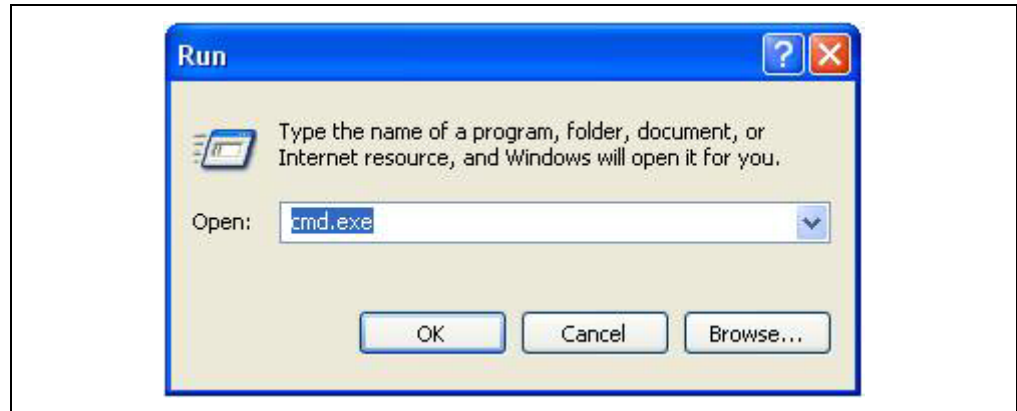


FIGURE 4-55: OPENING A COMMAND PROMPT FROM PROGRAMS MENU

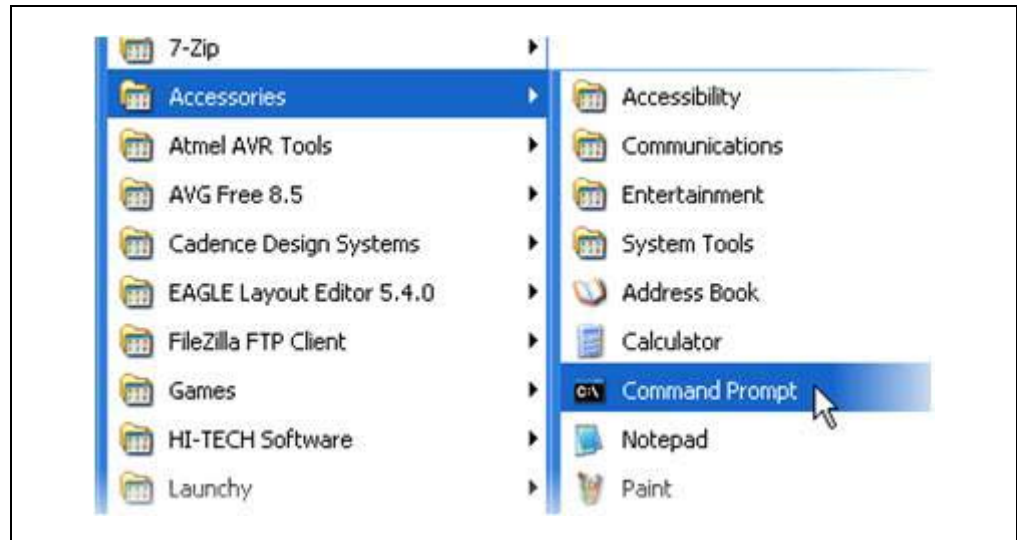

4. To run Iperf, user must know the IP address of the development board and the computer (server and client). The IP address of the development board can be viewed on the LCD or on the serial output, as shown in [Figure 4-56](#).


FIGURE 4-56: DEVELOPMENT BOARD SERIAL OUTPUT

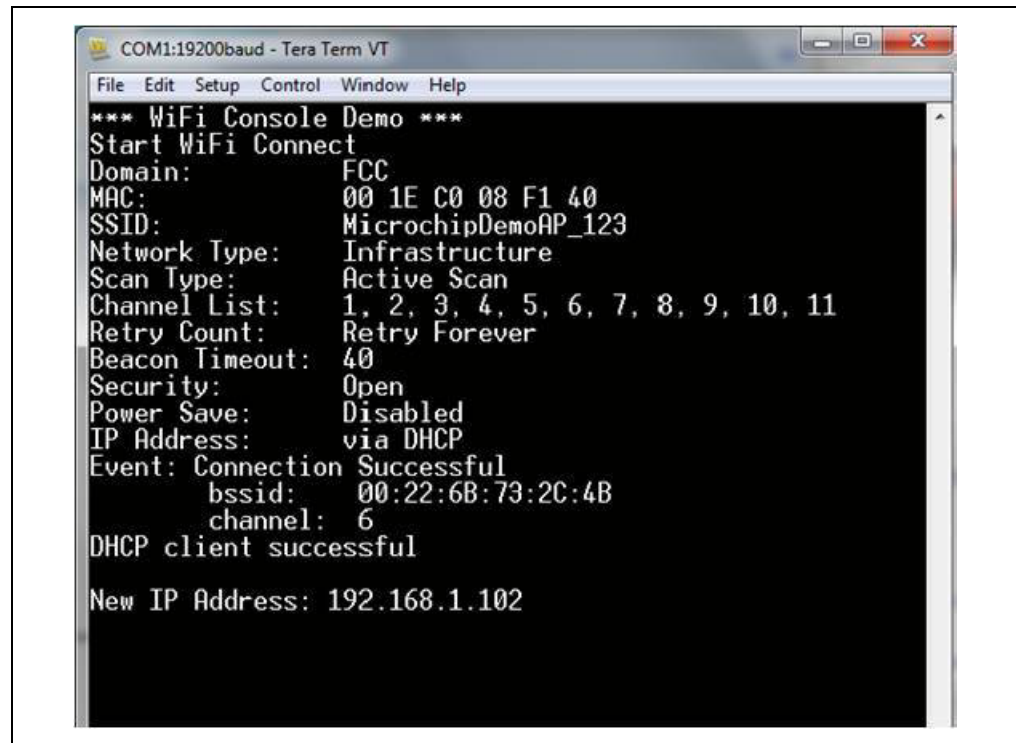

5. In the HyperTerminal window of the development board, press the **Enter** key, [Figure 4-57](#) is displayed and it indicates the development board is ready to run Iperf.


Sample Application Demonstrations

FIGURE 4-57: HYPERTERMINAL WINDOW READY

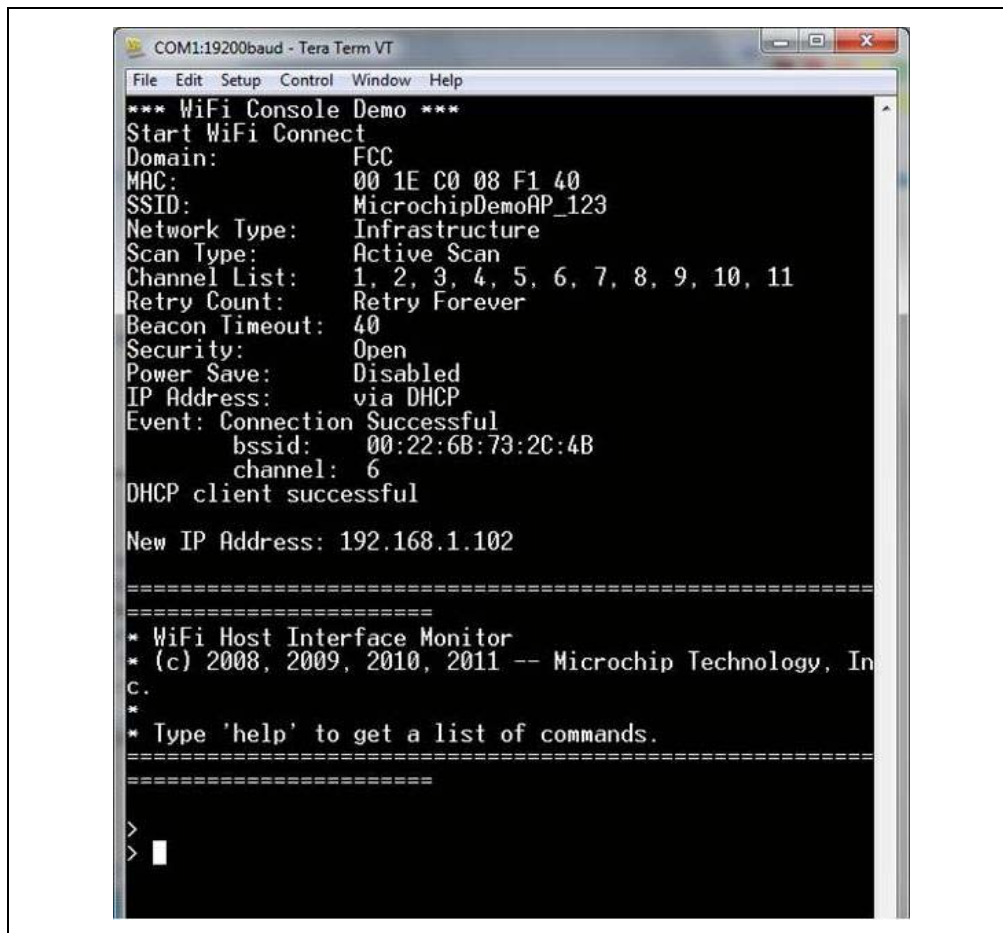

6. To get the IP address of the computer, run `ipconfig` command from the command prompt, as shown in Figure 4-58.

FIGURE 4-58: USING IPCONFIG TO GET PC IP ADDRESS

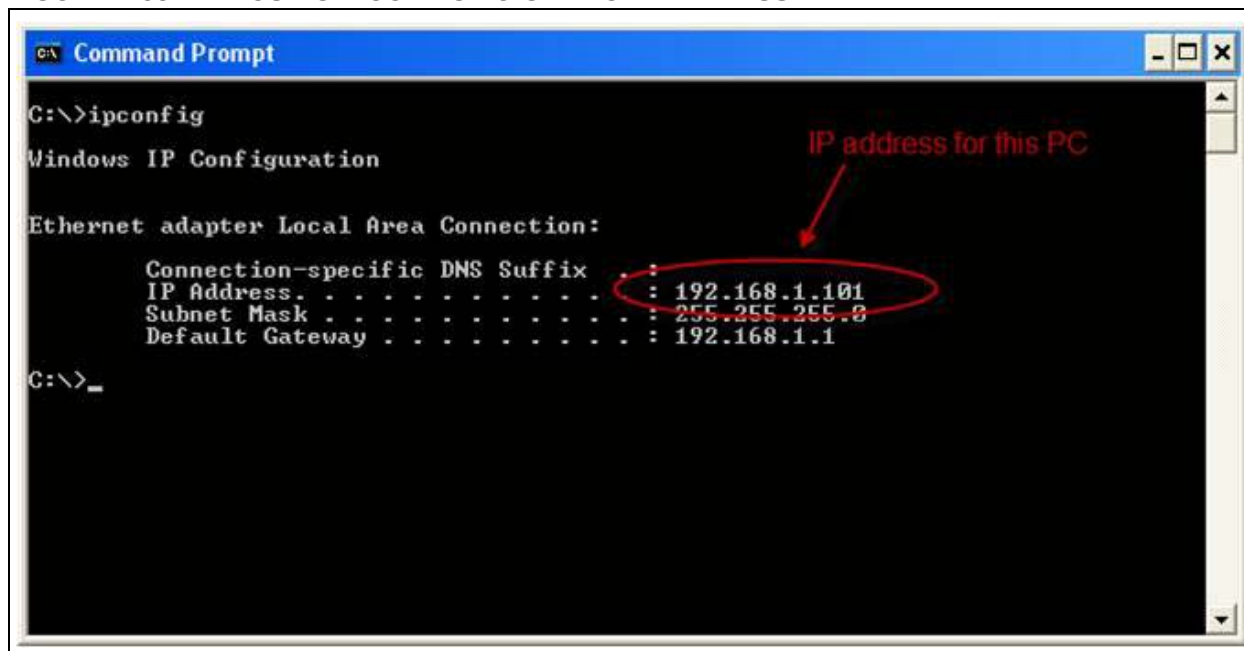

4.8.2 ipconfig Command Details

A typical server and client command, and what the options meaning is provided below:

- `iperf -s -u -i <seconds>`

Where,

- s indicates the server
- u sends UDP datagrams
- i <seconds> indicates frequency of the status update

- `iperf -c <ip_addr> -b <bw> -i <seconds> -t <seconds>`

Where,

- c indicates the client
- <ip_addr> is the IP address of the server to communicate to
- b <bw> specifies the amount of data to try and pass through as bandwidth
- i <seconds> indicates how often the screen updates the status
- t <seconds> indicates how long to run the test for

4.8.3 Testing Transmit Performance


To test the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PICtail™ transmit performance, set up the following:

1. Computer (command prompt) as the server.
2. PICtail (HyperTerminal session) as the client.

Note: Before starting user must start the server connection.


3. A sample of the typical Iperf run for testing the transmit performance on the computer (server) and Development Board (client), see [Figure 4-59](#) and [Figure 4-60](#).

FIGURE 4-59: IPERF TRANSMIT PERFORMANCE (PC – SERVER)

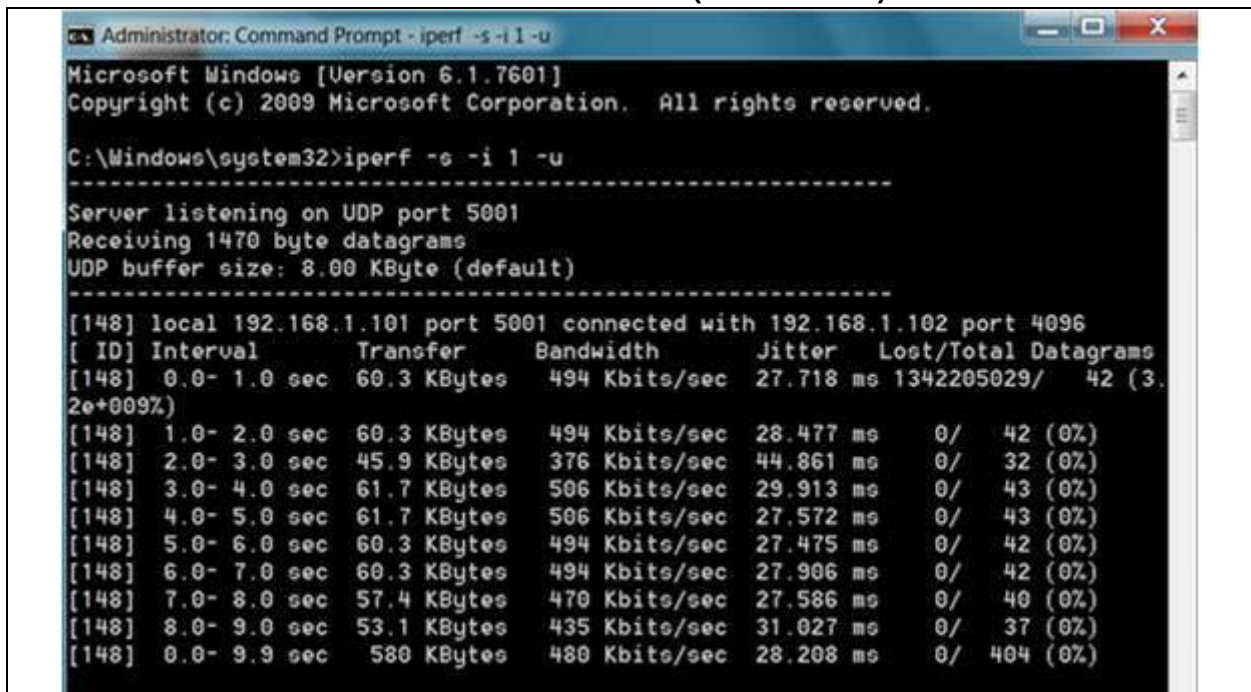

Note: If encounter error in running Iperf under WinOS, run Iperf in Administrator mode.

FIGURE 4-60: IPERF TRANSMIT PERFORMANCE (DEVELOPMENT BOARD – CLIENT)

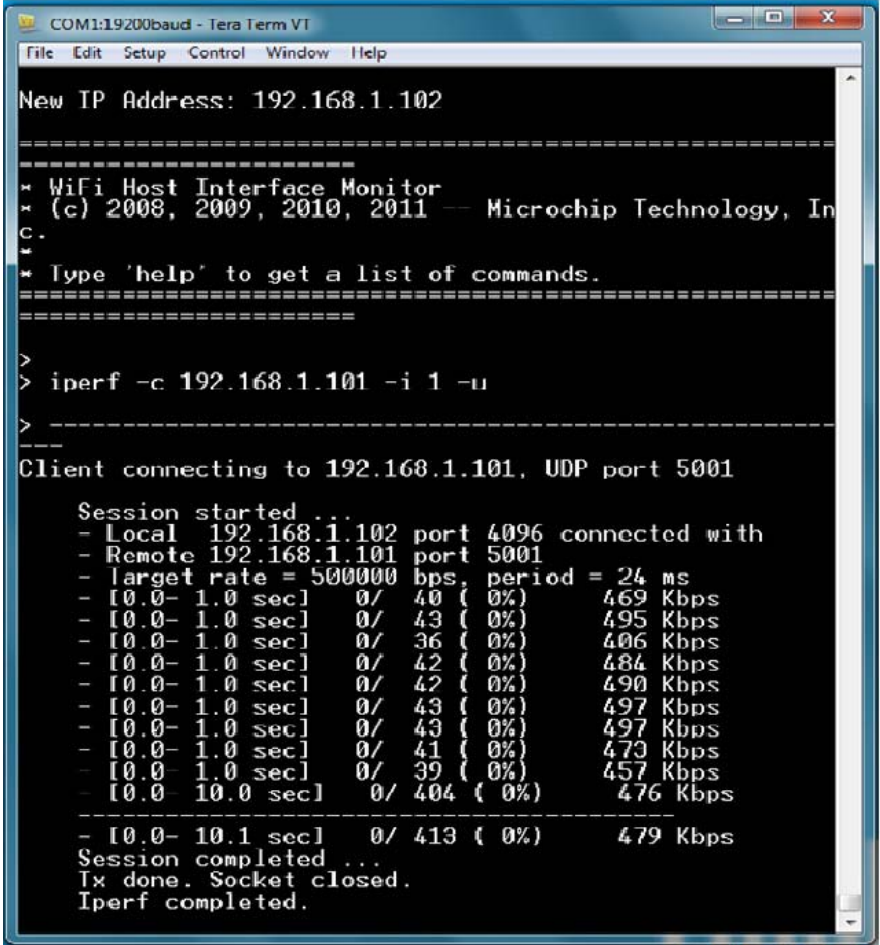

The screenshot shows a Tera Term VI window titled "COM1:19200baud - Tera Term VI". The window displays the following text:

```
File Edit Setup Control Window Help

New IP Address: 192.168.1.102

=====
* WiFi Host Interface Monitor
* (c) 2008, 2009, 2010, 2011 — Microchip Technology, Inc.
*
* Type 'help' to get a list of commands.
=====

>
> iperf -c 192.168.1.101 -i 1 -u
>
-----
Client connecting to 192.168.1.101, UDP port 5001

Session started ...
- Local 192.168.1.102 port 4096 connected with
- Remote 192.168.1.101 port 5001
- Target rate = 500000 bps, period = 24 ms
- [0.0- 1.0 sec] 0/ 40 ( 0%) 469 Kbps
- [0.0- 1.0 sec] 0/ 43 ( 0%) 495 Kbps
- [0.0- 1.0 sec] 0/ 36 ( 0%) 406 Kbps
- [0.0- 1.0 sec] 0/ 42 ( 0%) 484 Kbps
- [0.0- 1.0 sec] 0/ 42 ( 0%) 490 Kbps
- [0.0- 1.0 sec] 0/ 43 ( 0%) 497 Kbps
- [0.0- 1.0 sec] 0/ 43 ( 0%) 497 Kbps
- [0.0- 1.0 sec] 0/ 41 ( 0%) 473 Kbps
- [0.0- 1.0 sec] 0/ 39 ( 0%) 457 Kbps
- [0.0- 10.0 sec] 0/ 404 ( 0%) 476 Kbps
- [0.0- 10.1 sec] 0/ 413 ( 0%) 479 Kbps
Session completed ...
Tx done. Socket closed.
Iperf completed.
```

4. To know the development board receiver performance, the server and client must reverse roles (server is the development board HyperTerminal session and client is the computer command prompt window). Also, change the IP address to match the server's address.

4.9 RUNNING THE TCPIP – WIFI EZCONFIG


This demonstration supports the following network types:

- CFG_WF_ADHOC
- CFG_WF_SOFT_AP

4.9.1 Network Type: CFG_WF_ADHOC

In this demonstration, a computer with wireless network adapter is used. Smart devices, such as iPhone can also be used. This demonstration will direct the user to connect to another AP in infrastructure network type. [Figure 4-61](#) shows the ad hoc network environment setup.

FIGURE 4-61: AD HOC NETWORK ENVIRONMENT SETUP

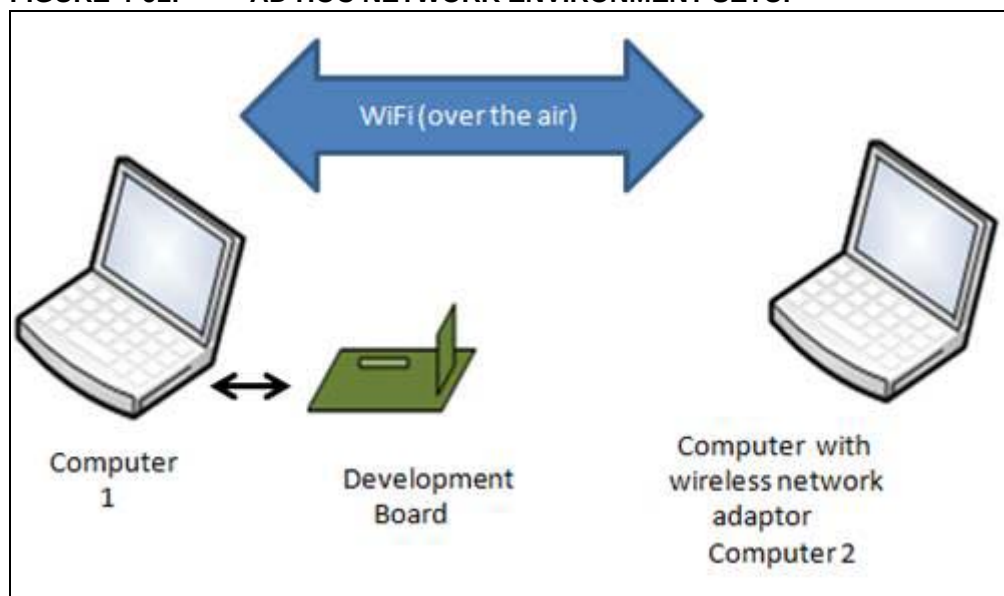

In the `WF_Config.h` file, perform these actions:


1. Define `MY_DEFAULT_NETWORK_TYPE` as `CFG_WF_ADHOC`.

The demonstration will attempt to connect to the last known network.

Note: If the user wants to Reset the demonstration to startup in Ad hoc mode again, press and hold **S3** button on the Explorer 16 Development Board four seconds.


Sample Application Demonstrations

FIGURE 4-62: PRESS S3 BUTTON ON EXPLORER 16 DEVELOPMENT BOARD TO RESET DEMO)

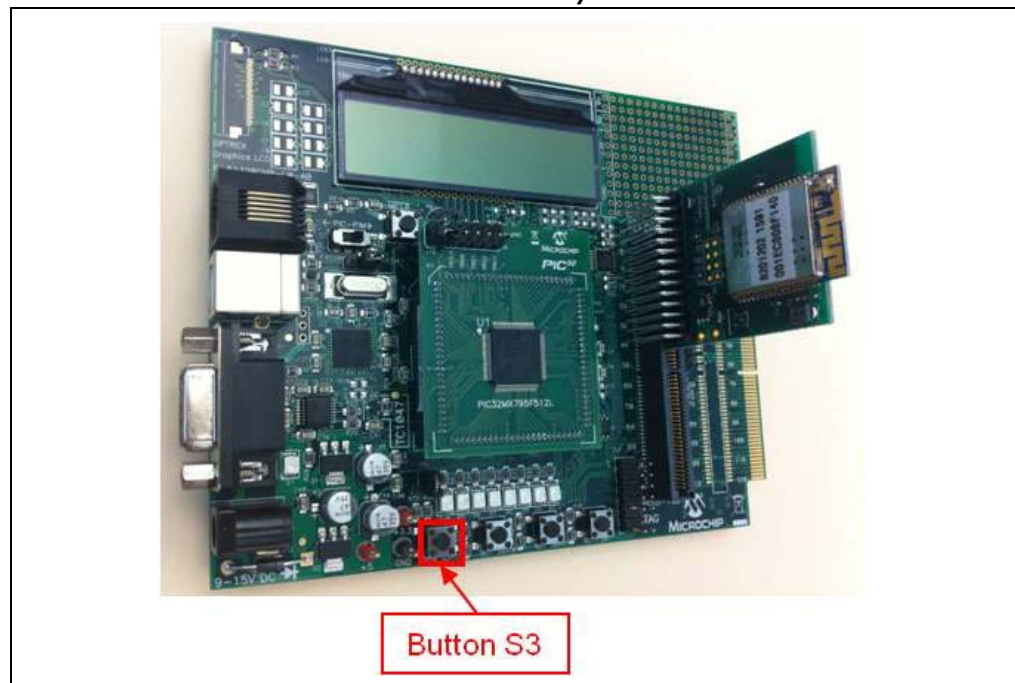


2. The serial output is changed to indicate Reset is effective, see [Figure 4-63](#).

FIGURE 4-63: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY: RESET MESSAGE

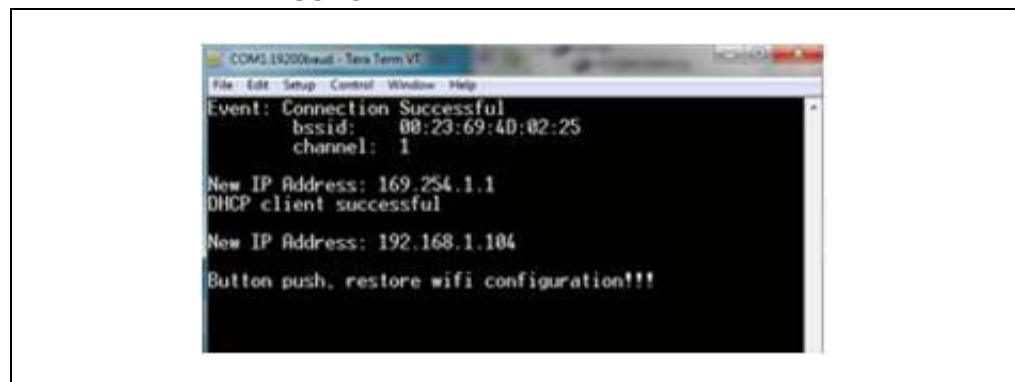


3. After the development board has established connection with computer 2, the LCD panel will display the IP address of the computer that is being used. Alternately, the serial output should display similar information, see [Figure 4-64](#).

FIGURE 4-64: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY:
SUCCESSFUL CONNECTION

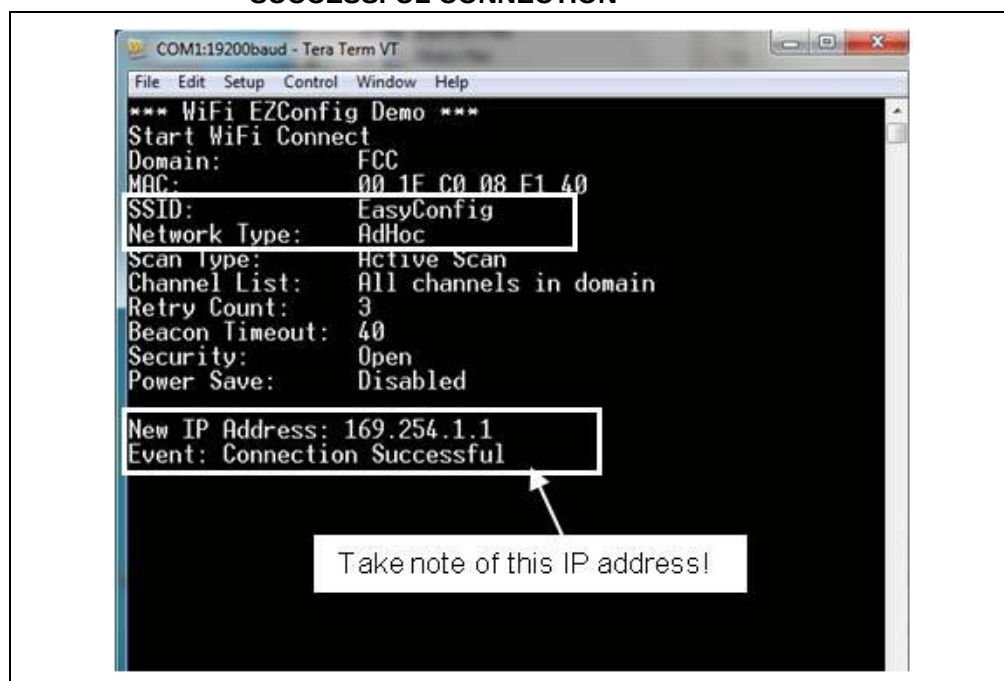

4. Computer 2 will display the list of available wireless networks, and among them is the wireless network with SSID EasyConfig. Click **EasyConfig** to connect to the development board, as shown in [Figure 4-65](#).


FIGURE 4-65: WIRELESS NETWORK CONNECTION (COMPUTER 2)

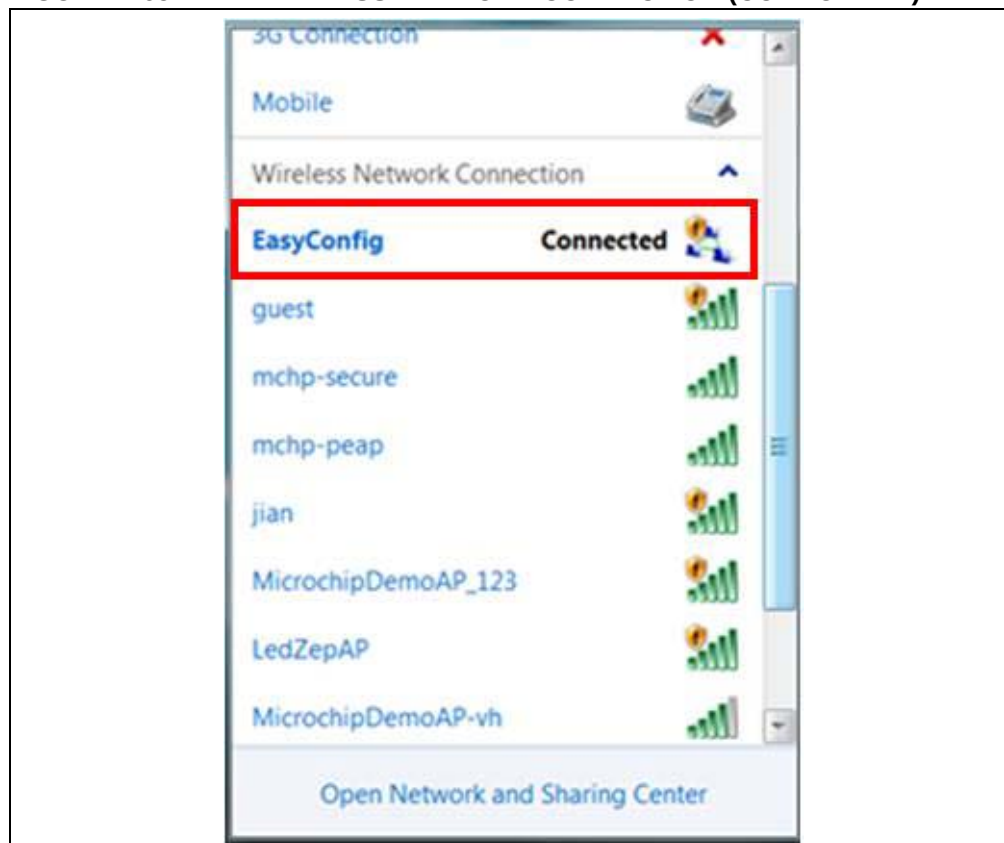

Sample Application Demonstrations


5. On successful connection between the development board (computer 1) and computer 2, use the web browser on computer 2 to download the image and upload the Easyconfig.bin file. This file is located in the root directory of the TCPIP-WiFi EZConfig directory, see Figure 4-66.
6. On computer 2 web browser, type <http://xxx.xxx.xxx.xxx/mpfsupload>, where xxx.xxx.xxx.xxx is the IP address of the development board.

FIGURE 4-66: WEB SERVER IMAGE UPLOAD (COMPUTER 2)

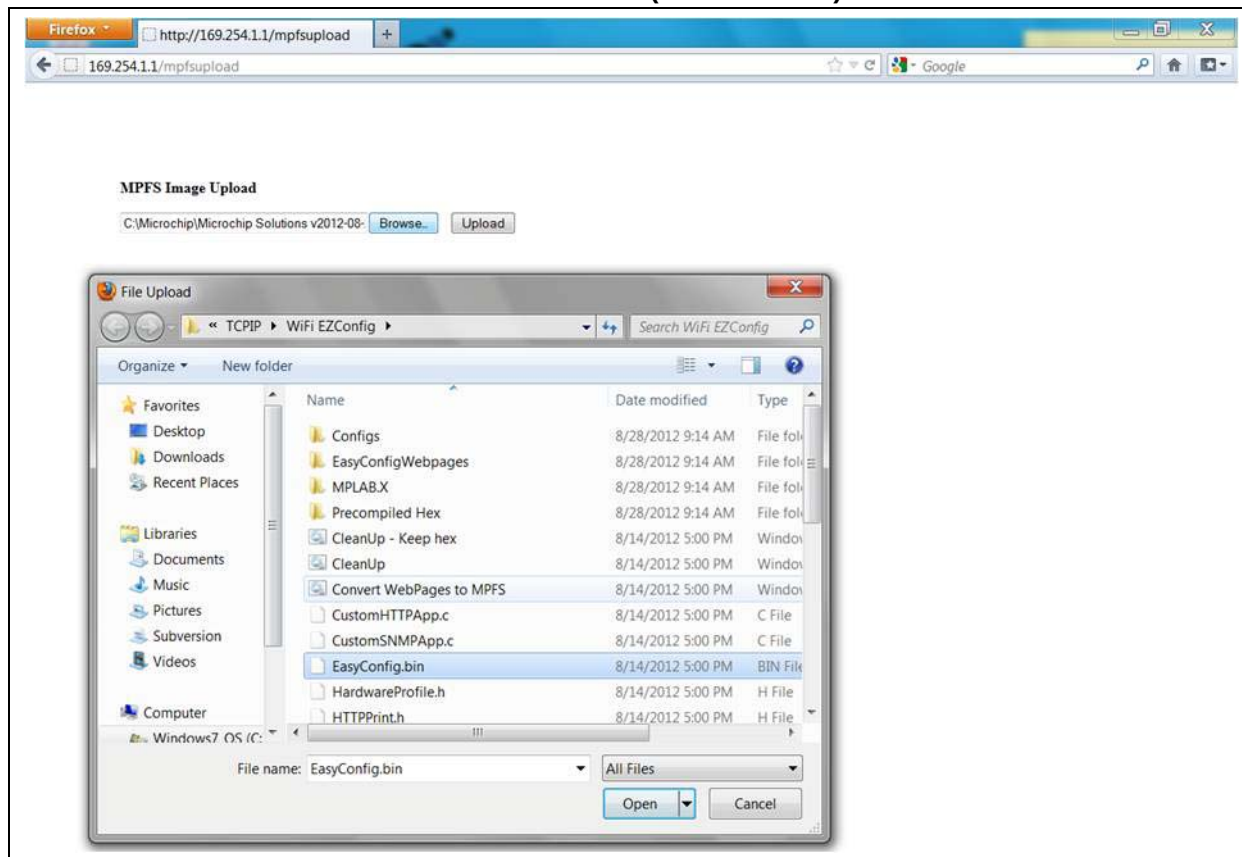


7. On successful uploading, click the site main page link to navigate to the main page of the web browser, see Figure 4-67.

FIGURE 4-67: WEB BROWSER (COMPUTER 2)

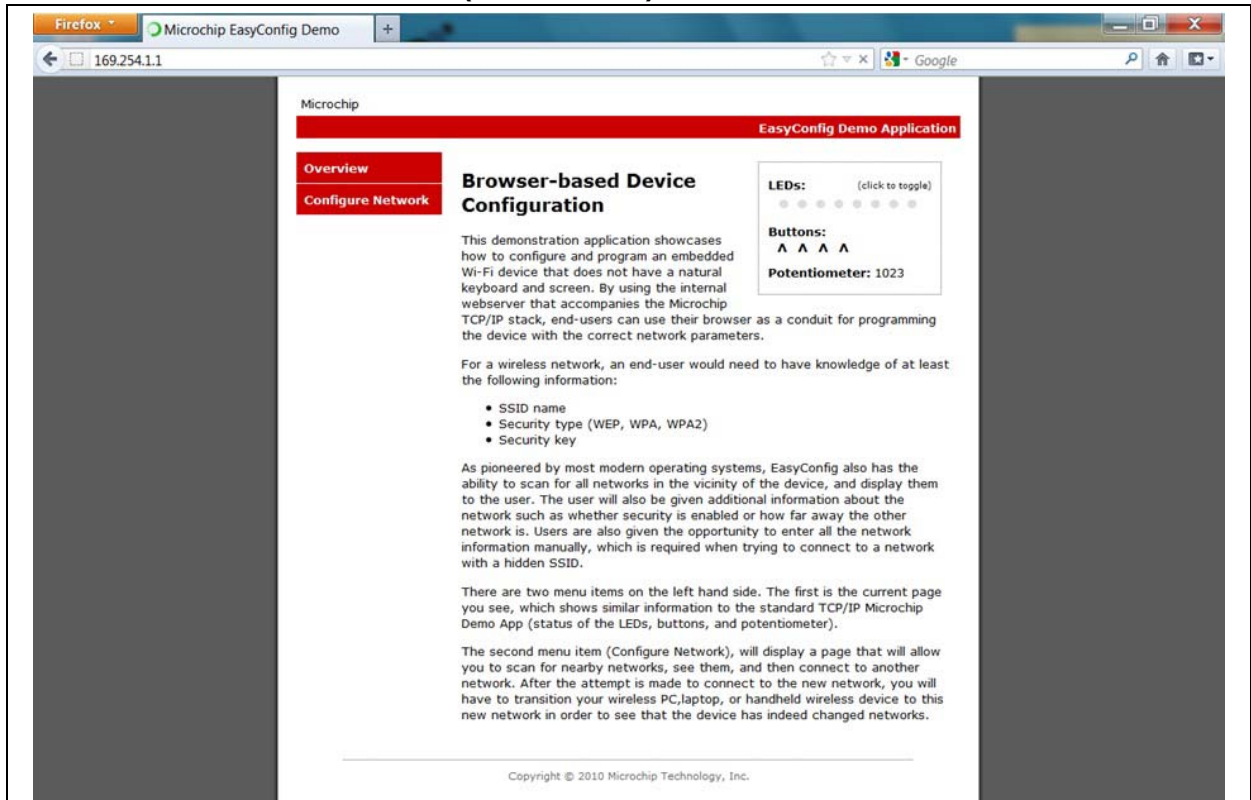

8. Click **Configure Network** to scan for wireless networks. As scanning is in progress, you may receive an error message, as shown in [Figure 4-68](#).

FIGURE 4-68: WEB BROWSER (COMPUTER 2): CONFIGURE NETWORK AND SCANNING

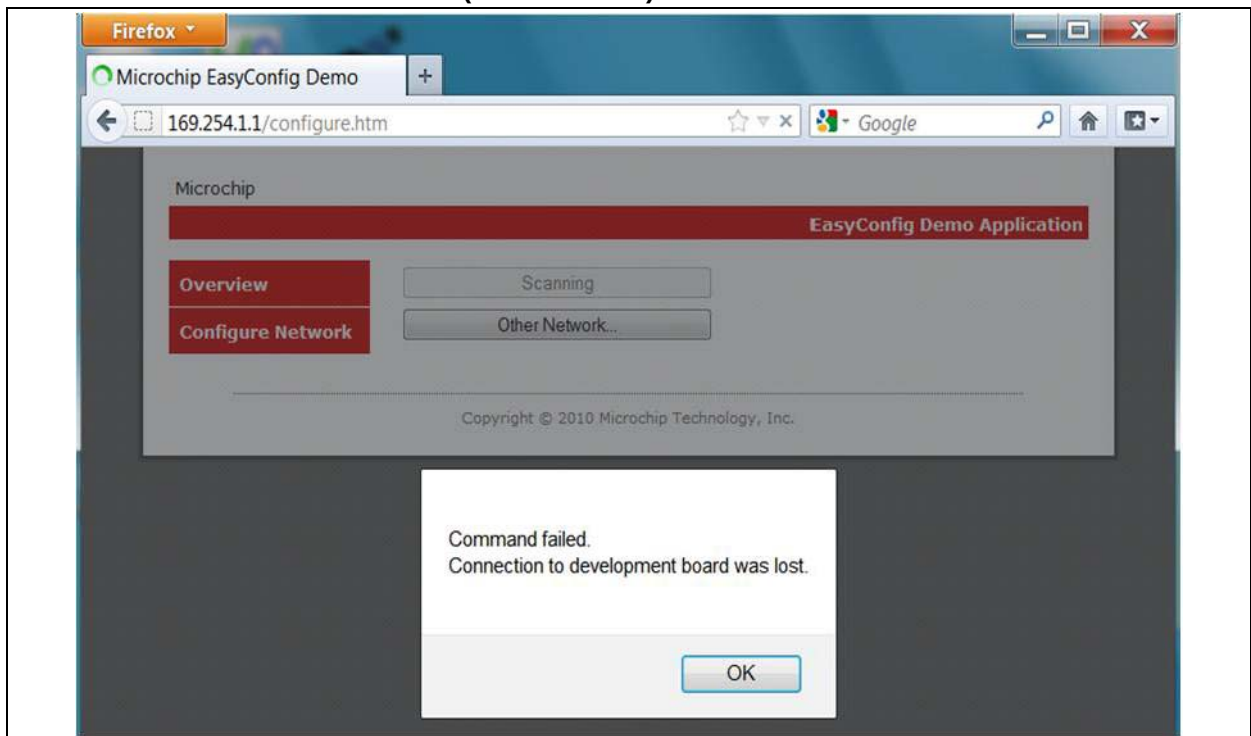


9. Click **OK**.

Sample Application Demonstrations


- After scanning is completed, a list of available wireless network will be displayed, see [Figure 4-69](#).

FIGURE 4-69: WEB BROWSER (COMPUTER 2): LIST OF AVAILABLE WIRELESS NETWORKS

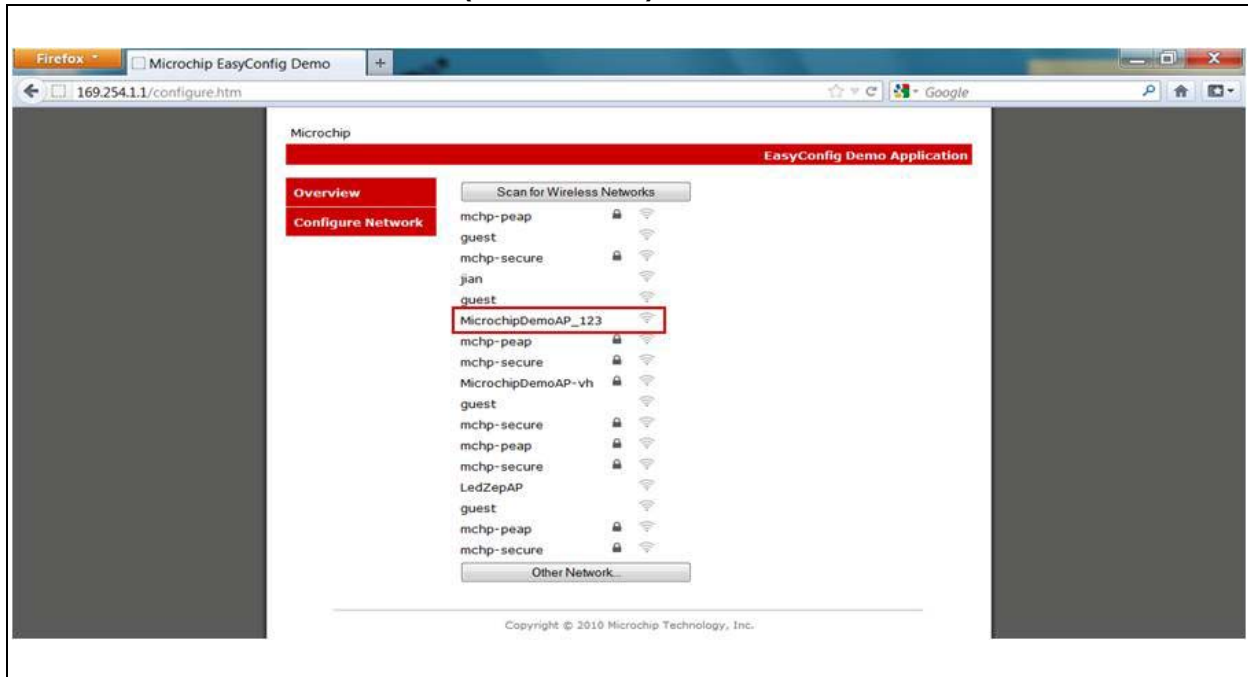


- Click on the specific network, for example, infrastructure network with SSID MicrochipDemoAP_123.
- The development board serial output will display the status of the scan results, see [Figure 4-70](#).

FIGURE 4-70: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY (COMPUTER 1): SCAN RESULTS

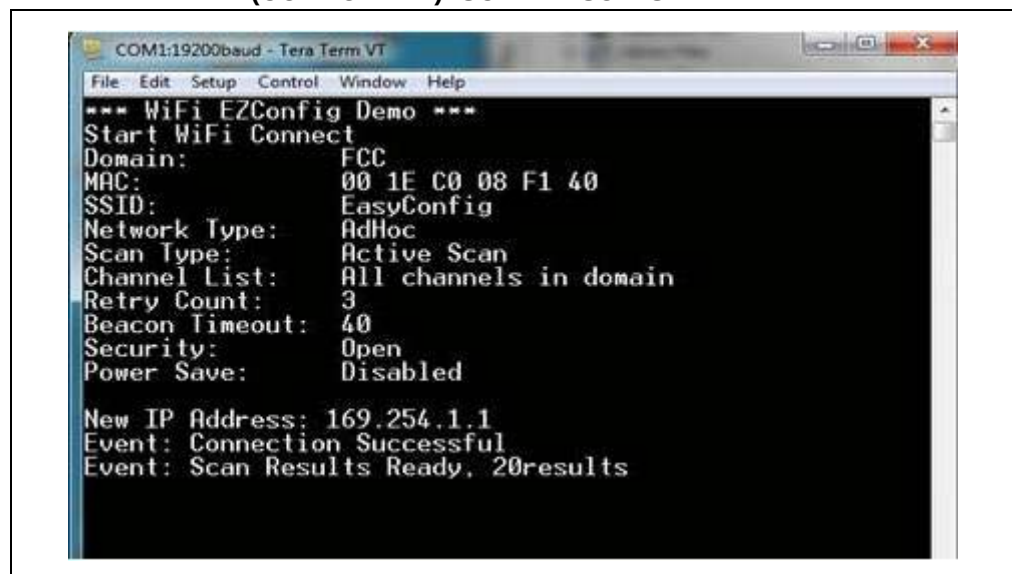

13. The web browser will highlight the transition from the old (ad hoc) network to the newly (infrastructure) selected network, as shown in [Figure 4-71](#). In this example, infrastructure network with SSID MicrochipDemoAP_123.

FIGURE 4-71: WEB BROWSER (COMPUTER 2): TRANSITION FROM OLD (AD HOC MODE) TO NEW (INFRASTRUCTURE MODE) NETWORK

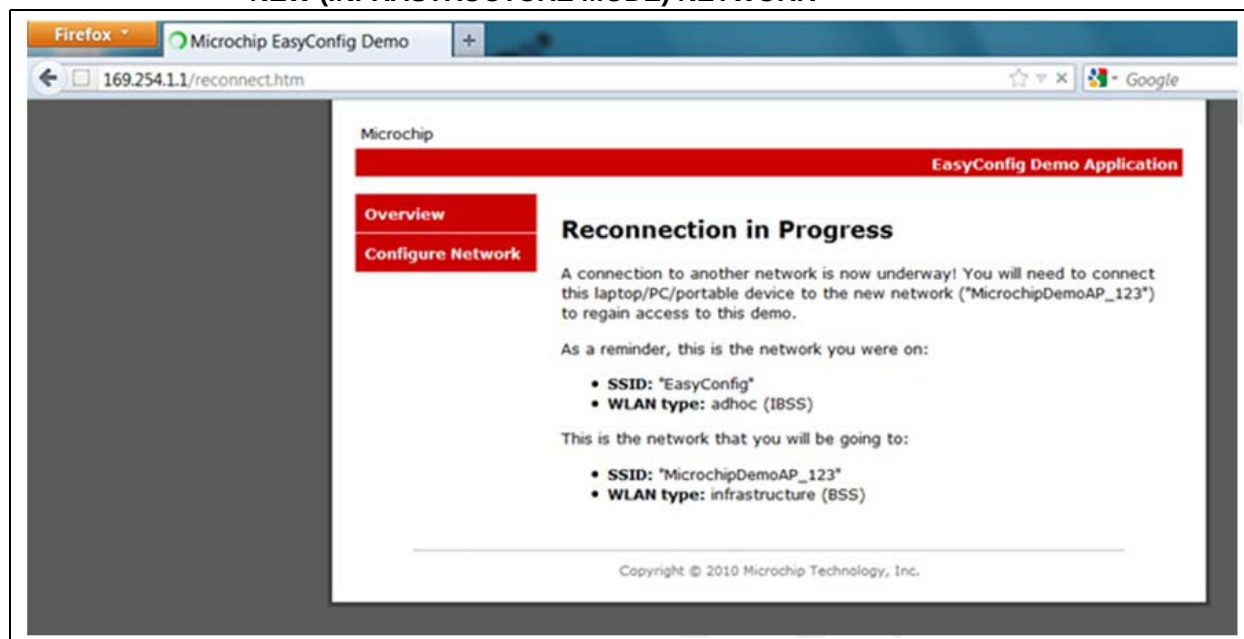

14. The development board serial output will display the status of the new network, as shown in [Figure 4-72](#).


FIGURE 4-72: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY (COMPUTER 1): NEW NETWORK INFO



Sample Application Demonstrations


15. On computer 2, if you enter the old network address, the “Unable to connect” error message will be displayed.

FIGURE 4-73: WEB BROWSER (COMPUTER 2): OLD NETWORK IP ADDRESS

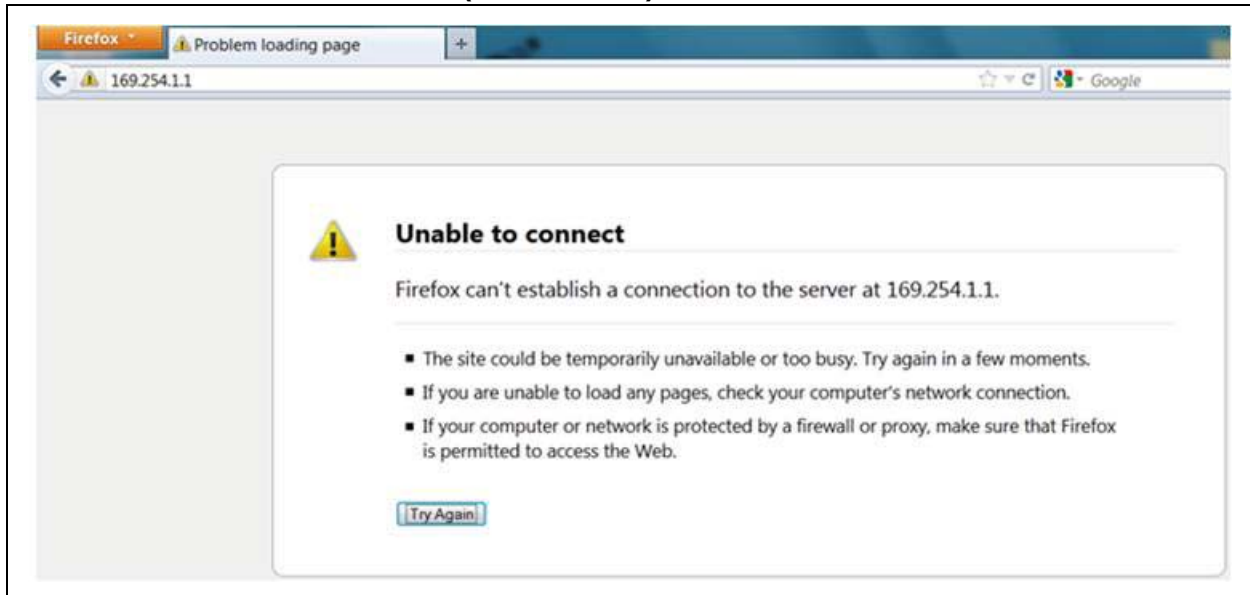

16. Enter the new IP address of the newly joined network.

FIGURE 4-74: WEB BROWSER (COMPUTER 2): NEW NETWORK IP ADDRESS

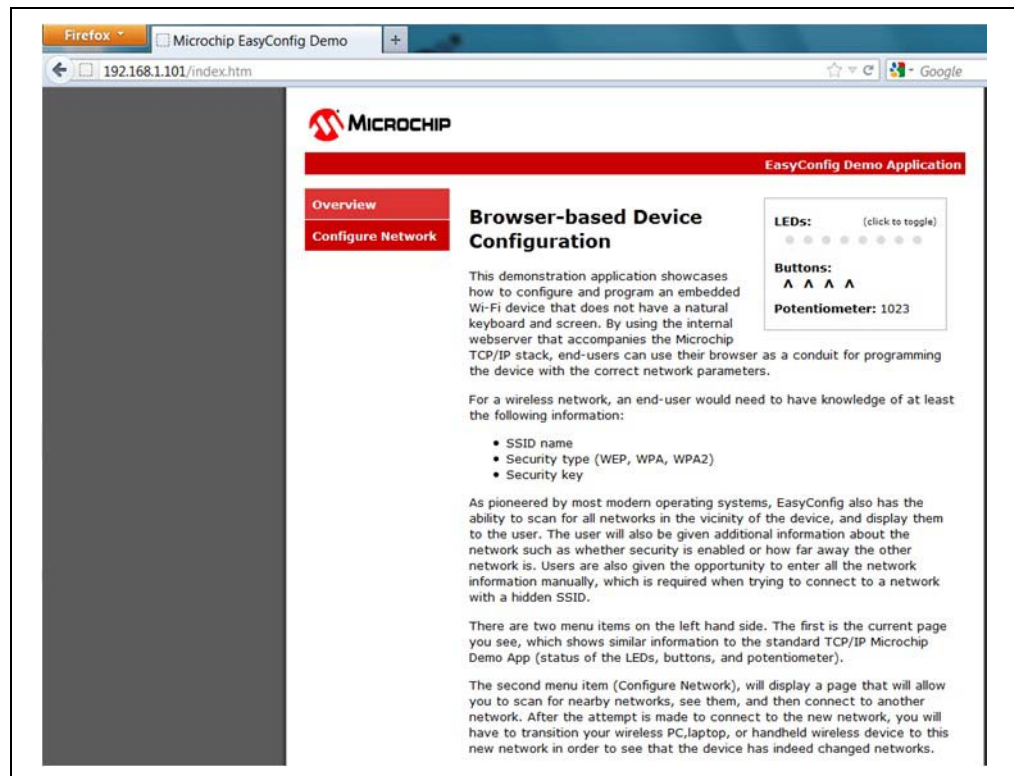

4.9.2 Network Type: CFG_WF_SOFT_AP


This SoftAP function uses the base EasyConfig demonstration due to the required features: DHCP server and HTTP server. The implementation is a simplified SoftAP (as of MLA October 2012 release), and is limited to the following:

- Only supported by MRF24WG0MA/B
- No routing supported
- Only one client is allowed (RF module FW version 0x3107)
- Initial security mode supported is Open mode and WEP security (MLA October 2012 and future versions). More security modes may be supported in the future.
- Does not support Power-save feature.

In the WF_Config.h file, perform these actions:

1. Define the MY_DEFAULT_NETWORK_TYPE as CFG_WF_SOFT_AP.
2. Define the MY_DEFAULT_SSID_NAME, for example, MCHPSoftAP_123.
3. The demonstration attempts to connect to the last known network. If the user wants to reset the demonstration to start in SoftAP mode again, press and hold **S3** button on the Explorer 16 Development Board for four seconds. [Figure 4-75](#) shows the SoftAP environment setup.


FIGURE 4-75: SOFTAP ENVIRONMENT SETUP

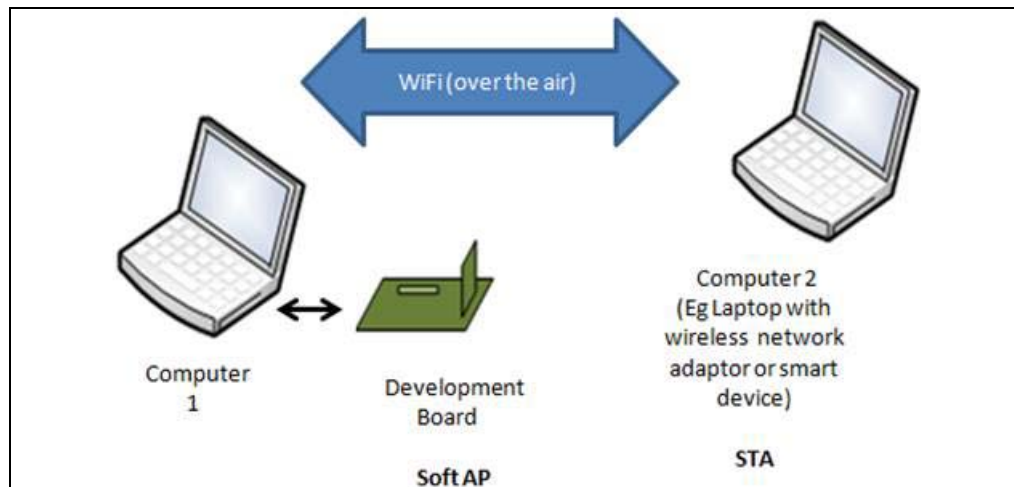

4. After the software is running on the development board, the serial output should display similar information as shown in [Figure 4-76](#). The development board is SoftAP.

Sample Application Demonstrations

FIGURE 4-76: DEVELOPMENT BOARD SERIAL OUTPUT DISPLAY (COMPUTER 1)

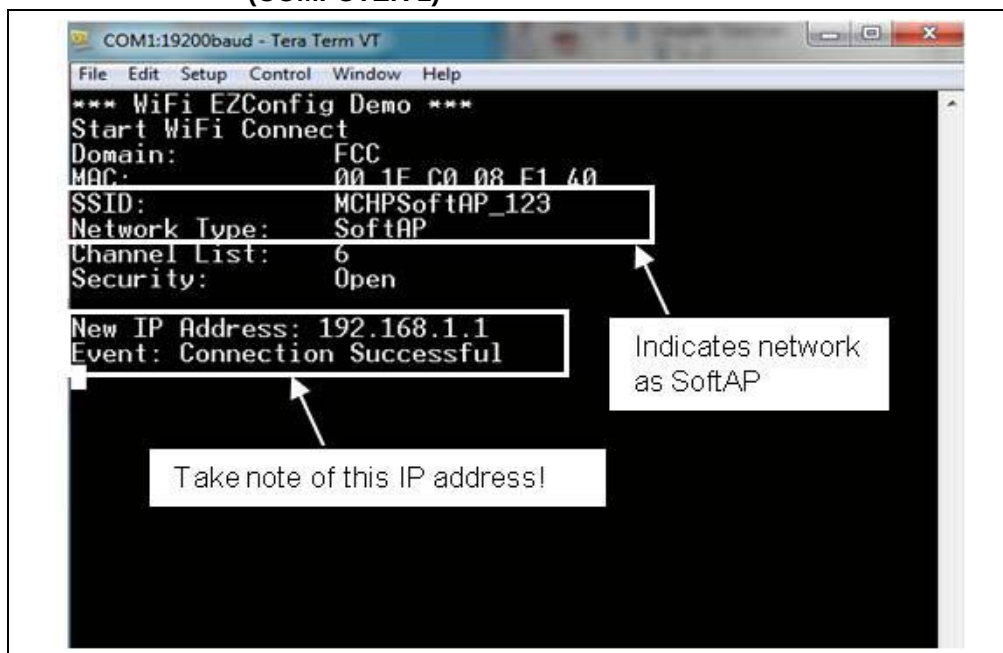


5. On computer 2, user can view the SoftAP SSID in the list of available wireless networks, see [Figure 4-77](#). Select SoftAP SSID to join SoftAP network.

FIGURE 4-77: LIST OF AVAILABLE WIRELESS NETWORK CONNECTION (COMPUTER 2)




6. On computer 2, enter `ipconfig` in the Command Prompt, the wireless connection to this Soft AP will be displayed, as shown in [Figure 4-78](#).

FIGURE 4-78: IPCONFIG WIRELESS NETWORK CONNECTION STATUS (COMPUTER 2)

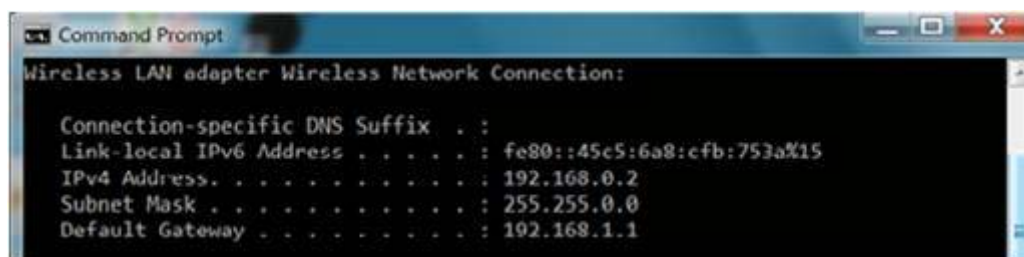


7. Similarly, ping the SoftAP, as shown in [Figure 4-79](#).

FIGURE 4-79: PINGING SOFT AP (COMPUTER 2)

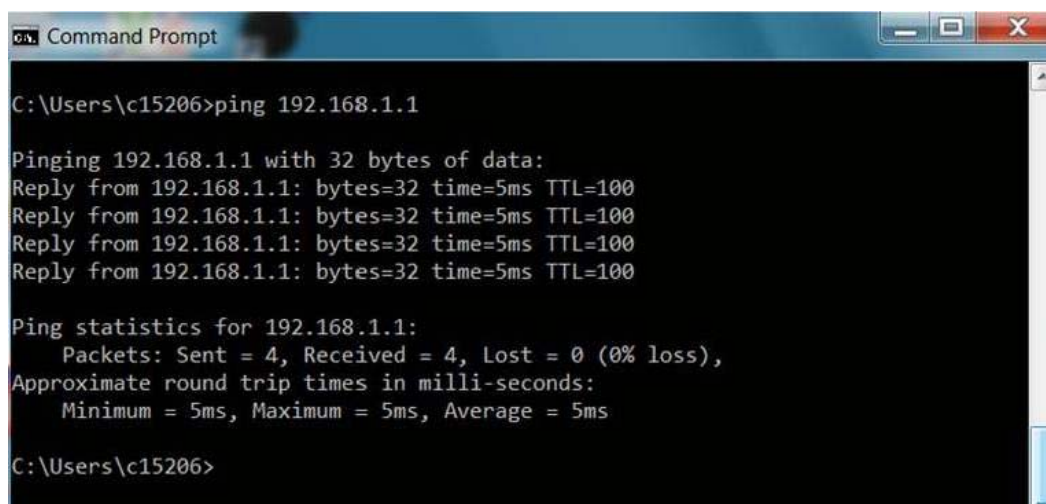

8. Run computer 2 web browser to connect to the web server of the SoftAP.

FIGURE 4-80: WEB BROWSER (COMPUTER 2)

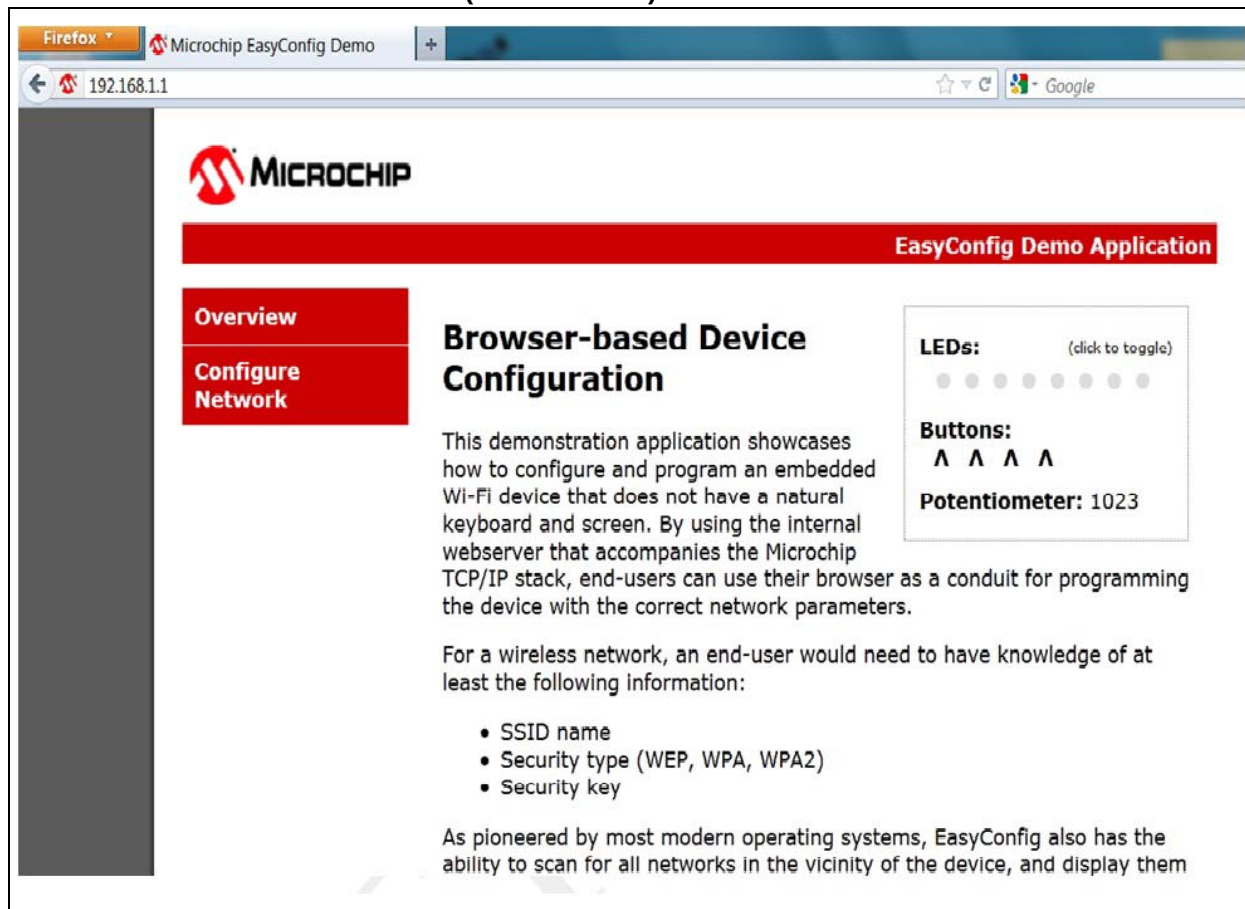

NOTES:



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Chapter 5. Microchip Development Board Specifics

5.1 PICDEM.NET 2 USAGE

This section provides instructions specific to the PICDEM.net 2 Development Board. Note the connector (J1) on the PICtail. [Table 5-1](#) provides the PICDEM.net 2 PICtail pin descriptions. If you are using Explorer 16 Development Board, skip this section.

TABLE 5-1: PICDEM.NET 2 PICTAIL PIN DESCRIPTION

Function	I/O	Pin	Descriptions
CSN	I	J1-24/RC2	SPI chip select (asserted low)
SCK	I	J1-12/RC3	SPI clock
SDO	O	J1-10/RC4	SPI data out from MRF24W
SDI	I	J1-8/RC5	SPI data in to MRF24W
INT_NX	O	J1-27	Interrupt signal from MRF24W (asserted low)
RST_N	I	J1-25/RB1	Master Reset (asserted low)
CE_N	I	J1-23/RB2	MRF24W disable (asserted low)
VDD	I	J1-26	5V power input

5.2 EXPLORER 16 USAGE

This section provides instructions specific to the Explorer 16 Development Board. If you are using PICDEM.net 2 Development Board, skip this section. The male connector (J2) on the PICtail is the female connector (J5) on the Explorer 16 Development Board. [Table 5-2](#) provides the PICDEM.net 2 PICtail pin descriptions.

TABLE 5-2: EXPLORER 16 PICTAIL PIN DESCRIPTION

Function	I/O	Pin	Descriptions
CSN	I	J2-1/RB2	SPI chip select (asserted low)
SCK	I	J2-3/RF6/SCK1	SPI clock
SDO	O	J2-5/RF7/SDI1_E	SPI data out from MRF24W
SDI	I	J2-7/RF8/SDO1_E	SPI data in to MRF24W
INT_NX	O	J2-18/RE8/INT1	Interrupt signal from MRF24W (asserted low)
RST_N	I	J2-28/RF0	Master Reset (asserted low)
CE_N	I	J2-30/RF1	MRF24W disable (asserted low)
VDD	I	J2-21 & J2-22	3.3V power input

5.3 ERASING EEPROM

When debugging, if code settings (especially related to SSID name, MAC address and so on) are not effected, then erase the EEPROM. The values in the EEPROM takes precedence over values that are defined in the source code (that is, `TCPIPConfig.h`).

To erase the EEPROM, perform these actions:

1. Ensure that the development board is programmed and not in Debug mode.
2. Disconnect the MPLAB[®] ICD 3 or MPLAB REAL ICE[™] from the Development Board.
3. Press and hold **BUTTON0** (RD13/S4 on Explorer 16 Development Board and RB3/S5 on the PICDEM.net[™] 2 Development Board).
4. Press the **MCLR** button.
5. Continue holding **BUTTON0** until several LEDs flash indicates the EEPROM is cleared. This takes about four seconds. Alternately, if UART is connected to the development board, the following output is displayed:

BUTTON0 held for more than 4 seconds.Default settings restored
6. Release the **BUTTON0**.
7. Press the **MCLR** button again to Reset the software.



MICROCHIP MRF24W GETTING STARTED GUIDE FOR MRF24WB0MA/B, MRF24WG0MA/B FOR MLA V5

Appendix A. Appendix

A.1 MICROCHIP HARDWARE

Microchip hardware, including the MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® PIC-tail™ can be purchased from Microchip Direct (<http://www.microchipdirect.com>) or from any of the Microchip distributors.

Microchip development tool MPLAB ICD 3 In-Circuit Debugger (ICD) (http://www.microchip.com/stellent/idcplg?IdcService=SS_GET_PAGE&nodeId=1406&dDocName=en537580)

A.2 MICROCHIP SOFTWARE

- TCP/IP stack source code (http://www.microchip.com/stellent/idcplg?IdcService=SS_GET_PAGE&nodeId=2680&dDocName=en537041)
- MPLAB X IDE (<http://www.microchip.com/pagehandler/en-us/family/mplabx/>)
- MPLAB XC Compiler (<http://www.microchip.com/pagehandler/en-us/devtools/mplabxc/>)

A.3 MRF24WB0MA/B OR MRF24WG0MA/B WI-FI® RESOURCES

The MRF24WB0MA/B or MRF24WG0MA/B Wi-Fi® support web site (<http://www.microchip.com/pagehandler/en-us/technology/wifi>), contains the latest information, application notes, errata, module data sheets, and other useful information.

A.4 TOOLS

- Iperf (<http://www.softpedia.com/progDownload/Iperf-Download-78352.html>)
- Wireshark PSK calculator (<http://www.wireshark.org/tools/wpa-psk.html>)
- WEP Key calculator (<http://wepkey.com>)
- WEP Key ASCII calculator (<http://www.andrewscompanies.com/tools/wep.asp>)

NOTES:

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Farmington Hills, MI
Tel: 248-538-2250
Fax: 248-538-2260

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

Santa Clara
Santa Clara, CA
Tel: 408-961-6444
Fax: 408-961-6445

Toronto
Mississauga, Ontario,
Canada
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2401-1200
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Hangzhou
Tel: 86-571-2819-3187
Fax: 86-571-2819-3189

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-2566-1512
Fax: 91-20-2566-1513

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7828
Fax: 886-7-330-9305

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Netherlands - Druenen
Tel: 31-416-690399
Fax: 31-416-690340

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

UK - Wokingham
Tel: 44-118-921-5869
Fax: 44-118-921-5820