


euro-block

product specification

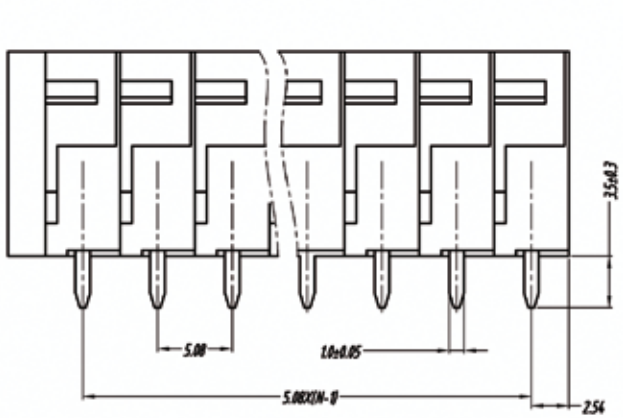


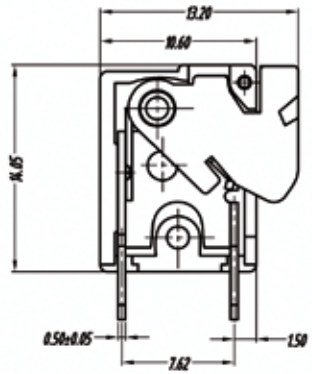

W/O COVER VIEW

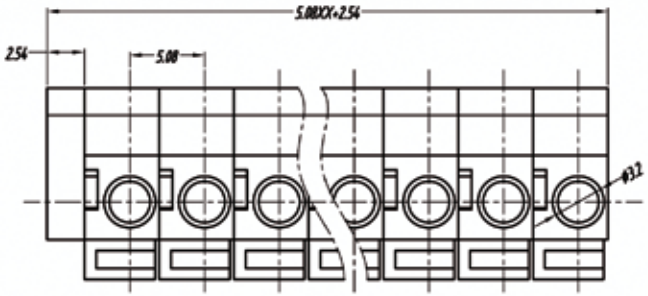

P.C.B.LAYOUT



Electrical
Standard: UL-IEC
Rated voltage: 300V-250V
Rated current: 10A-15A
Wire range: 22-12AWG-1.5mm²
Withstanding voltage: AC2000V/1Min

Mechanical
Temp.Range: -40℃~+105℃
Strip length: 10mm

Dimensions
Pitch: 5.08mm (0.200''), 7.62mm (0.300'')
Poles: 1p-xxp

Material
Housing: PA66, UL94V-0
Pin header: Phosphore bronze, Since plate
Wire guard: stainless steel

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid					—	▱	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	
euro-block					

FIRST ANGLE PROJECTION

NAME	MRM7-V