PIC GmbH • Nibelungenstr. 5A
90530 Wendelstein, Germany
Phone +49 911 99 59 06-0
Fax +49 911 99 59 06-99
info@pic-gmbh.com • www.pic-gmbh.com

# MS-328-3

## Standard Reed Sensor • Flatpack

Lead free

## Electrical Characteristics

| | | |
|---|---|---|
| **Contact form** | | A |
| **Contact rating max.** | W / VA | 10 |
| **Switching current max.** | A | 1.0 |
| **Carry current max.** | A | 1.2 |
| **Switching voltage max.** | VDC | 200 |
| | VAC | 140 |
| **Breakdown voltage min.** | VDC | 240 |
| **Contact resistance (initial) max.** | mΩ | 100 |
| **Insulation resistance min.** | Ω | $10^{10}$ |
| **Capacitance typ.** | pF | 0.5 |

## Magnetical Characteristics

| | | |
|---|---|---|
| **Pull in range available** [1] | AT | 10-25 |


[1] AT range stated for **unmodified** Reed Switch

## Operating Characteristics

| | | |
|---|---|---|
| **Operate time (incl. bounce) max.** | ms | 1.0 |
| **Release time max.** | ms | 0.4 |
| **Switching frequency max.** | Hz | 500 |
| **Resonant frequency typ.** | Hz | 4,000 |
| **Vibration (50-2000 Hz)** | g | 20 |
| **Shock (1/2 sin 11 ms)** | g | 100 |
| **Operating temperature** | °C | -20 to +85 |

## Dimensions

in mm

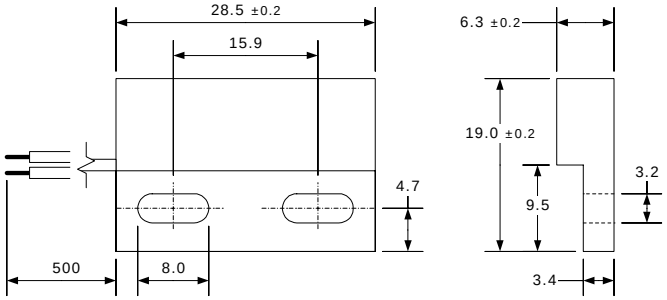


Wire: AWG 20, black, stripped and tinned

## Ordering Information

| Series | AT Range |
|---|---|
| MS-328-3 | **1** = 10-15 / **2** = 15-20 / **3** = 20-25 |

**Ordering example:** MS-328-3-2 describes MS-328-3 with 15-20 AT

**Customized types available.**

© PIC GmbH, Nürnberg (GERMANY)

PIC GmbH • Nibelungenstr. 5A
90530 Wendelstein, Germany
Phone +49 911 99 59 06-0
Fax +49 911 99 59 06-99
info@pic-gmbh.com • www.pic-gmbh.com


# MS-328-3

## Standard Reed Sensor • Flatpack

Lead free

## Matching Actuator MSM-328

in mm

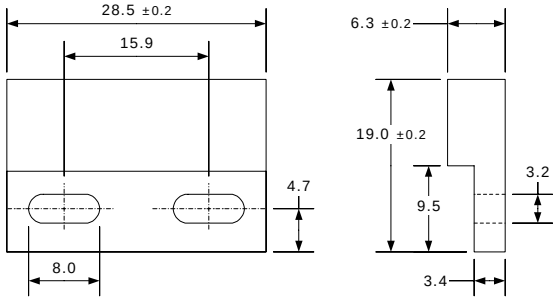


**Customized types and other magnet orientations available.**