


Major League Electronics .100 cl Multi Shunt

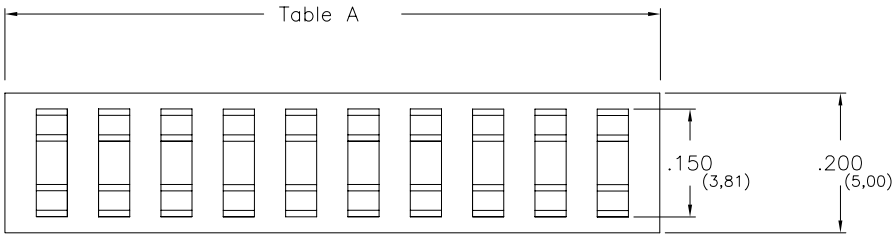

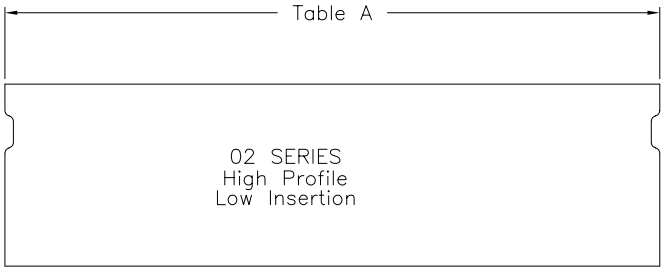

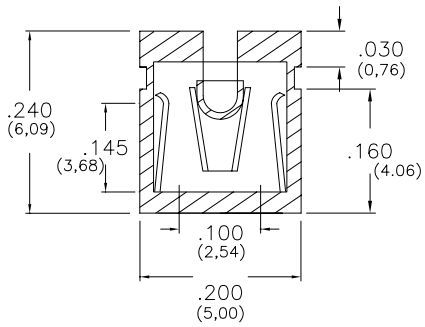

Ordering Information

MSH-1 [X] – [01] – [XX] – [LF]


Lead Free

Plating Options	
- Matte Tin all Over	T
- 10µ Gold on Contact area/Flash on Tail	G

Shunt Style

No. of Shunts	Dim. A
02	.200
03	.300
04	.400
05	.500
06	.600
07	.700
08	.800
09	.900
10	1.000

Specifications
Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20 mΩ Max.
Operating Temperature: -40°C to + 105°C
Max. Process Temperature:
Peak: 260°C up to 10 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Manual Solder: 350°C up to 5 secs.



Materials
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T

Products cut to specific sizes are uncancellable/nonreturnable — Parts are subject to change without notice

MSH-1-01 SERIES	.100 cl Multi Shunt	17 JAN 07	Scale NTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES ARE:
ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020
ANGLES ±5°

4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision B

Revisions

Revision B - (8th Feb 2008)

Amendment to Dimension A column in ordering grid

MSH-1-01 SERIES	.100 cl Multi Shunt	17 JAN 07	Scale NTS
UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES ARE: ONE PLACE DECIMALS ±.100 TWO PLACE DECIMALS ±.010 THREE PLACE DECIMALS ±.005 FOUR PLACE DECIMALS ±.0020 ANGLES ±5°	Major League ELECTRONICS	4235 Earnings Way, New Albany, Indiana, 47150, USA 1-800-782-3486 (USA/Canada/Mexico) Tel: 812-944-7244 Fax: 812-944-7268 E-mail: mle@mlelectronics.com Web: www.mlelectronics.com	Revision B Sheet 2/2